MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS-1963-A

FOR FURTHER TRAN
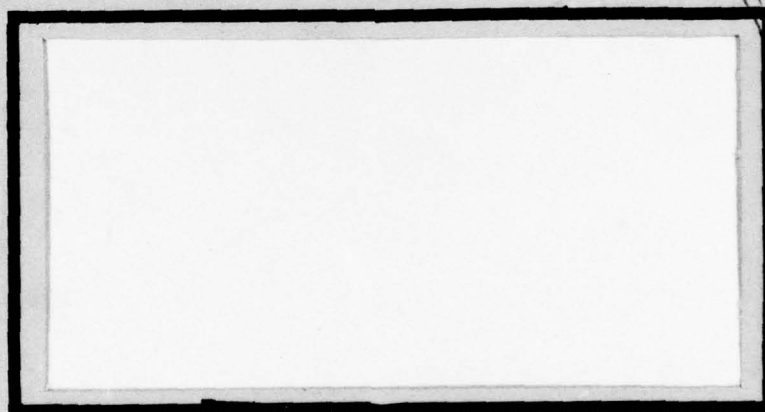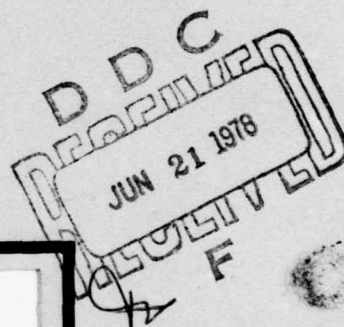
①

AF INSTITUTE OF TECHNOLOGY

UNITED STATES AIR FORCE

AIR UNIVERSITY

AIR FORCE INSTITUTE OF TECHNOLOGY

Wright-Patterson Air Force Base, Ohio

78 06 15 066

PITCH RATE FLIGHT CONTROL
FOR THE F-16 AIRCRAFT TO
IMPROVE AIR-TO-AIR COMBAT

THESIS

AFIT/GGC/EE/77-7   Michael A. Marchand
                    Capt   USAF

AFIT/GGC/EE/77-7

PITCH RATE FLIGHT CONTROL

FOR THE F-16 AIRCRAFT TO

IMPROVE AIR-TO-AIR COMBAT

THESIS   Master's thesis,

Presented to the Faculty of the School of Engineering

of the Air Force Institute of Technology

Air University

in Partial Fulfillment of the

Requirements for the Degree of

Master of Science

by

Michael A. Marchand

Capt   USAF

Graduate Electrical Engineering

December 1977

78 06 15 066

Preface

The objective of this study was to determine the feasibility of implementing a pitch rate control system for the F-16 aircraft to improve air-to-air combat.

Contents

iii

Contents

List of Figures

List of Tables

List of Symbols

Symbol	Meaning	Page
q_c	Dynamic pressure adjusted for compressibility	21
R	Angular yaw velocity	30
RMS	Root mean square	81
TAWDS	Terminal Aerial Weapon Delivery Simulation	67
T_p	Peak time of time response	63
T_r	Rise time of time response	63
T_s	Settling time of time response	63
U_{co}	Cross-over velocity	4
u	Aircraft forward velocity pertubation	29
V	Relative wind	29
v	Aircraft lateral velocity pertubation	29
w	Aircraft vertical velocity pertubation	29
$X, X_{Body}, X_{Stability}$	Aircraft axis (positive-opposite air flow)	29
$Y, Y_{Body}, Y_{Stability}$	Aircraft axis (positive-out right wing)	29
$Z, Z_{Body}, Z_{Stability}$	Aircraft axis (positive-down)	29
α	Angle of attack	39
$\dot{\alpha}$	Angle of attack rate	39
β	Sideslip angle	29
δ_e	Elevator deflection	39
δ_{F_L}	Flaperon deflection (left)	30

Symbol	Meaning	Page
δ_{F_R}	Flaperon deflection (right)	30
δ_{H_L}	Horizontal stabilator deflection (left)	30
δ_{H_R}	Horizontal stabilator deflection (right)	30
δ_{LEF}	Leading edge flap deflection	30
δ_R	Rudder deflection	30
ϕ	Aircraft bank angle	17
ϕ_c	Phase margin angle (crossover)	63
θ	Aircraft pitch angle	49
$\dot{\theta}$	Aircraft pitch angle rate	3
$\ddot{\theta}$	Aircraft pitch angle acceleration	3
ω	Frequency	17
ω_c	Phase margin crossover frequency	63
ω_m	Peak frequency	63
τ	Time delay	17
ζ	Damping ratio	17

Abstract

Digital simulations were developed to implement a pitch rate control system for the F-16 aircraft engaged in aerial gunnery. First, the EASY Modelling and Analysis Program by Boeing Computer Services was adapted to implement a longitudinal axis F-16 aircraft, flight control system, and pilot model. Comparison of closed loop system responses indicated a proposed pitch rate flight control configuration would improve target tracking performance. The Terminal Aerial Weapon Delivery Simulation (TAWDS) program by McDonnell Douglas Corporation was adapted for the F-16 aircraft. A non-linear, six-degree-of-freedom aircraft model, multi-axis flight control system, and multi-axis pilot model were developed to demonstrate target tracking capabilities. Eight different air-to-air scenarios were developed to simulate evasive encounters with an F-4 target aircraft. Time history target tracking errors indicated the improved tracking performance of the proposed pitch rate flight control configuration over the present normal acceleration configuration of the F-16 aircraft.

PITCH RATE FLIGHT CONTROL
FOR THE F-16 AIRCRAFT TO
IMPROVE AIR-TO-AIR COMBAT

I. Introduction

One of the most challenging tasks facing today's tactical fighter pilot is that of air-to-air gunnery. When engaged in aerial combat with an enemy aircraft, today's fighter pilot must maintain an offensive role by tracking his target. To be successful, he must achieve a target tracking solution that allows him to deliver his weapons quickly and accurately. All too often, this task requires more skill and control precision than the pilot is able to provide.

During recent years, considerable USAF and industrial efforts have been directed to developing advanced tactical aircraft flight control systems to improve weapon delivery accuracy. The most promising of these engineering efforts involves integration of aircraft flight and fire control systems. The benefits of automatic flight control, coupled with automatic weapon delivery, will allow a fighter pilot, while engaged in air-to-air aerial combat, to select a degree of automation to assist him in both flying his

1

aircraft and firing his weapons more effectively. This
could range from a manual system to a fully automatic mode
of operation. Preliminary investigations have shown that
weapon delivery accuracy can be improved by coupling air-
craft flight control and weapon delivery fire control
systems to relieve the fighter pilot of his ever increas-
ing workload (Ref 1). However, the possibility also exists
of improving weapon delivery effectiveness by conditioning
flight control systems without removing the pilot from his
primary tasks. Manual flight control investigations of im-
proving aerial gunnery will be considered in this study.

Flight Control System Background

The performance of air superiority aircraft such as the
McDonnell Douglas F-15 or the General Dynamics F-16 in air
combat maneuvers places unusual and heavy demands on the
flight control system. This is true because today's high
performance aircraft are operated over extremely wide flight
envelopes. In addition to using the total altitude and Mach
range, the pilot exercises the aircraft through its full
angle of attack capabilities during air combat (Ref 2).

To aid the pilot in his primary task, handling quality
specifications have been designed using a weighted combina-
tion of pitch rate, normal acceleration, and pitching

2

acceleration criteria (Ref 3). Aircraft flight test perform-
ance ratings have indicated a pilot preference of this
blended system for normal cruise maneuvers. As a conse-
quence, several systems have been built which combine
pitch rate and normal acceleration as the feedback variables.

One method for mechanizing the flight control system
feel/response is the C* approach that was first proposed
by Boeing aircraft design engineers (Ref 3). This approach
uses a linear blend of normal acceleration, pitch rate, and
pitch acceleration. The weighted control combination can
be described as follows:

$$C^* = k_1 A_n + k_2 \dot{\theta} + k_3 \ddot{\theta} \tag{1}$$

where

A_n = normal acceleration at c.g.

$\dot{\theta}$ = pitch rate

$\ddot{\theta}$ = pitch acceleration

The C* equation can also be defined in g's where the
units of k_2 are equivalent to a velocity divided by gravity
(g) and k_3 is equivalent to the distance between the linear
accelerometer and the center of gravity of the aircraft
divided by g. Using $k_1 = 1$, Equation (1) can be written as:

3

$$C^* = A_n + \frac{U_{co}\dot{\theta}}{g} + \frac{L\ddot{\theta}}{g} \qquad (2)$$

where

U_{co} = the cross-over velocity (approximately 400 ft/sec)

L = distance between linear accelerometer and the

center of gravity of the aircraft.

Selection of the cross-over velocity specifies the operating point at which the control contributions of pitch rate and normal acceleration feedback are equal. At lower airspeeds, such as in landing approaches where the control surfaces are relatively less responsive than at cruise flight, the pitch rate feedback is predominant. At airspeeds above the cross-over velocity, in flight regions where the aircraft control surfaces are relatively more responsive than at lower airspeeds, the normal acceleration feedback is predominant. The C* approach is convenient for the mechanization of a feel system because of the ease by which the pitch rate, pitch acceleration, and normal accelerations can be measured (Ref 3).

Gunsight Technology

Although present technology has developed very advanced flight control systems that could be used in the integration of flight and fire control systems, a key limiting factor in

advancing air-to-air combat is target tracking systems. The aircraft gunsight is mechanized to compute and display to the pilot the lead angle required to hit the target. This is generally done by displacing an aiming reticle for the required lead angle from some gunsight reference line to the target. Essentially, if the pilot flies his aircraft so as to keep the reticle on the target, he then is maintaining the proper lead angle to achieve a target hit (Ref 2).

For many years, target tracking has been accomplished using a disturbed reticle sight. The most popular of these sights and the one that is used on most present day fighter aircraft is the Lead Computing Optical Sight System (LCOSS). The LCOSS generates a gunsight lead angle based on the attacker aircraft's own dynamics. The attacker aircraft's own body rates, load factor, angle of attack, and airspeed are used to determine a gunsight lead angle solution. To achieve a continuous target tracking solution with the LCOSS sight, the pilot must fly his aircraft to remain in the same plane of motion as the target aircraft.

In contrast to the LCOSS, a new director gunsight is presently being developed and demonstration flight test programs are scheduled to begin in the near future. Generally, the director sight incorporates actual measurements

5

of target aircraft motion to determine a gunsight solution.
Line of sight angle rate and position measurements are used
in the director sight instead of own-ship body rates as in
the LCOSS. The director system employs a tracking device
such as an angle tracking radar or an electro-optical tracker
to measure target motion. With actual target measurements,
the director system incorporates a Kalman filter to determine
the expected future target position (Ref 4).

Objective

The primary objective of this study will be to compare
the target tracking performance of a director gunsight im-
plementation for manual flight control involving two air-
craft flight control configurations. Present handling qual-
ities specifications, supported by Cooper-Harper pilot rat-
ings have indicated that normal acceleration feedback may
be effective for most flight conditions. However, a pitch
rate flight control scheme will be investigated to improve
aerial gunnery during air-to-air combat. Since the director
gunsight incorporates actual target measurements of angular
error and angular error rate, it seems appropriate that a
pitch rate control feedback scheme could be employed to
provide improvements in manual target tracking systems.

Plan of Attack

To begin the investigation of pitch rate control, it was necessary to select an aircraft whose flight control system incorporates the C* concept. Selection of the F-16 flight control system as a candidate system is discussed in Chapter II. Considerations of a flight condition and air-craft characteristics are also included in Chapter II.

Implementation of a representative F-16 pilot model is discussed in Chapter III. This analytical representation allowed a closed loop system to be established for man-in-the-loop simulations necessary for manual flight control evaluation.

A digital simulation of the F-16 aircraft dynamics, flight control system, and pilot model is developed in Chapter IV. Analysis of the present F-16 flight control system is described along with the investigation of a predominately pitch rate control configuration.

A second digital simulation program is discussed in Chapter V. A non-linear six-degree-of-freedom aircraft, flight control model, and multi-axis pilot model is de-veloped to provide a closed loop simulation. To provide realistic target tracking encounters, a series of eight different air-to-air combat scenarios is developed.

The results of the air-to-air encounters using a director gunsight implementation is included in Chapter V. Time history simulation data is generated to measure the target tracking performance of both the present normal acceleration flight control configuration of the F-16 aircraft and the new proposed pitch rate flight control system.

II. Aircraft Selection

Selection Criteria

The F-16 fighter aircraft built by General Dynamics Corporation was selected as the baseline aircraft simulation model. The F-16 was chosen because it represents the present state of the art in fighter aircraft design. Its fly-by-wire flight control system enabled design engineers to harness a basically unstable aircraft and obtain unprecedented flight performance. The design of this flight control system incorporates the C* concept discussed in Chapter I (Ref 3). The F-16 flight control system incorporates angle of attack, pitch rate, and normal acceleration feedback. As the C* concept implies, normal acceleration feedback is predominant at cruise airspeeds. A blending of normal acceleration and pitch rate feedback is employed in the longitudinal axis control system. In addition, angle of attack (i.e. alpha) is fed back to the flight control system to aid stability and achieve alpha limiting at high angles of attack. This unique configuration makes the F-16 aircraft a very likely candidate to examine various flight control configurations and incorporate these into a manual flight/fire control system evaluation (Ref 5).

In addition to this interesting flight control configuration, the F-16 was selected because of the ongoing joint programs between the Air Force Flight Dynamics Laboratory and General Electric Company. Their continuing investigations of integrating flight and fire control systems has recently included a manned simulation program using the F-16 as a baseline aircraft model (Ref 1).

Aircraft Model Description

To complement the efforts of the Air Force Flight Dynamics Laboratory and General Electric Company, realistic scenarios were developed for the simulation. The air-to-air encounters were set with the F-16 aircraft in its clean configuration at a cruise airspeed of .8 Mach and altitude of 20,000 feet MSL. It was from this cruising flight condition that the attacker aircraft would engage the enemy target. Assuming that the pilot had fired his two available Sidewinder missiles, he was equipped with only his 20-millimeter M-61 conventional cannon with which to continue the engagement.

To validate the aircraft dynamics of the modelling programs, F-16 aircraft dynamic simulation data obtained from the Air Force Flight Dynamics Laboratory LAMARS facility was selected as the desired test case. A digital

10

program by John Griffin (Ref 6) provided aerodynamic data for computer validation of selected aircraft configurations and flight conditions for the F-16 manned simulations in the LAMARS facility. This data serves as a basis for the F-16 digital simulations to be developed. Table I describes the F-16 aircraft model characteristics of the test case selected. A more complete aircraft model description and detailed listing of the flight condition stability derivatives are shown in Appendix B.

Table I
F-16 Aircraft Model Characteristics
(Ref 6)

Flight Condition

Altitude	-	20,000 ft
Airspeed	-	.8 Mach
		(829.5 ft/sec @ 20,000 ft)
Dynamic pressure	-	436.06 lbs/ft^2
Air Density	-	.001267 slug-ft^3

Aircraft

Clean configuration		
Gross weight	-	19,000 lbs
Mass	-	590.5 slugs
c.g. location	-	33.92% mean aerodynamic chord (MAC)
Chordlength	-	11.32 ft
Wing span	-	30 ft
Wing area	-	300 ft^2
Moments of Inertia		
XX-axis	-	9007.5 slugs-ft^2
YY-axis	-	49956. slugs-ft^2
ZZ-axis	-	56770. slugs-ft^2
XZ-axis	-	198.0 slugs-ft^2

Trim Flight Condition Parameters

Load factor	-	1 g (32.174 ft/sec^2)
Flight path angle	-	0 degrees
Angle of attack	-	2.1039 degrees
Stabilator (elevator)	-	-1.9123 degrees (up deflection)

Armament

M-61 gun	-	20 mm ammunition
	-	3400 ft/sec muzzle velocity
	-	6000 rounds/minute

III. Pilot Model Development

Basic F-4 Aircraft Pilot Model Description

In order to implement a closed loop system performance analysis, an F-16 multi-axis pilot model was required. Manned simulation efforts by McDonnell Douglas Corporation have been instrumental in the development of an analytical pilot model for the F-4E aircraft. Their mathematical model was developed from target tracking data produced by two USAF pilots flying in the MCAIR flight simulator (Ref 7). In simulating air-to-air weapon delivery, a data base was provided by measuring aircraft tracking time histories, pilot tracking task responses, statistical tracking performance and weapon delivery performance. The pilots were required to track a target aircraft through programmed maneuvers while their tracking performance responses were documented.

Although efforts of McDonnell Douglas were directed to developing an F-4E aircraft pilot model, they determined from time history data that pilot elevation and traverse tracking error characteristics were similar regardless of the pilot, the weapon delivery task, aircraft flying qualities, or sight system characteristics. The results of the McDonnell Douglas study indicated that elevation tracking error contained two predominant modal components. This was

13

due to the pilot's interaction with the aircraft's short period dynamics and the sight dynamics. Both frequency components were observed to exhibit a limited or lightly damped response. Their study of pilot responses indicates that the longitudinal pilot model treats the pilot as a proportional-plus-derivative observer of the tracking error. The pilot threshold limit of error rate is indicated by use of a dead zone in the error rate channel. This proportional-plus-derivative observer of elevation angular error results in a tracking error projected a time interval into the future. This projected error is then coupled with the output of a low pass filter to determine the pilot's rate input to the control stick. Integrating this control stick rate provides the control stick position or stick force that determines the pilot model response to the flight control system. The pilot model schematic is shown in Figure 1.

Just as in the longitudinal pilot model, the lateral-directional model is based on the assumption that the pilot acts as a proportional-plus-derivative observer of the traverse tracking error with the dead zone on the error rate. However, additional visual ques that the pilot may perceive in traverse tracking are incorporated in the lateral-directional pilot model. This includes feedback of attacker

14
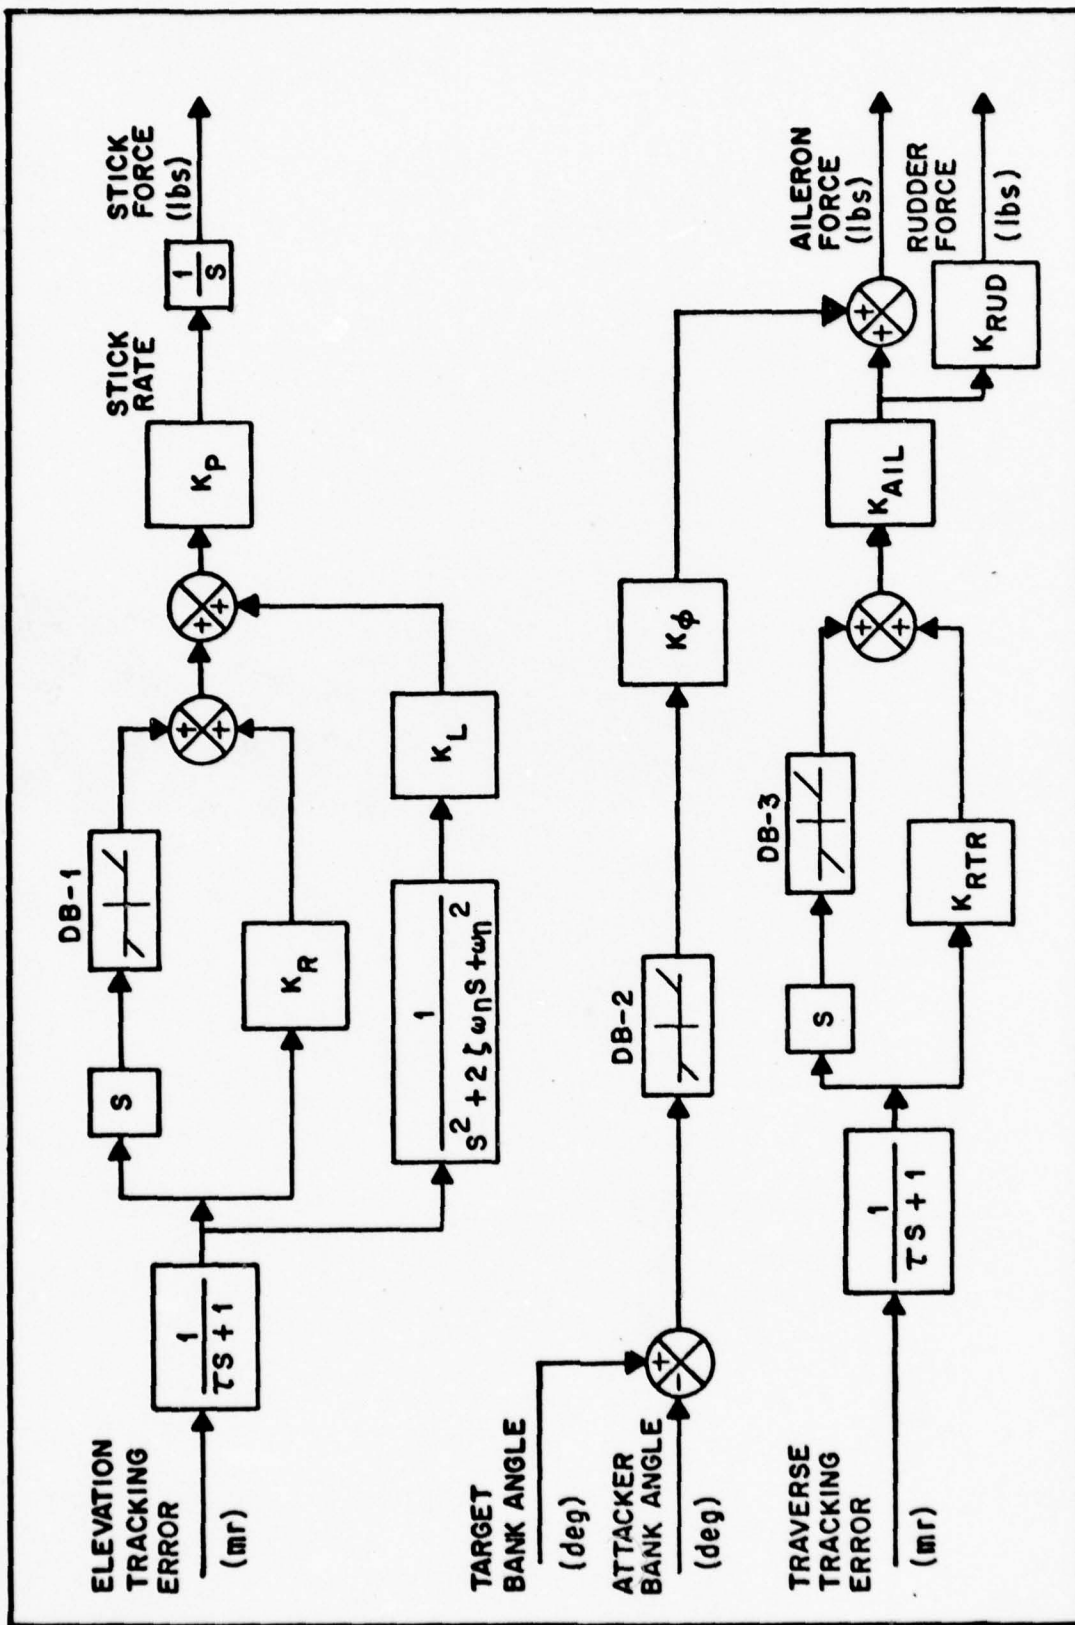
Figure 1. Multi-Axis Pilot Model for Air-to-Air Aerial Gunnery (Longitudinal and Lateral-Directional Axes) (Ref 7)

15

aircraft bank angle relative to the target aircraft. This additional input, which incorporates a dead band for threshold limits, is used to modify the lateral stick commands based on traverse tracking error.

The schematic diagram of the longitudinal and lateral-directional multi-axis pilot model developed by McDonnell Douglas is shown in Figure 1. A root locus stability analysis of the pilot model transfer function was used to determine how the parameters of the pilot model affect closed loop system stability and control during weapon delivery. Both the director sight and the lead computing optical sight system were used in the air-to-air gunnery investigation and pilot model validation. Tracking performance time histories and frequency responses of the pilot model performing weapon delivery tasks closely represented those of the human pilot in the manned simulations (Ref 7).

F-16 Aircraft Pilot Model Description

Unfortunately, the gain parameters of the pilot model developed by McDonnell Douglas for the F-4 aircraft configuration was not sufficient for an F-16 simulation. Since this basic model was not compatible with the F-16 aerodynamic and flight control characteristics, an effort was made by General Dynamics to adapt this basic F-4 pilot model to the

16

aircraft bank angle relative to the target aircraft. This additional input, which incorporates a dead band for threshold limits, is used to modify the lateral stick commands based on traverse tracking error.

The schematic diagram of the longitudinal and lateral-directional multi-axis pilot model developed by McDonnell Douglas is shown in Figure 1. A root locus stability analysis of the pilot model transfer function was used to determine how the parameters of the pilot model affect closed loop system stability and control during weapon delivery. Both the director sight and the lead computing optical sight system were used in the air-to-air gunnery investigation and pilot model validation. Tracking performance time histories and frequency responses of the pilot model performing weapon delivery tasks closely represented those of the human pilot in the manned simulations (Ref 7).

F-16 Aircraft Pilot Model Description

Unfortunately, the gain parameters of the pilot model developed by McDonnell Douglas for the F-4 aircraft configuration was not sufficient for an F-16 simulation. Since this basic model was not compatible with the F-16 aerodynamic and flight control characteristics, an effort was made by General Dynamics to adapt this basic F-4 pilot model to the

16

F-16 aerodynamic and flight control characteristics. Their
approach was first a pilot model gain study followed by a
comparison of flight test data with manned simulation re-
sults. Their study provided a multi-axis pilot model that
produced fairly adequate tracking performance for a stabi-
lized 5 g target aircraft model. Table II indicates the
parameter gain values of the multi-axis pilot model adapted
for this simulation. The parameters of the pilot model
shown are for employing the director sight system. Pilot
performance variations while employing the LCOS system are
included by the gain changes as indicated by the asterisk
(Ref 8).

Table II
Parameter Values of the F-16 Pilot Model
Implementing Director Sight (Ref 8)

τ	ω	ζ	K_R	K_L	K_p*	K_ϕ
.05	1.0	0.6	.125	.125	.25	.0573

K_{AIL}*	K_{RTR}	K_{RUD}	DB-1	DB-2	DB-3
.10	1.5	0.0	1mr/sec	5 deg	2.5mr/sec

*To implement the LCOS, the above parameters remain the same
except:
$$K_{AIL} = .17$$
$$K_p = .20$$

17

IV. Development of the Analysis Model

EASY Program Discussion

To aid in the analysis of the present flight control configuration and implementation of a pitch rate controller, the EASY Modelling and Analysis Program by Boeing Computer Service was adapted (Ref 9). The EASY program package consists of two programs which allow the modelling and analysis of dynamic aircraft systems in both steady state and dynamic behavior. The first of these is the EASY Model Generation program. This pre-compiler program accepts model description instructions from the programmer and from these instructions generates a FORTRAN model of the aircraft system. The output of the EASY model program is a complete system model description including a computer generated schematic diagram showing inter-connections between the components of the constructed model. Standard EASY components used include aircraft modelling components and control system components. The computerized model was analyzed using the linear, non-linear, steady state, and dynamic techniques available in the EASY Analysis program. FORTRAN statements, referred to as "program commands", allowed the analysis to include non-linear simulation, steady state calculations, linear model generation from the original non-linear model,

18

eigenvalue calculation, root locus analysis, transfer
function calculation and several other dynamic analysis
techniques.

F-16 EASY Model

The EASY Model Generation program was begun by develop-
ing a schematic diagram of the longitudinal axis of the F-16
flight control system. The fold-out of Figure 2 indicates
the present F-16 aircraft control configuration. Simplifi-
cations of the pitch axis system (upper left of Figure 2)
were made for the EASY model program. The aircraft flight
condition chosen was .8 Mach at 20,000 feet and the aircraft
model configuration was that for cruise flight with no
pitch trim nor pitch autopilot included. Trailing edge
flaps were not implemented and, because very little control
blending occurs at cruise airspeeds, the differential tail
deflection of the F-16 aircraft was also not modelled.
Instead, it was assumed that the aircraft exhibits conven-
tional elevator deflections. Assuming rigid body dynamics,
the high frequency structural filters were also omitted.
The resulting F-16 longitudinal flight control system
modelled for the EASY analysis program is shown in the
schematic diagram of Figure 3 (Ref 10).

F-16 FLIGHT CONTROL SYSTEM FUN...

Figure 2. Present F-1...

GENERAL DYNAMICS
Fort Worth Division

LIGHT CONTROL SYSTEM FUNCTIONAL BLOCK DIAGRAM

Figure 2. Present F-16 Flight Control System Diagram (Ref 11)

20
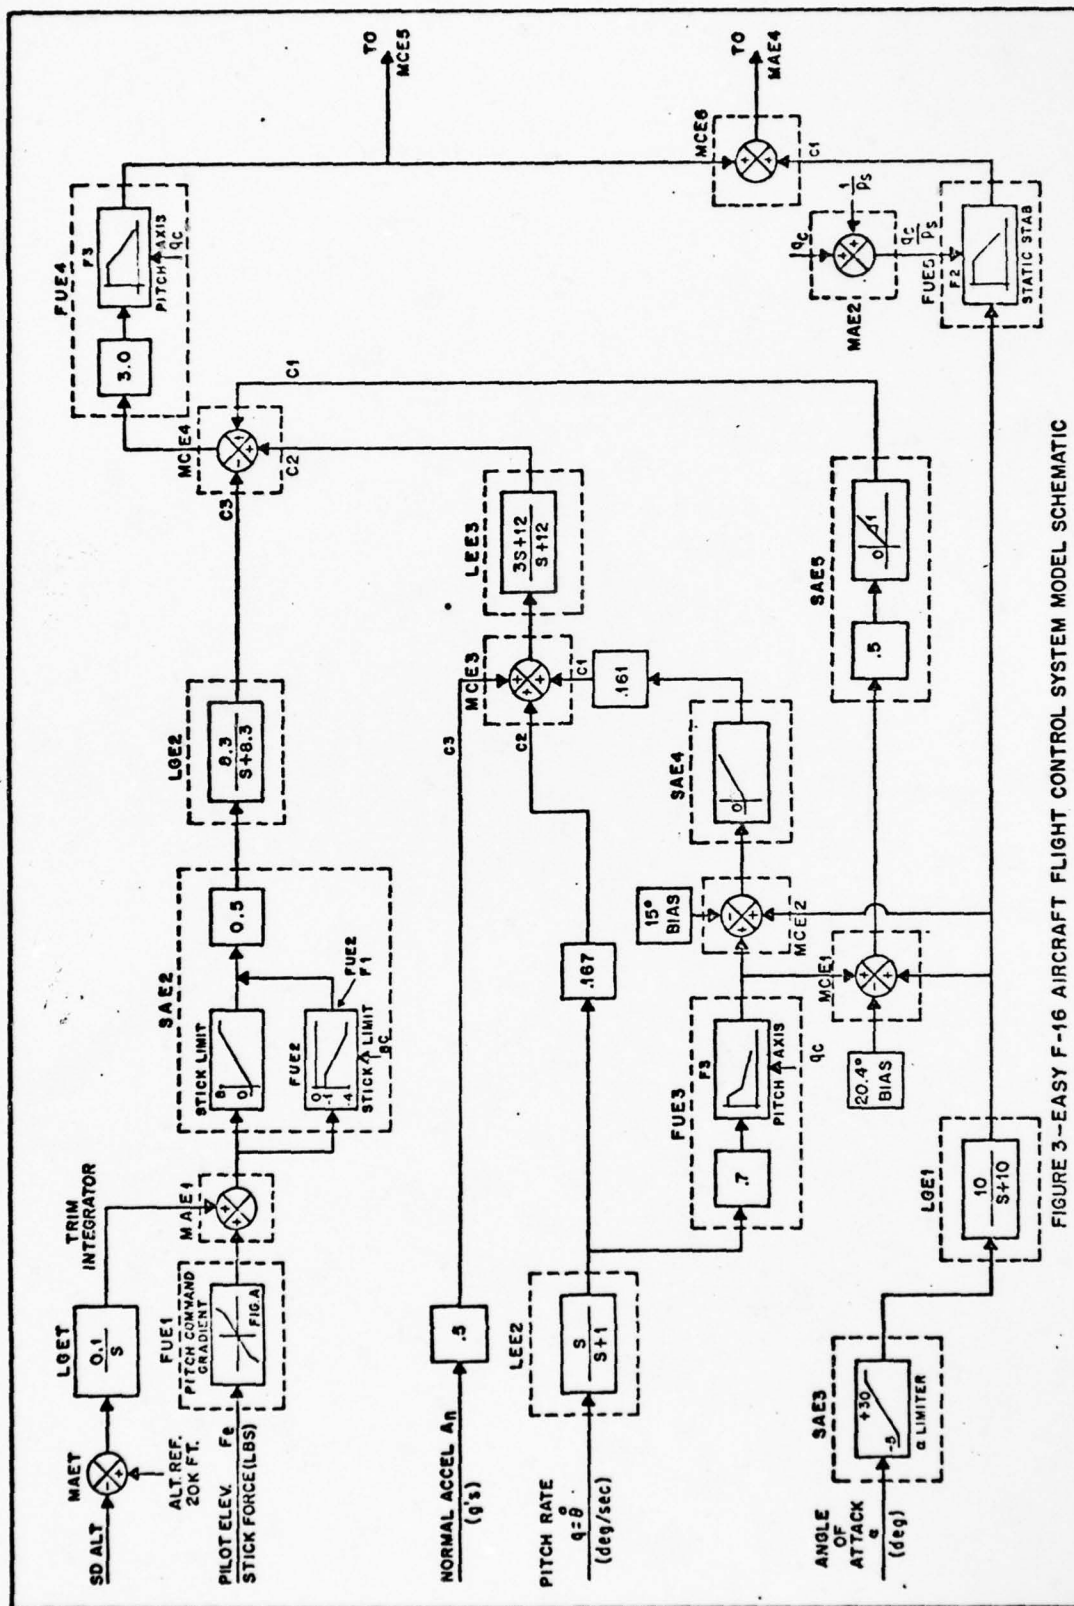
FIGURE 3—EASY F-16 AIRCRAFT FLIGHT CONTROL SYSTEM MODEL SCHEMATIC

Figure 3. EASY F-16 Aircraft Flight Control System Model Schematic

21
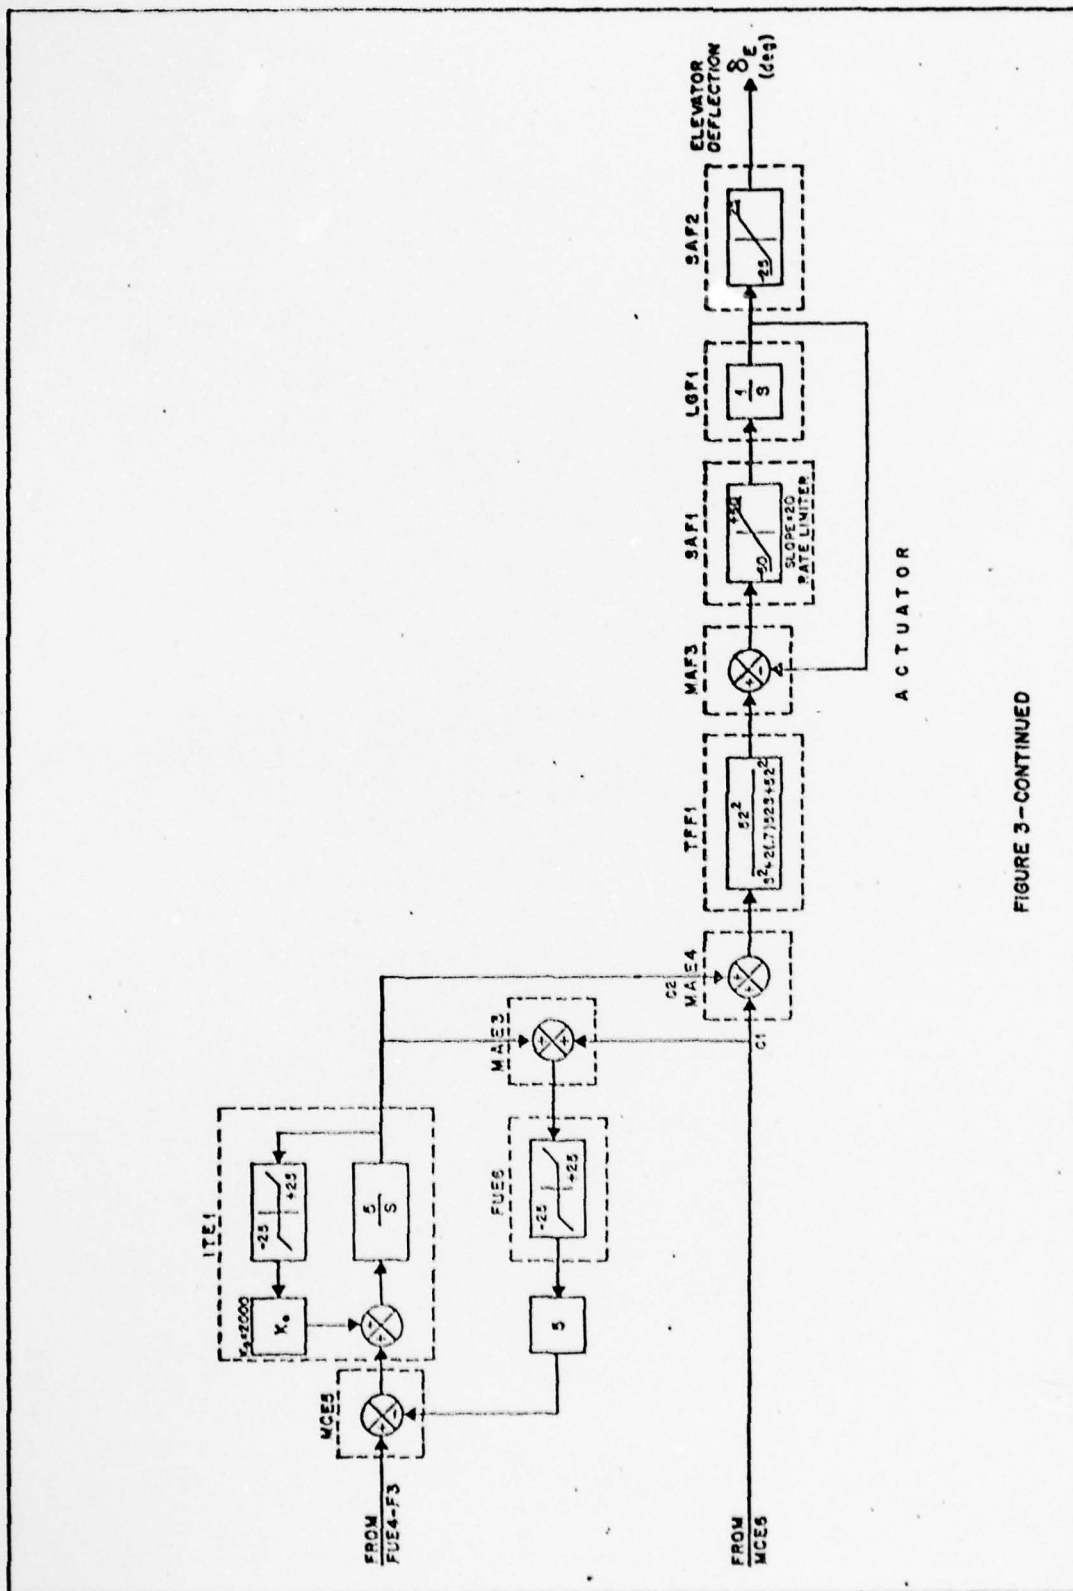
FIGURE 3—CONTINUED

Figure 3. Continued

22

Only standard components of the EASY program were necessary to complete the flight control system modelling. The dash boxes around the elements in the control system diagram of Figure 3 indicate each standard component used. For example, the FU components indicate table look-up functions. These include both the pitch command gradient and gain scheduled variables that are functions of dynamic and static pressure. The LA and LG components were used to model first order lag transfer functions. First order lead-lag transfer functions were modelled with the LE component. The multiply and add components, MA and MC, were used to model the summing junctions. Second order transfer functions such as in the elevator actuator were modelled using the TF component. Limiting functions or saturation function components, SA, were used to regulate the pilot commanded maximum g forces, angle of attack, actuator rates, and elevator deflection.

In addition to specifying the F-16 flight control system components, the aircraft dynamic modelling was necessary. Description of the aircraft motion centered around the standard components AV, LO, and SD. The AV component uses the aircraft states to compute aerodynamic variables such as angle of attack, airspeed, body rates, etc.

The longitudinal aerodynamic component, LO, computes the longitudinal aerodynamic forces and moments. The six-degree-of-freedom equations of motion component, SD, contains the rigid body dynamic equations for integrating the aircraft states and is driven by the aerodynamic variables generated in LO.

In addition to the aircraft and flight control system model, the longitudinal pilot model described in Chapter III was also implemented into the EASY program. Again, standard components were used to complete the pilot model description as shown in the schematic diagram of Figure 4. This pilot model implementation incorporates parameter requirements for the director sight. Although the description appears different from that of Figure 1, p. 16, a mathematically equivalent model is shown. The time delay component of Figure 1 has been incorporated in both the proportional and derivative channels of the longitudinal pilot model. In addition, Figure 4 indicates the pseudo target tracking task of the pilot model for the EASY analysis. A closed loop system was achieved by feeding back the attacker aircraft pitch angle. This pitch angle was compared to a reference angle to allow performance evaluations of system response to step inputs. The aircraft pitch angle was chosen since

STICK
FORCE
(lbs)

LGPL
$$\frac{.25}{S}$$

C1

MCPL

C3

C2

SAPL

.0573 deg/sec
DEADBAND

TFPL
$$\frac{1.0}{S^2 + 1.2S + 1.0}$$

LEPL
$$\frac{349.9}{S + 20.0}$$

LAPL
$$\frac{2.1815}{.05S + 1.0}$$

PSEUDO
ELEVATION
TRACKING
ERROR
(deg)

MAPL

PITSD
(deg)
AIRCRAFT
PITCH
ANGLE

θ REF
(deg)
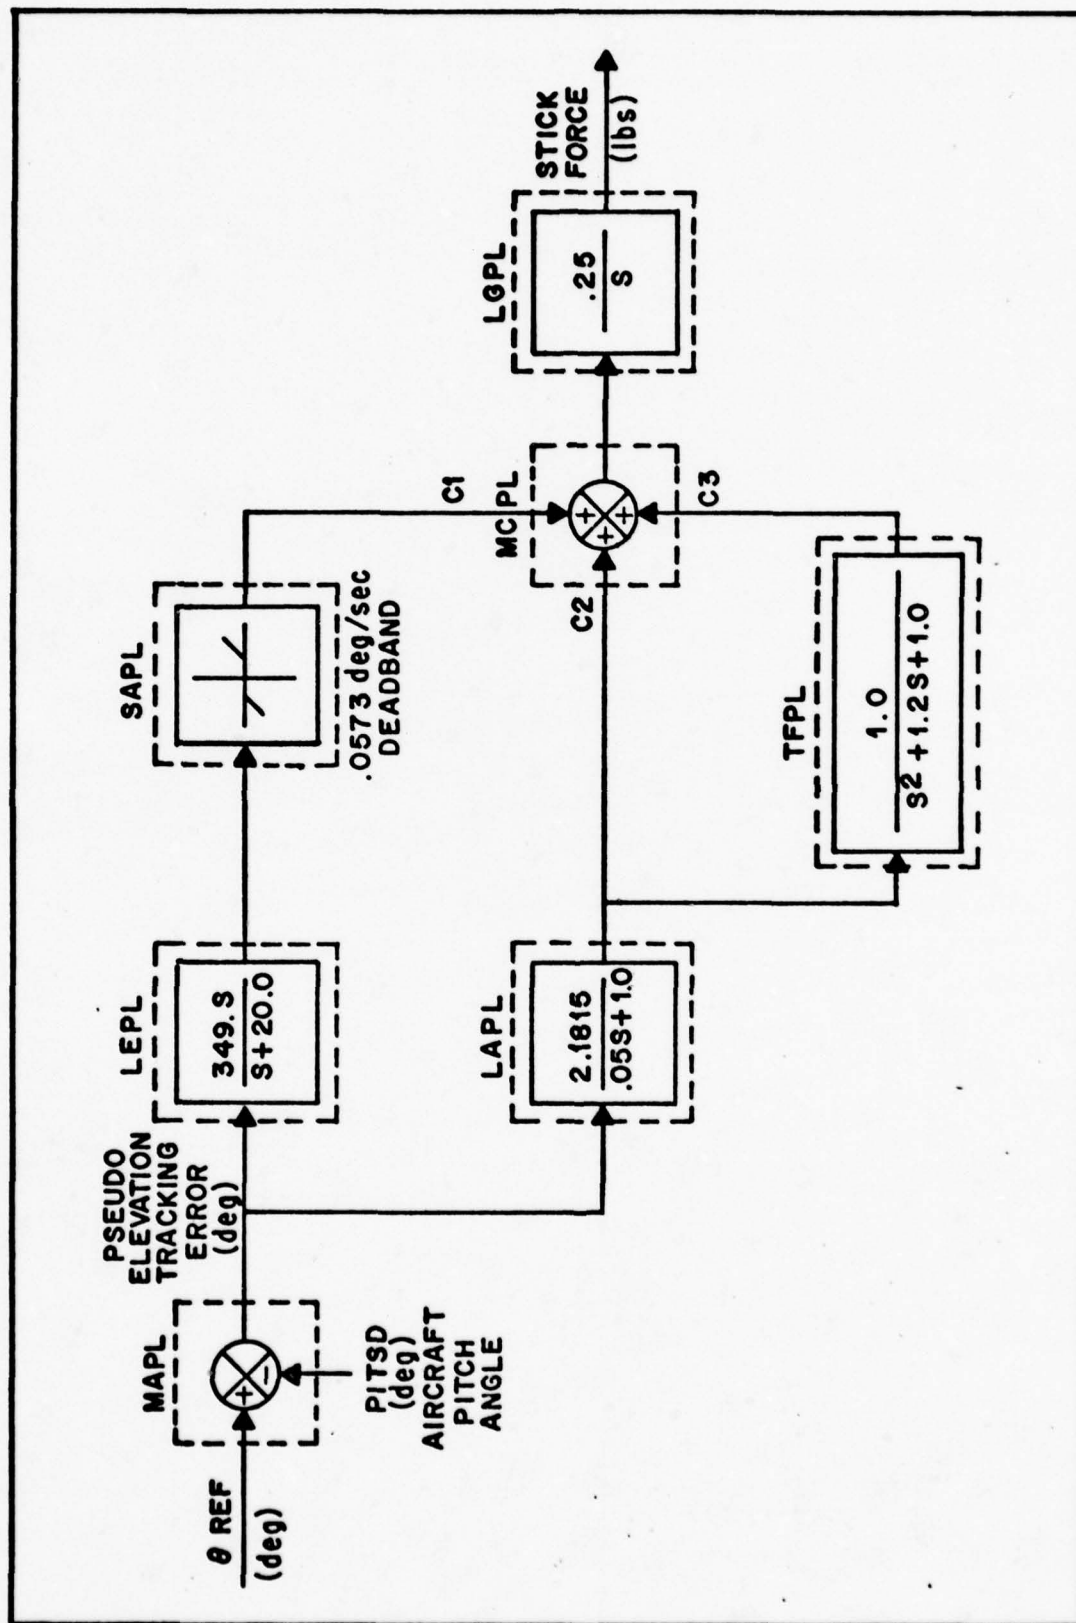
Figure 4. EASY F-16 Longitudinal Pilot Model Schematic

25

it is angular target measure that is observed by the pilot in his target tracking task. Unit measurement changes are also reflected in the diagram of Figure 4.

To complete the requirements of the EASY modelling program, a component block diagram with interconnections was specified. The output of the EASY Modelling Generation program provided a schematic of the overall system indicating input, output, and parameter requirements of the flight control system aircraft model and pilot model. A listing of the model description statements along with a computer generated schematic diagram of the total system modelled is included in Appendix A.

F-16 EASY Analysis

Parameter requirements of the analysis program for the flight control system and pilot model were specified by the input list generated by the model program. This data is in two parts; first, data necessary to generate the table look-up functions of the flight control system; and secondly, parameter values of the standard components. The gain scheduling blocks indicated in Figure 2 were built using the table function components, FU. This tabular data was loaded by describing both the independent and dependent variables. Additional parameters were loaded in the analysis

26

program to specify either linear interpolation or extrapolation of the table look-up functions. Following the tabular data, parameter values were loaded to specify all requirements of the standard components shown in Figure 3 and Figure 4.

Additional data requirements included stability derivative information necessary to satisfy the longitudinal equations of motion. Inconsistencies were found in stability derivative definitions, sign conventions, and unit measurements. It was therefore necessary to develop an axis system and sign convention to be consistent throughout the simulations. The most convenient system was a set of mutually perpendicular reference axes intersecting at the center of gravity of the aircraft. About this point, the aircraft motion, moments and forces were measured. The positive directions for these axes were selected as: forward or opposite the direction of airflow for the X axis; to the right for the Y axis; and downward for the Z axis. Reference data provided by the aircraft manufacturer and the test case from the Griffin program was selected using the stability axes as reference. The stability axes are established with the X axis parallel to the undisturbed airflow with respect to the aircraft body. The axis system selected is described

27

in Figure 5. The sign convention established, although
not universally used, is consistent with both the data
presented by General Dynamics and that of the test case
selected. A graphic description of the sign convention
used is shown in Figure 6 (Ref 11).

Data preparation for the constant coefficient aero
model of the EASY analysis program included external forces,
torques, and aerodynamic stability derivatives. The non-
dimensional stability derivatives were obtained from test
data derived from a test program used by the Air Force
Flight Dynamics Laboratory LAMARS simulation program. Run
#43 of this Griffin program was used as a data base and is
listed in Appendix B. It should be noted that the dynamic
stability derivatives (e.g. functions of control surface
deflections) are listed in per degree units while static
stability derivatives are listed in radian measure. The
non-dimensional derivatives used to satisfy the longitudinal
equations of motion of the EASY program are shown in Table
III along with their respective EASY program names (Ref 6).

F-16 Aircraft Model Validation

With the tabular data, parameter values, and stability
derivative requirements satisfied, the EASY analysis program
was used to verify the aircraft dynamics. The first check
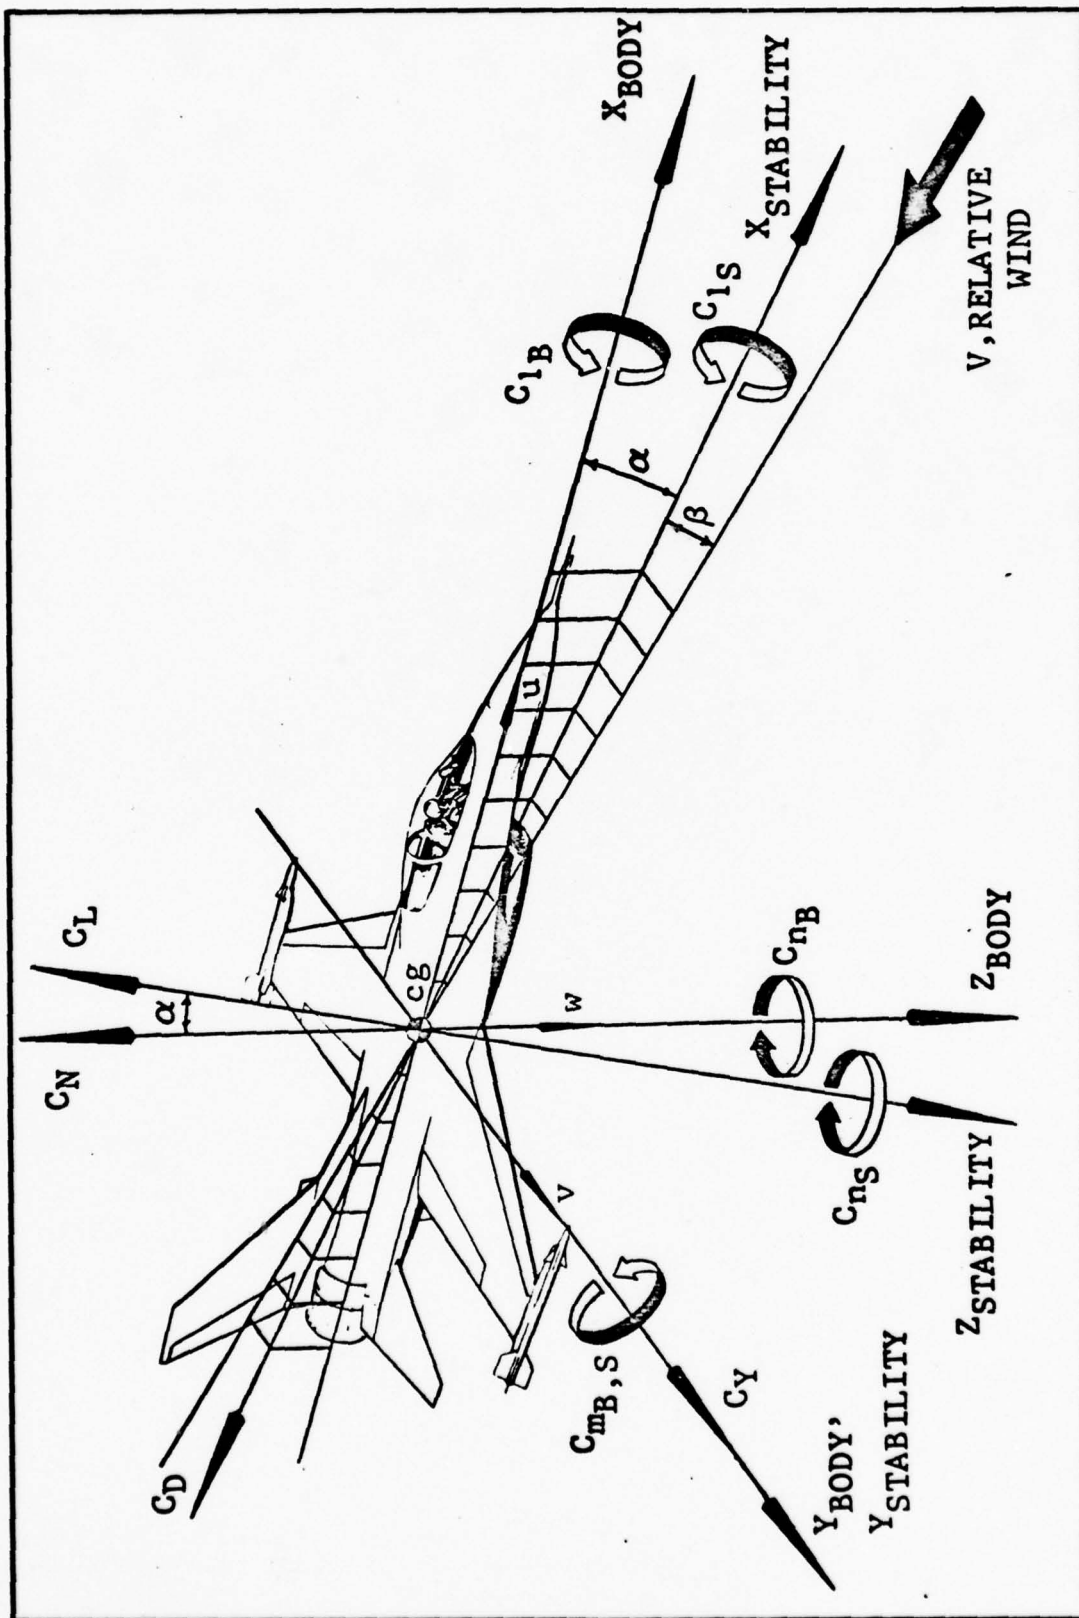
Figure 5. Axes System Diagram (Ref 11)

29
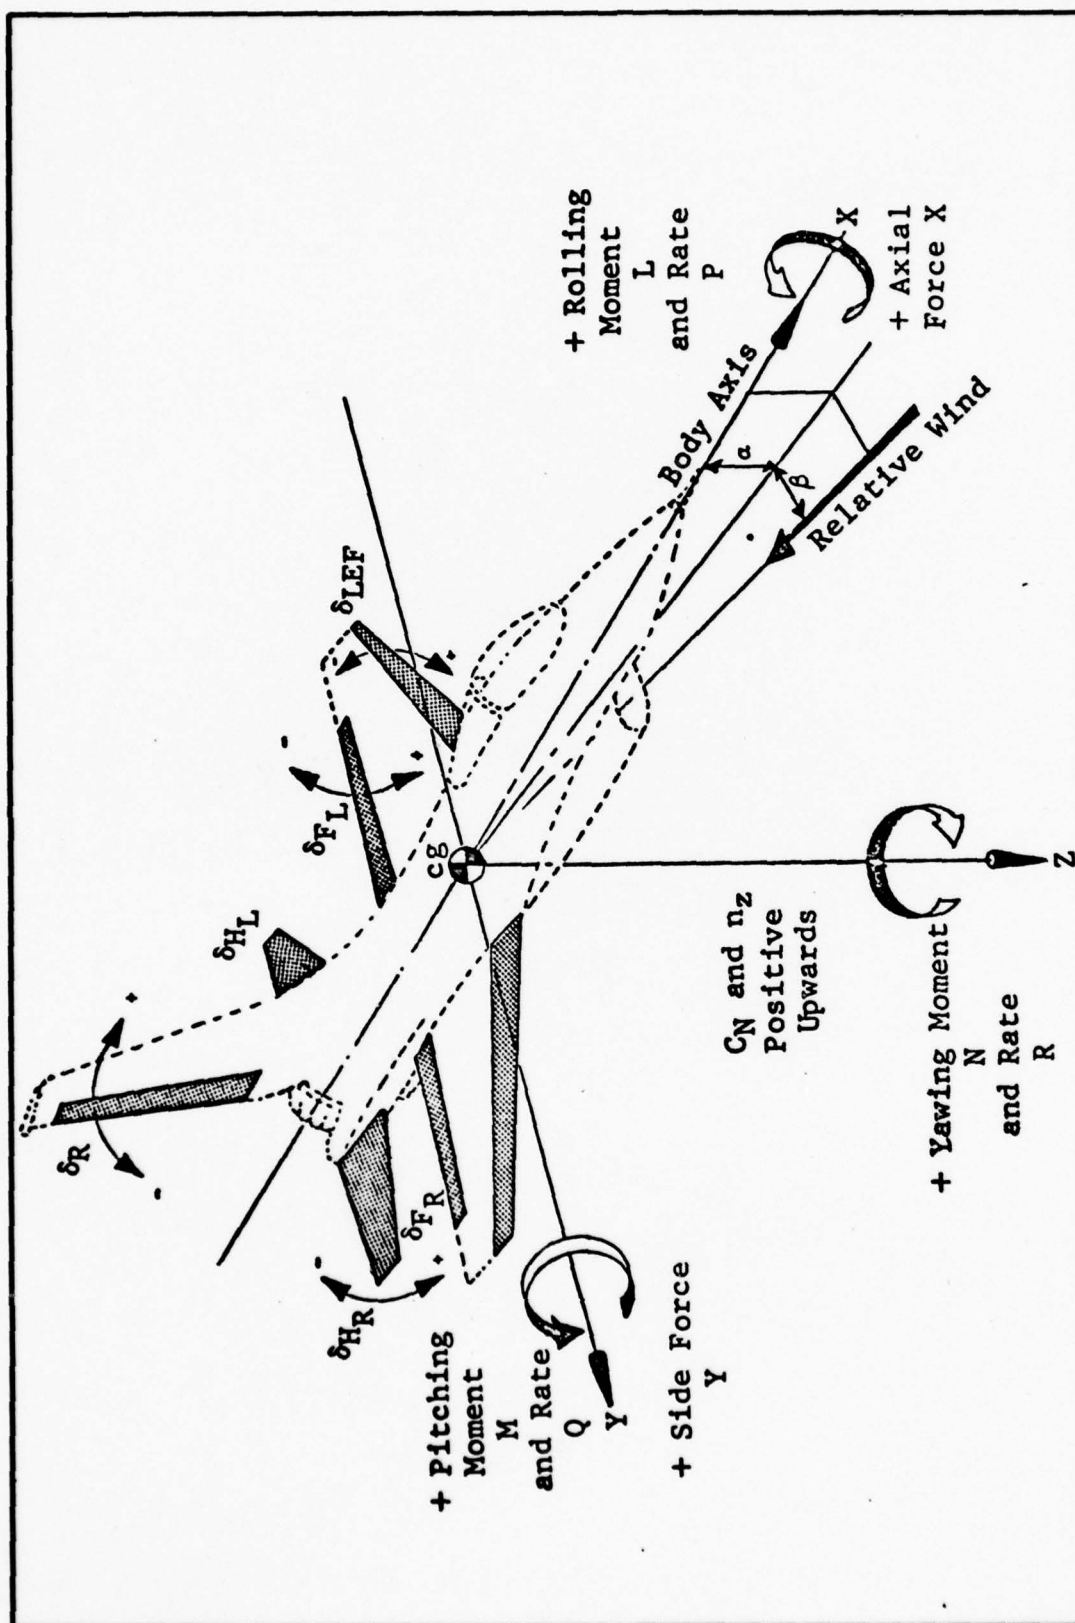
Figure 6. Simulation Sign Convention Diagram (Ref 11)

30

Drag Coefficient	Definition	Value	EASY Parameter Name
$-C_{D_o}$	$\dfrac{-D}{qS}$	$-.0250$	XO LO
$-C_{D_\alpha}$	$\dfrac{-\partial C_D}{\partial \alpha}$	$-.1644$	XA LO
$-C_{D_u}$	$\dfrac{-M}{2} C_{D_M}$	$-.0746$	XU LO
$-C_{D_{\delta_e}}$	$\dfrac{-\partial C_D}{\partial \delta_e}$	$+.0525$	XDELO
Lift Coefficient			
$-C_{L_o}$	$\dfrac{-L}{qS}$	$-.1443$	ZO LO
$-C_{L_\alpha}$	$\dfrac{-\partial C_L}{\partial \alpha}$	-4.8159	ZA LO
$-C_{L_{\dot\alpha}}$	$\dfrac{-\partial C_L}{\partial \dot\alpha}$	$+.6600$	ZADLO
$-C_{L_q}$	$\dfrac{-\partial C_L}{\partial \left(\frac{q\bar{c}}{2U_o}\right)}$	-2.5965	ZQ LO

31

Table III
(Continued)

Lift Coefficient	Definition	Value	EASY Parameter Name
$-C_{L_u}$	$\dfrac{-M}{2} C_{L_M}$	$-\ .0607$	ZU LO
$-C_{L_{\delta_e}}$	$\dfrac{-\partial C_L}{\partial \delta_e}$	$-\ .4986$	ZDELO

Pitching Moment Coefficient	Definition	Value	EASY Parameter Name
C_{m_o}	-	$-\ .0182$	MO LO
C_{m_α}	$\dfrac{\partial C_m}{\partial \alpha}$	$+\ .0943$	MALLO
$C_{m_{\dot{\alpha}}}$	$\dfrac{\partial C_m}{\partial \dot{\alpha}}$	$-\ .9550$	MADLO
C_{m_q}	$\dfrac{\partial C_m}{\partial \left(\frac{q\bar{c}}{2U_o}\right)}$	-2.3187	MQ LO
C_{m_u}	$\dfrac{M}{2} C_{m_M}$	$-\ .0145$	MU LO
$C_{m_{\delta_e}}$	$\dfrac{\partial C_m}{\partial \delta_e}$	$-\ .6669$	MDELO

of the system was to trim the aircraft in straight and level flight at an altitude of 20,000 feet and airspeed of .8 Mach, or an equivalent 829.5 feet per second. In order to trim the aircraft, two additional integrators were added to the system model. The input of the first trim integrator was the difference in reference altitude of 20,000 feet and the actual calculated altitude of the SD component during the trim iterations. This difference error was then integrated and the output fed into the system as a stick input to help achieve a steady state at 20,000 feet. This trim integrator is shown in the upper left hand corner of Figure 3. Likewise, a second trim integrator was used to compare actual velocity calculated in the SD component to the reference velocity of 829.5 feet per second. This velocity difference was integrated and the error was used to help achieve the desired trim condition.

Through the use of program commands, a steady state system solution was determined. Following trim iterations of the EASY program, the computer output shown in Figures 7 and 8 verify the aircraft trim condition. The system states, as defined by the EASY program, are those quantities described by first order differential equations. As shown in Figure 7, the system modelled consists of 25 states. The

33

STEADY STATE ANALYSIS

A MAXIMUM OF 30 ITERATIONS CAN BE USED

STATES

RATES

VARIABLES

Figure 7. EASY Program Steady State Output
(States, Rates, & Variables)

Figure 8. EASY Program Steady State Output
(Parameters)

value of each state is given for the trim condition. Output variables are shown that correspond to the component outputs of Figure 3, p. 21. The parameter values for each standard component are listed in Figure 8. To achieve the desired trim condition, the pilot model was isolated from the aircraft and flight control models. Program commands were then used to generate steady state iterations. In doing this, the dynamic equations of motion were perturbed after each iteration step until the trim condition specified by altitude and airspeed initial conditions was achieved. The state variables indicate the quantities that result from integrating the set of first order differential equations that comprise the dynamic system model.

Once that an operating point was established, all initial conditions of integrator states were transferred to the system through a program command. With the two additional trim integrators for altitude and airspeed turned off (i.e. integrator states "frozen") verification of the F-16 aircraft characteristics continued.

The model developed by the EASY program which includes the F-16 aircraft characteristics, longitudinal flight control system, and longitudinal pilot model, is described by the simplified block diagram of Figure 9.
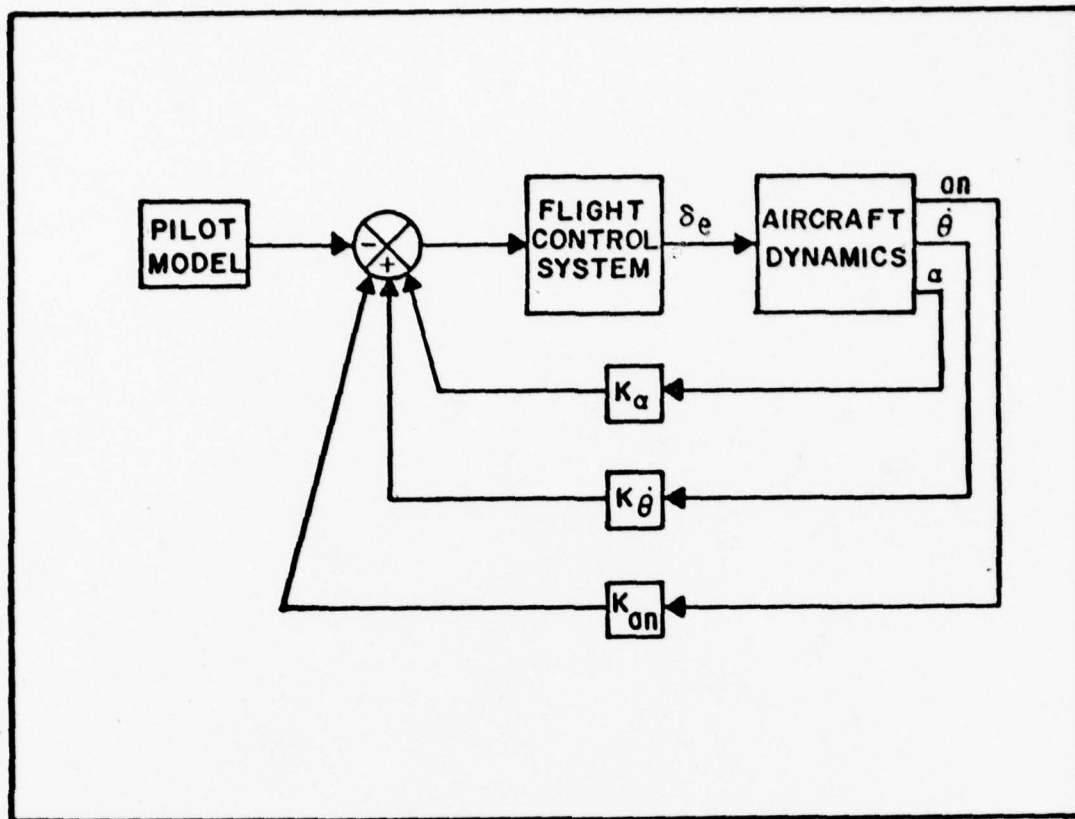
Figure 9.   EASY Model Simplified Diagram

By selecting summing junction parameters to open all
flight control system feedback loops and freezing integra-
tors in the pilot model and flight control system, transfer
functions of the aerodynamic variables for elevator deflec-
tion could be obtained. With the above provisions completed
through program commands, the total system was effectively
reduced to the aircraft dynamic model shown in the simpli-
fied diagram of Figure 10. The basic aircraft dynamics of
the Griffin program were compared with EASY Analysis program
calculations. A comparison of the computer generated
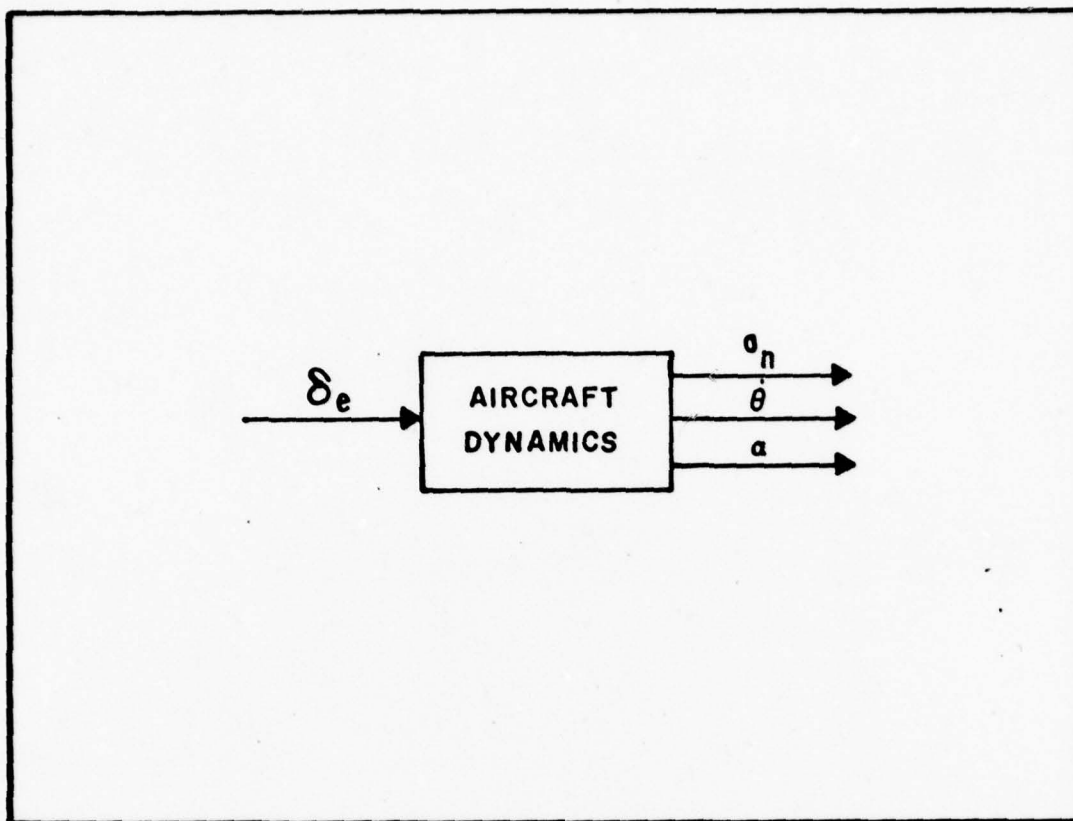
Figure 10. EASY Transfer Function Diagram

characteristic equation roots with the Griffin program data

is listed in Table IV.

Table IV
Roots of the F-16 Characteristic Equation
(Longitudinal Dynamics)

	Griffin Data	Easy Analysis Data
Short Period	+.8282 -2.745	+.8168 -2.746
Phugoid	-.0262 + j.1528 -.0262 - j.1528	-.0288 + j.1245 -.0288 - j.1245

At the flight condition selected for this simulation, flight data indicates that the basic F-16 airframe is unstable. The relaxed static stability is demonstrated by the real positive eigenvalue. As shown above, the short period mode of the F-16 aircraft has two real roots. One of these in the right half plane brings about the airframe instability. The phugoid mode is indicated by the pair of dominant complex poles near the origin.

Although the numerator characteristics were calculated in the EASY Analysis program, it was not possible to have these printed to enable a comparison with the numerator dynamics of the Griffin program. However, transfer functions were calculated using the EASY program commands and the computer generated Bode diagrams were used to validate the numerator dynamics. From the Griffin program data, the following analytical transfer functions of angle of attack per elevator deflection and pitch rate per elevator deflection were derived:

$$\frac{\alpha}{\delta_e} = \frac{-.1329(s + 148.5)(s^2 + .0177s + .0040)}{(s - .8282)(s + 2.745)(s^2 + .0524s + .0240)} \qquad (3)$$

$$\frac{\dot{\theta}}{\delta_e} = \frac{-19.72s(s + .01741)(s + 1.312)}{(s - .8282)(s + 2.745)(s^2 + .0524s + .0240)} \qquad (4)$$

39

The AFIT frequency response program (FREQR) was used to generate plots of the above transfer functions. Figure 11 shows the angle of attack per elevator deflection transfer function of the Griffin program data. This compares very favorably with the computer generated EASY magnitude and phase plots of alpha per delta elevator shown in Figures 12 and 13, respectively. A similar comparison of the pitch rate per delta elevator transfer functions was made and the results are shown in Figures 14-16. The above comparisons clearly serve to substantiate the validation of the F-16 aircraft model developed.

As mentioned earlier, the F-16 basic aircraft is unstable at the flight condition selected for this simulation. This instability is evidence of a positive static margin which is defined as the ratio of C_{m_α} to C_{L_α}. The instability of the basic F-16 airframe was demonstrated by using the simulation program commands of the EASY Analysis program. With all integrator states in the flight control system frozen and also insuring that all feedback channels of the flight control system were opened, a time simulation was run to show the dynamics of the aircraft alone with no flight control system. An initial condition equivalent to a

Figure 11. Alpha/Delta Elevator Transfer Function of the Griffin Program Data

41
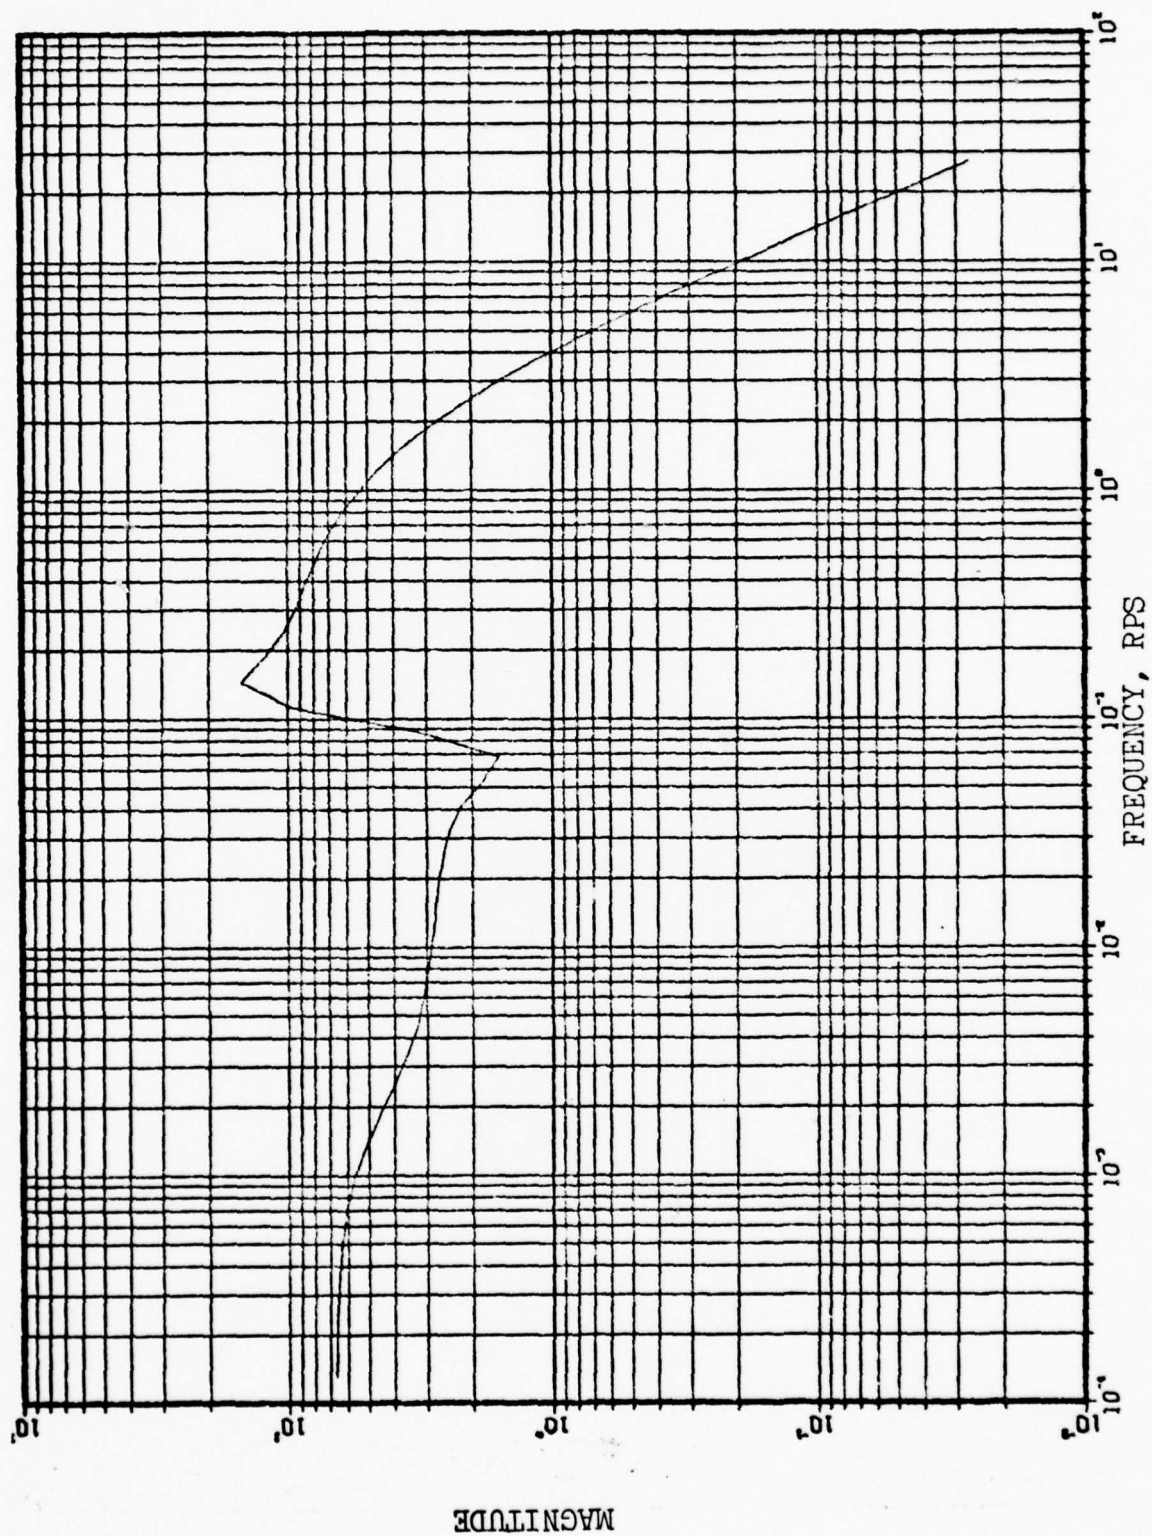
Figure 12. EASY Generated Magnitude Plot of Alpha/Delta Elevator Transfer Function

42

FREQUENCY, RPS

PHASE ANGLE, DEGREES
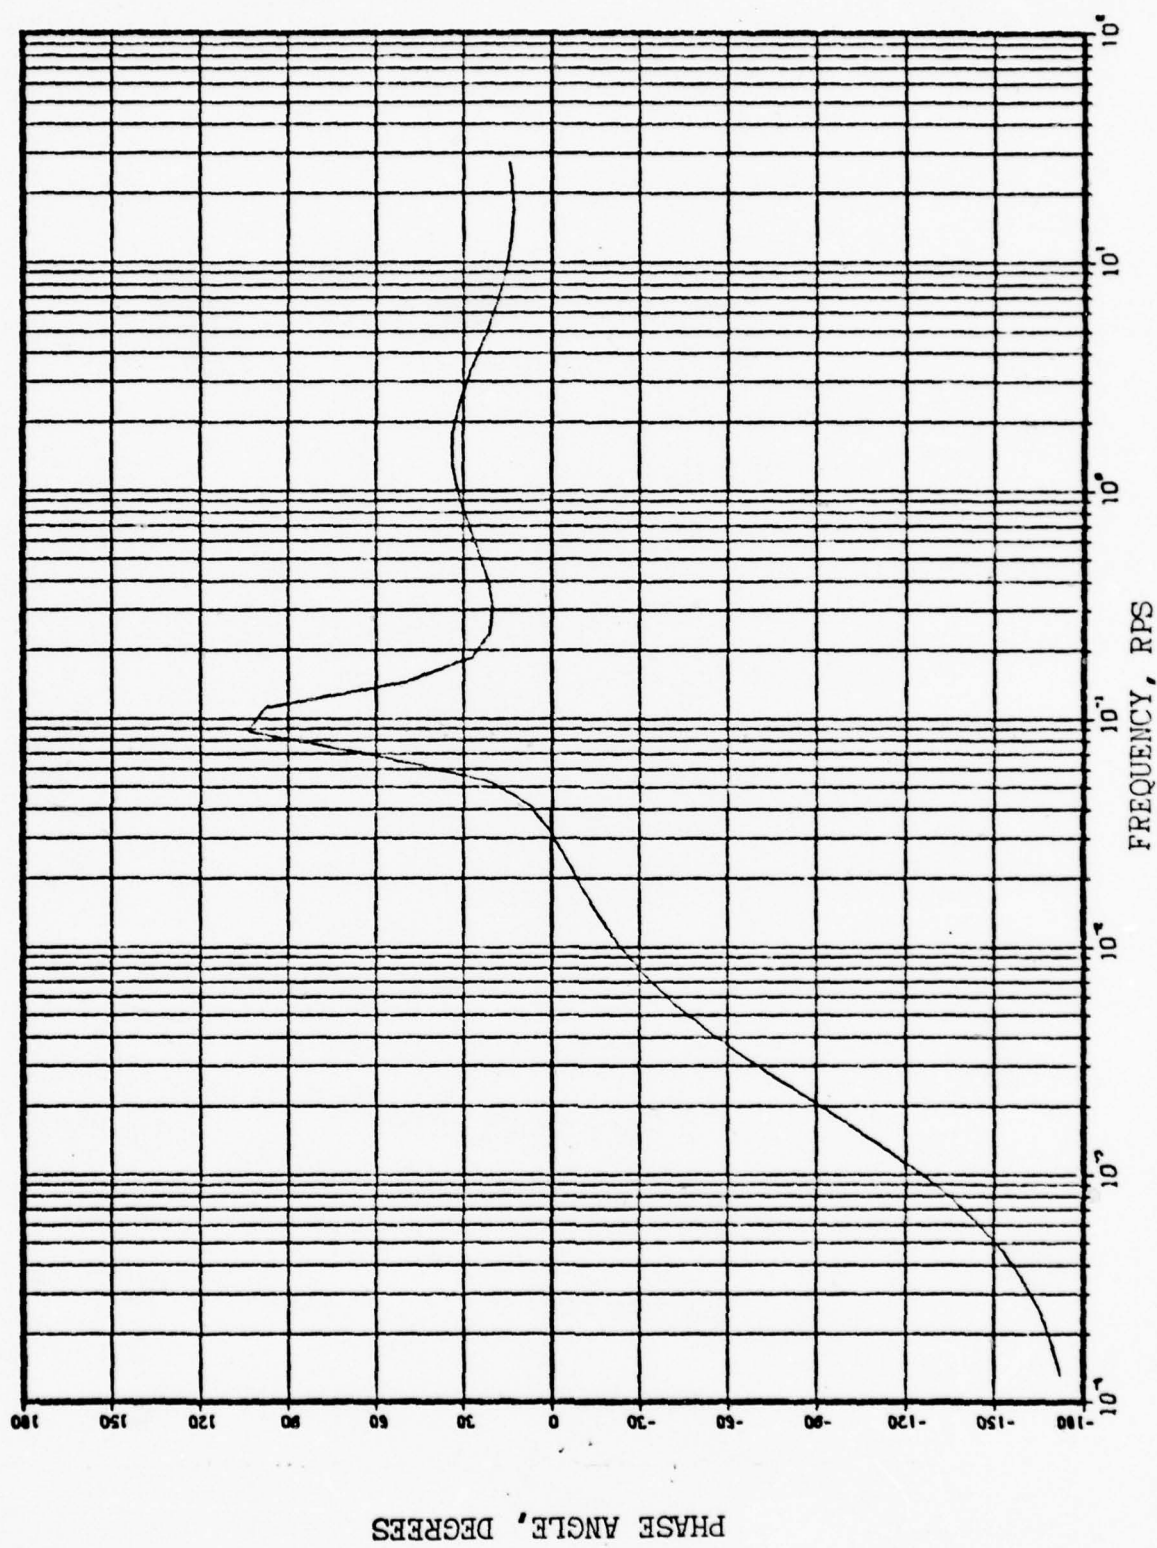
Figure 13.   EASY Generated Phase Plot of Alpha/Delta Elevator Transfer Function

43
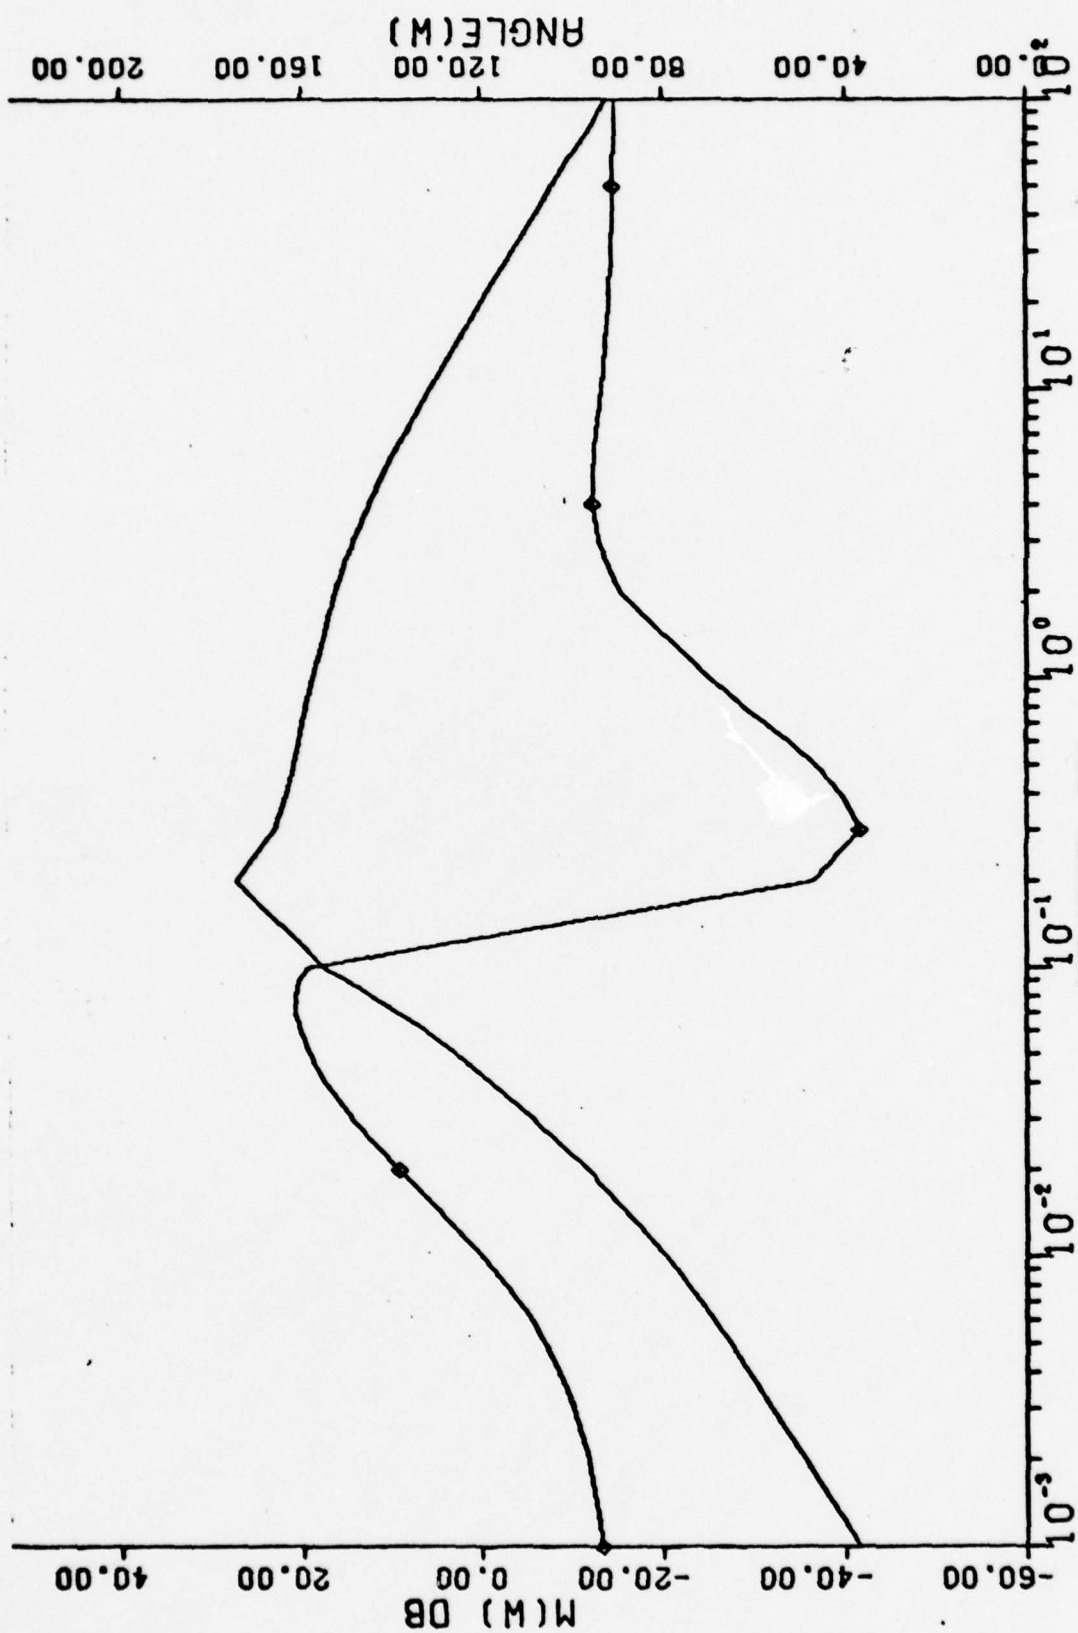
Figure 14. Pitch Rate/Delta Elevator Transfer Function of the Griffin Program Data

44
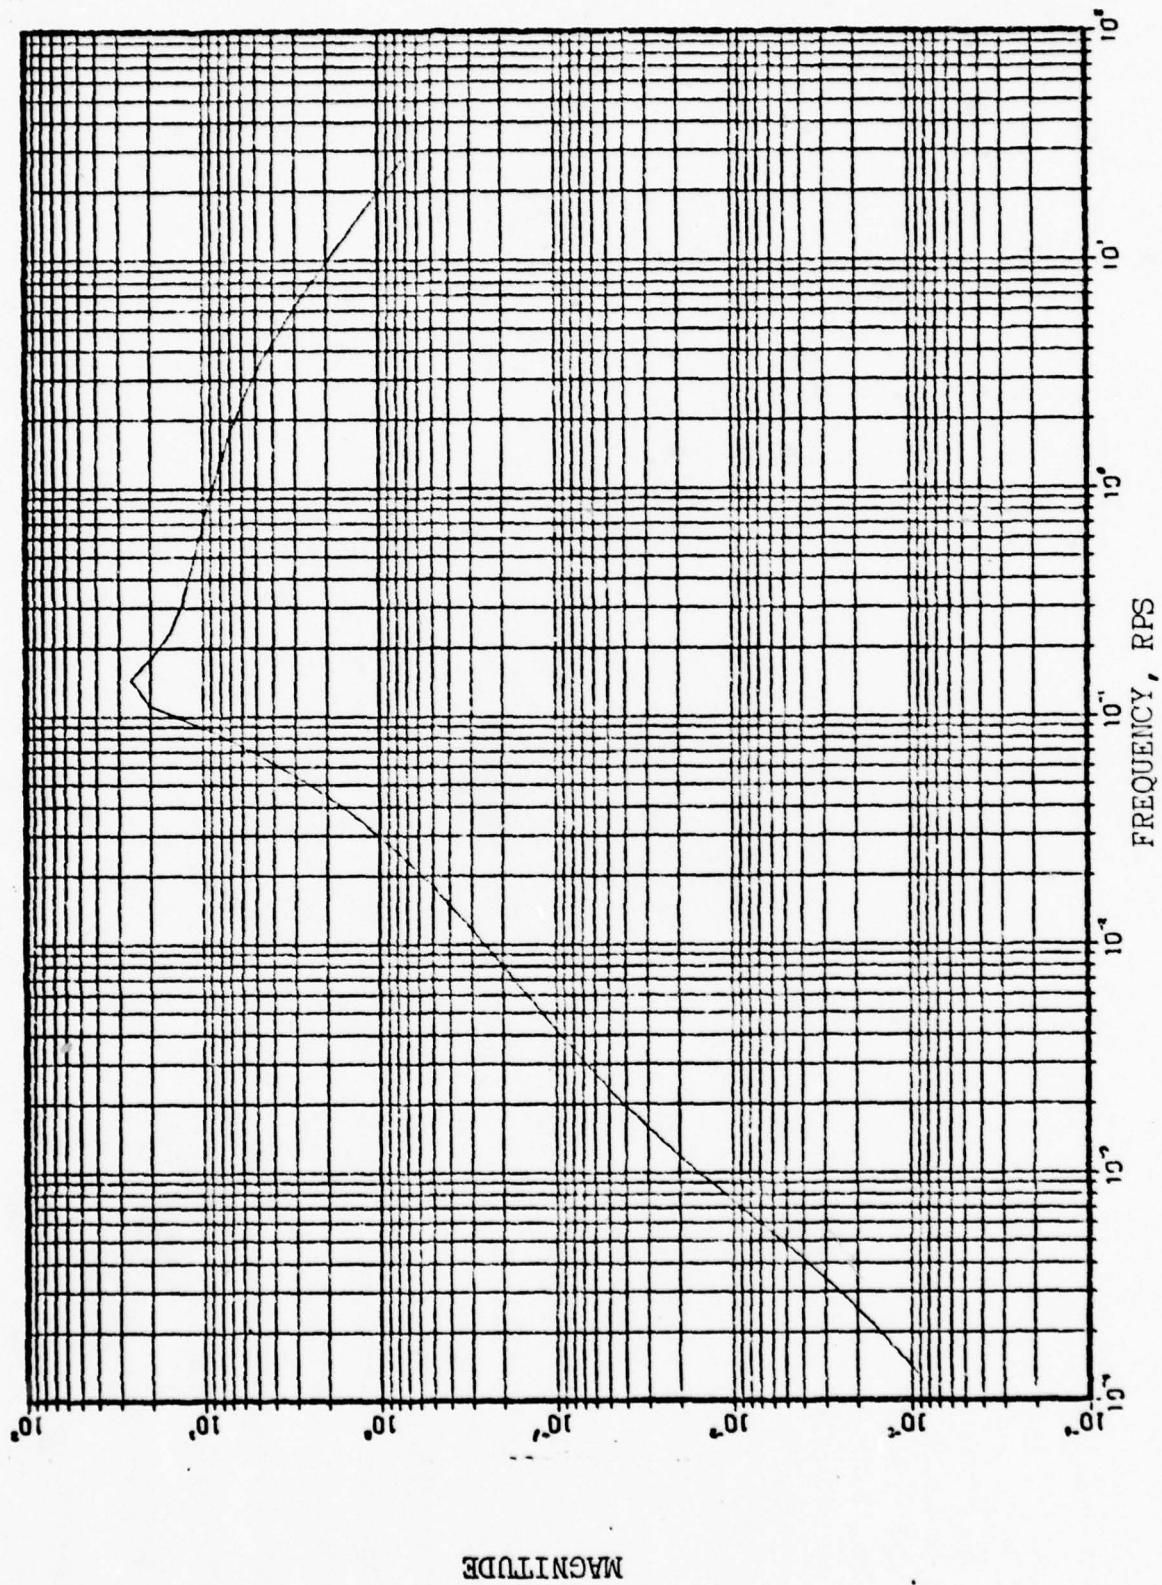
Figure 15. EASY Generated Magnitude Plot of Pitch Rate/Delta Elevator Transfer Function

45
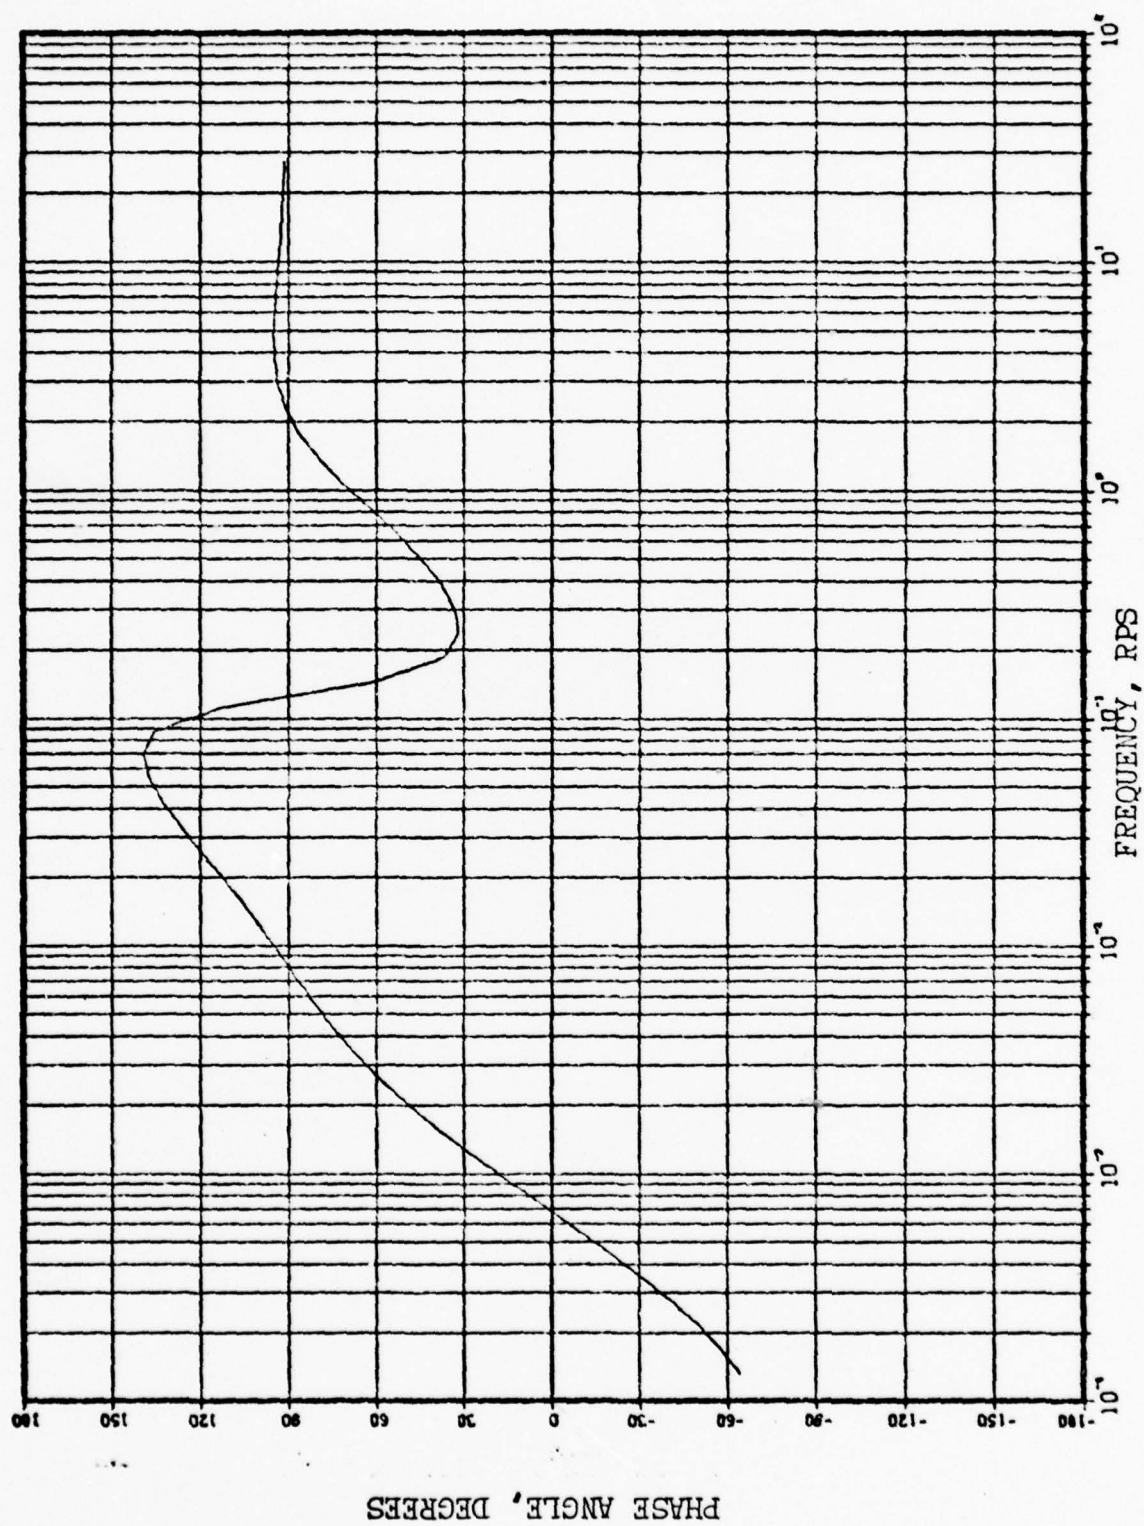
Figure 16. EASY Generated Phase Plot of Pitch Rate/Delta Elevator Transfer Function

46

one degree angle of attack pertubation was input into the aircraft system and the resulting dynamic response is shown in Figure 17. It can be seen that the aircraft does not return to its equilibrium trim condition with even a slight angle of attack pertubation. The display shows the angle of attack, pitch angle, and altitude increasing while the aircraft airspeed decreases. This demonstrates the necessity of maintaining the flight control system to harness the inherent aerodynamic instability.

EASY System Analysis

The EASY Analysis program was further used to examine the present F-16 flight control system. Investigations continued to establish a measure of the system effectiveness. The present F-16 flight control system, which is predominantly normal acceleration feedback, was evaluated in terms of tracking performance. As shown in Figure 18, a closed loop system was established by having the pilot model respond to an angular error input. The command angle was the difference between the aircraft pitch angle and a prescribed reference angle. By establishing this pseudo tracking task, a first order approximation of the director sight implementation was achieved. The pilot model parameters were selected to be consistent with the director sight characteristics.

47
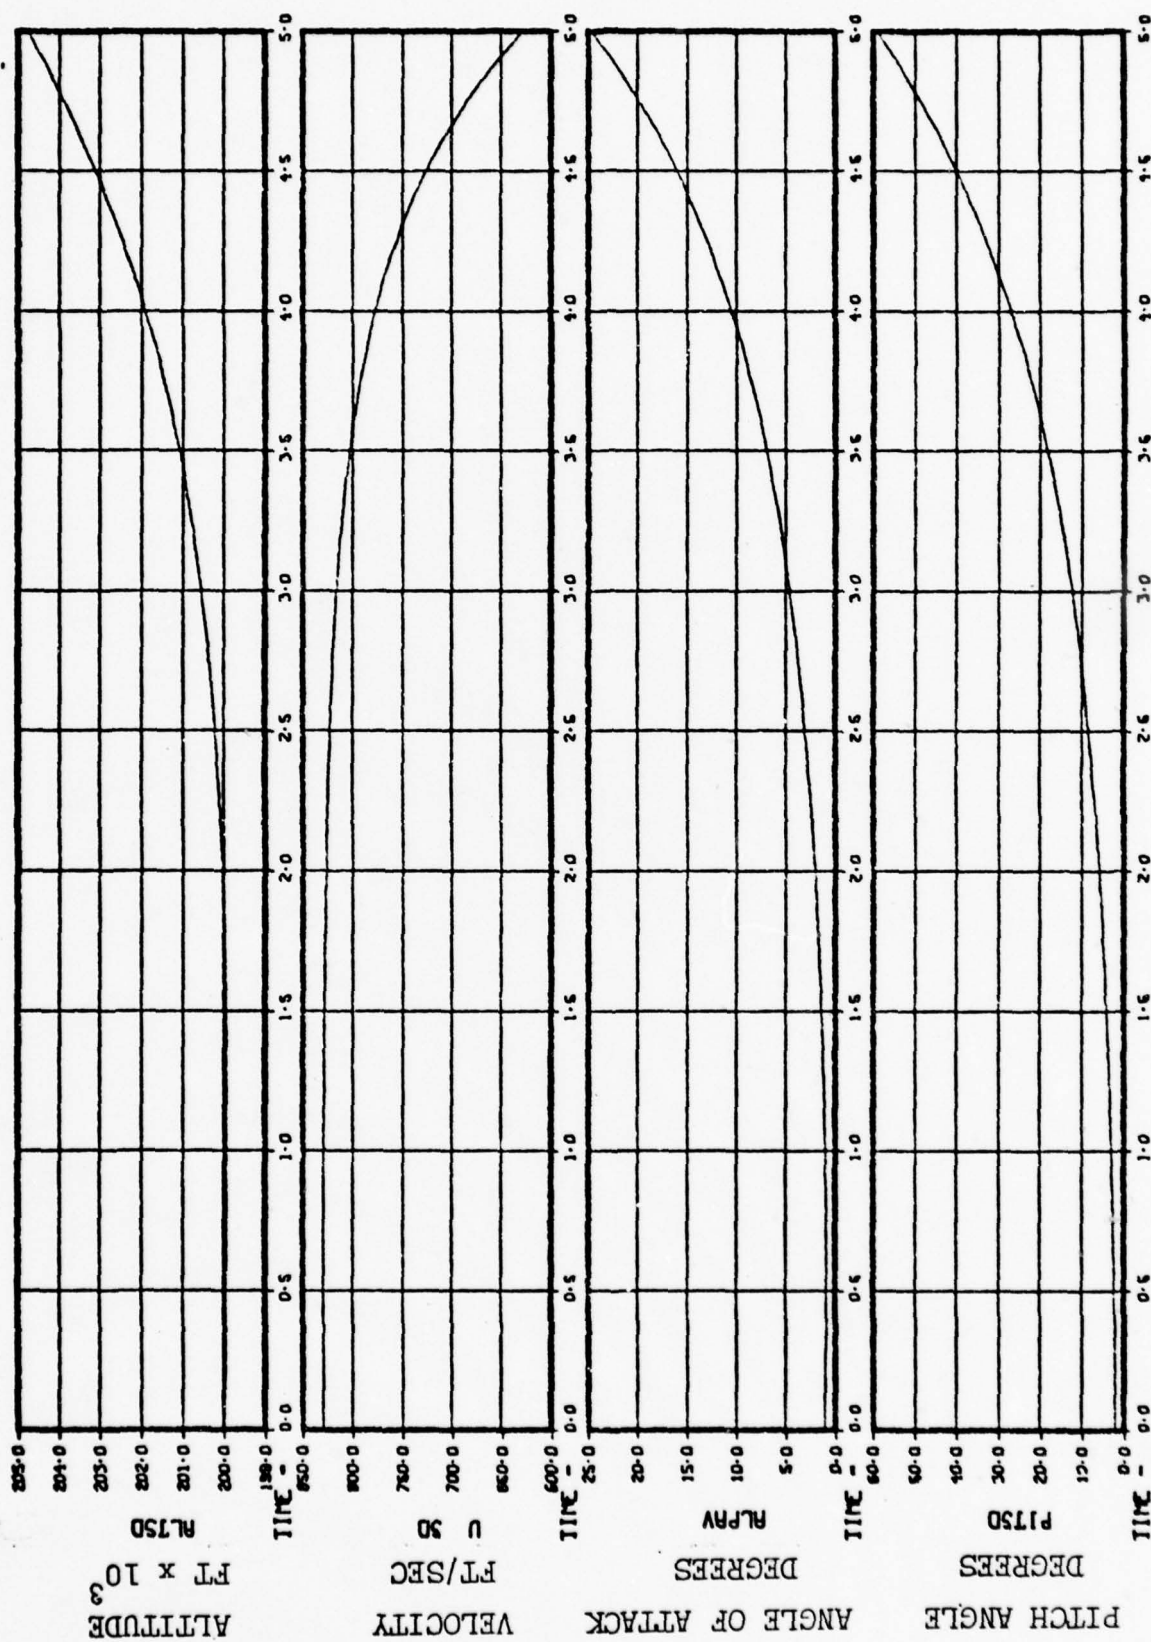
Figure 17. F-16 Aircraft Response to 1° Angle-of-Attack Pertubation

48
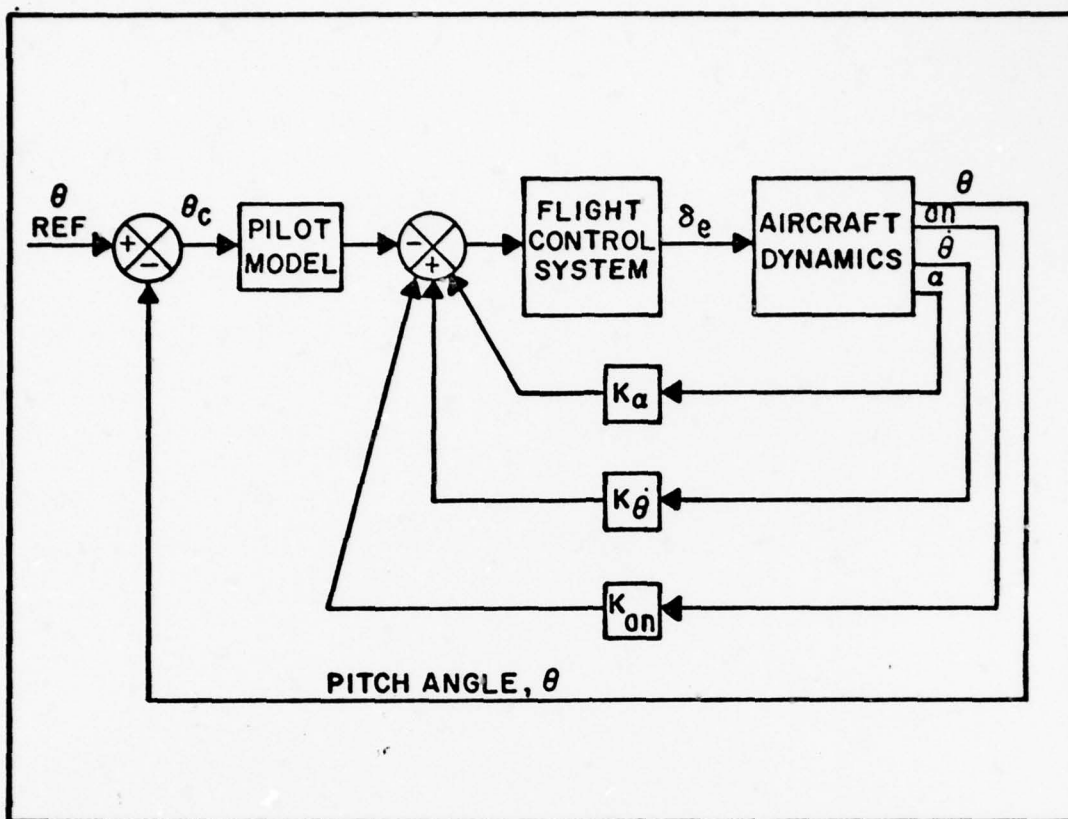
Figure 18. EASY Closed Loop System Schematic Diagram

Control of the pitch feedback summing junction of Figure 18 was gained through EASY program commands and by selecting the appropriate parameter, the θ/θ_{REF} transfer function was established for either closed or open loop analysis.

The magnitude and phase Bode plots of the normal acceleration configuration for the closed loop are shown in Figures 19 and 20, respectively. The magnitude plot indicates the transfer function is well behaved and the maximum peak, M_m, of 1.43 occurs at a frequency of .356 radians per second. As seen in Figure 19, the system bandwidth is
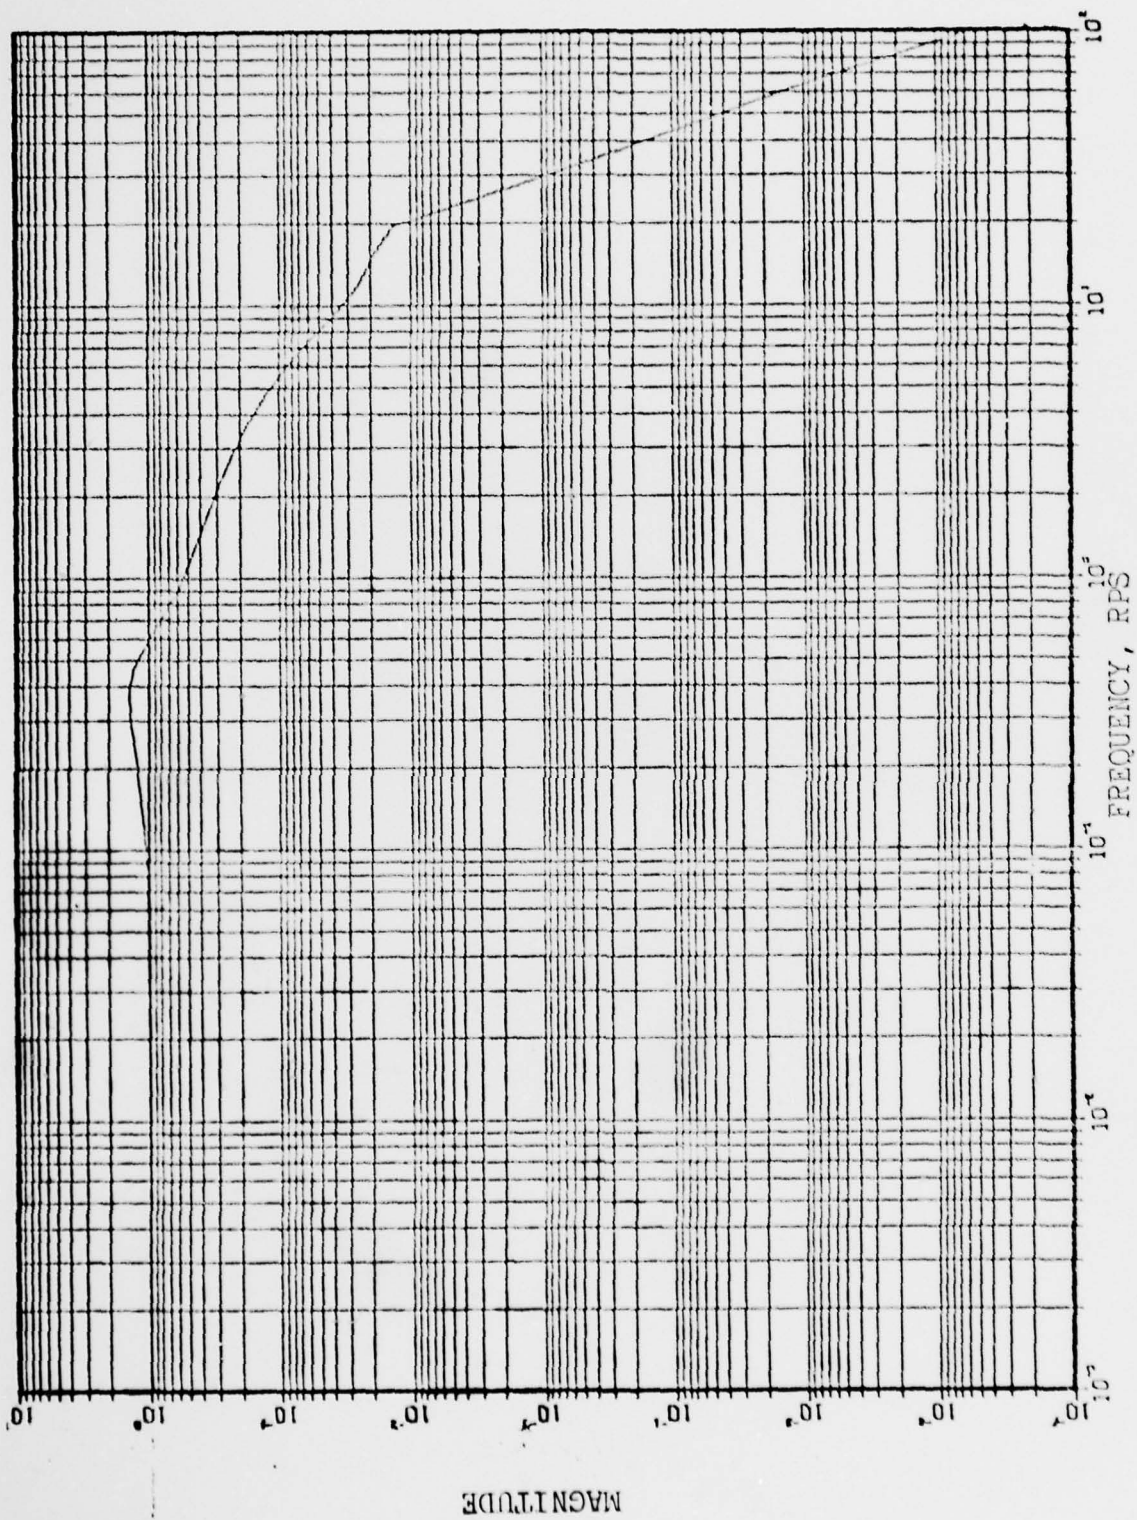
Figure 19. Normal Acceleration Configuration Closed Loop Bode Magnitude Plot
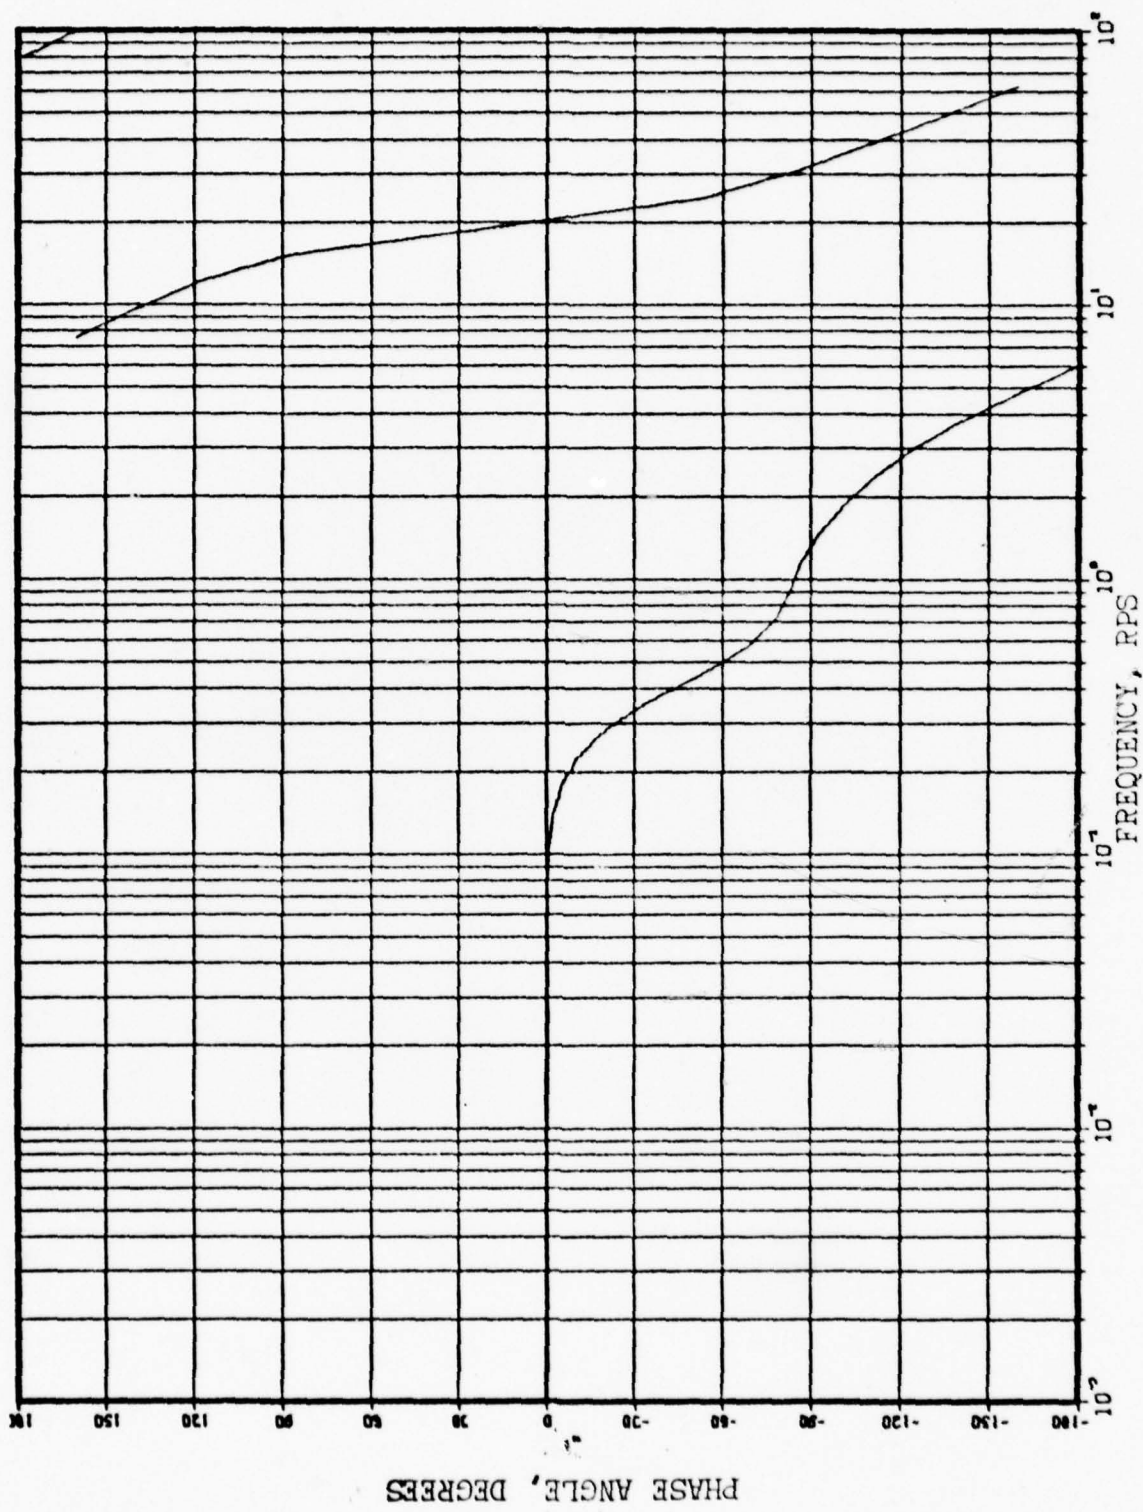
Figure 20. Normal Acceleration Configuration Closed Loop Bode Phase Plot

51

approximately .7 radians per second. Next the open loop transfer function was investigated by opening the feedback loop at the summing junction. The Bode plots of the open loop normal acceleration transfer function are shown in Figures 21 and 22. As seen in Figure 21, the gain cross-over occurs at approximately .5 radians per second and the phase margin (Figure 22) is 52 degrees. To evaluate the effectiveness of the pseudo tracking task of the pilot model, a time simulation was run to show the system response to a step input of 5.5 degrees pitch. The time response to this step input is shown in Figure 23.

The EASY Analysis program was also used to investigate the merits of a pitch rate command system. As discussed in Chapter I, the C* design concept for the F-16 flight control system employs a predominantly normal acceleration command system at cruise airspeeds. This is evidenced by the larger weighting of normal acceleration to pitch rate in the feed-back channels of the longitudinal control system. For air combat tracking tasks, pitch rate feedback could be made predominant by adjusting this weighting relationship. One possible implementation would be the total weighting of pitch rate as the command signal with the elimination of normal acceleration feedback.

FREQUENCY, RPS
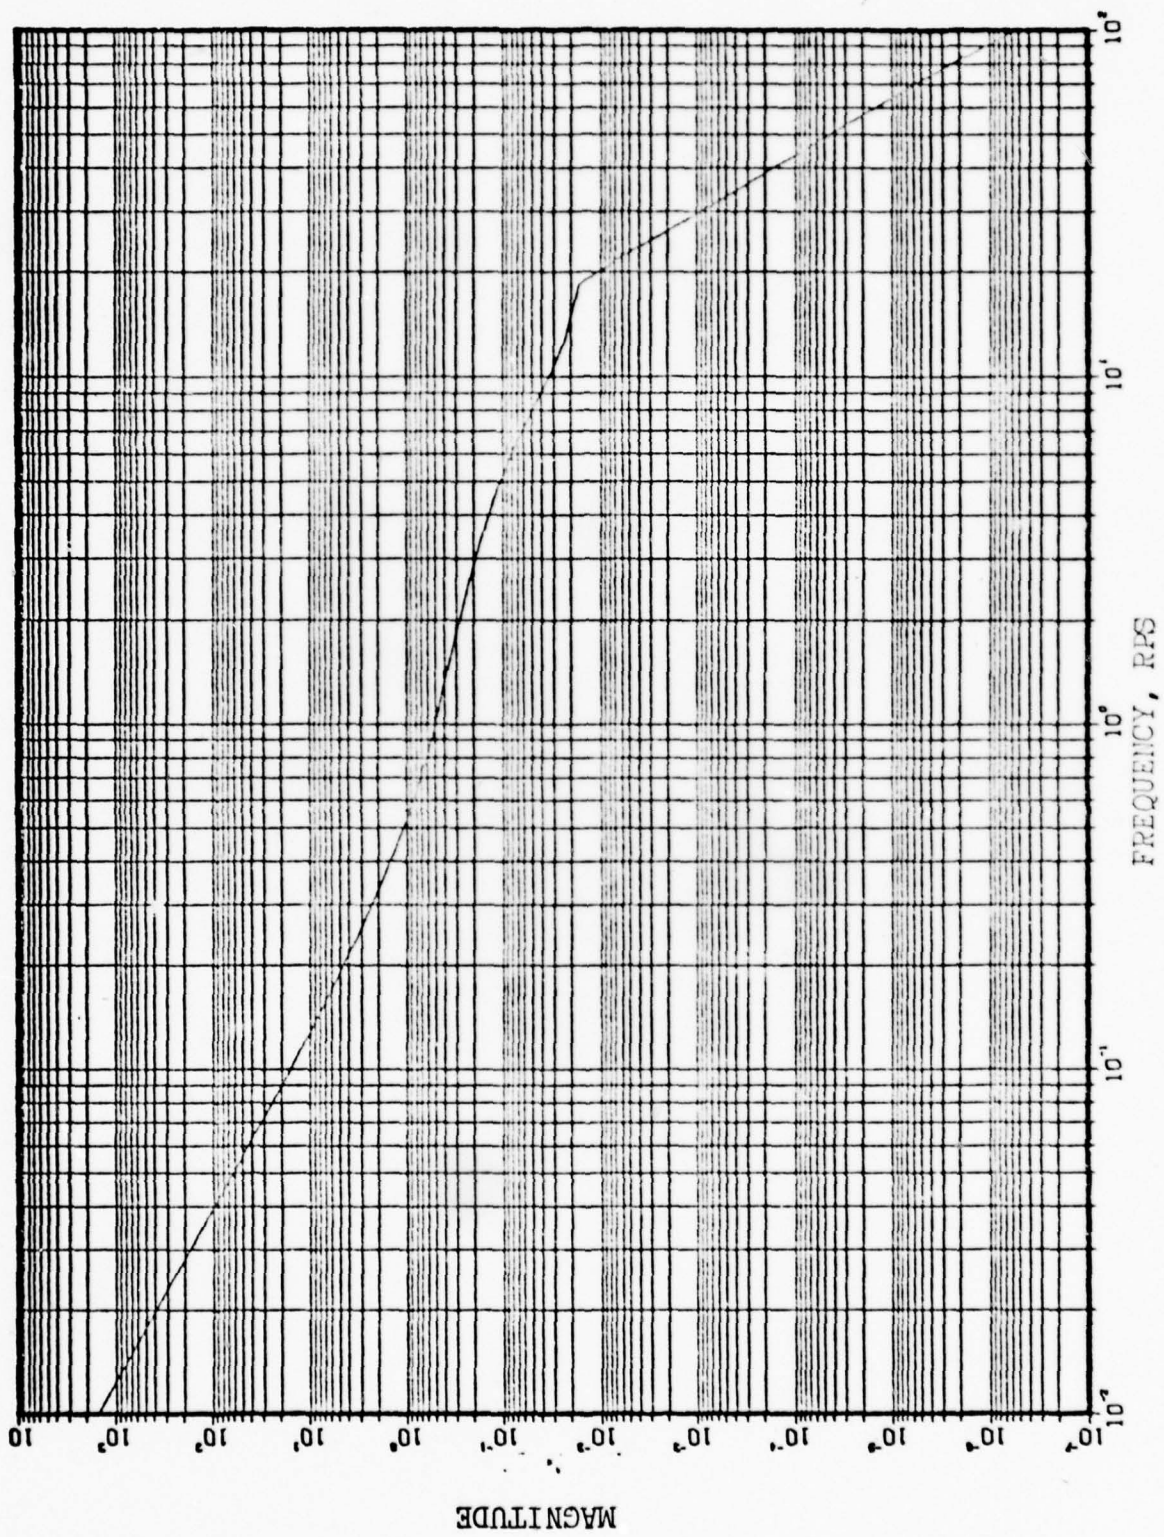
MAGNITUDE

Figure 21. Normal Acceleration Configuration Open Loop Bode Magnitude Plot

53
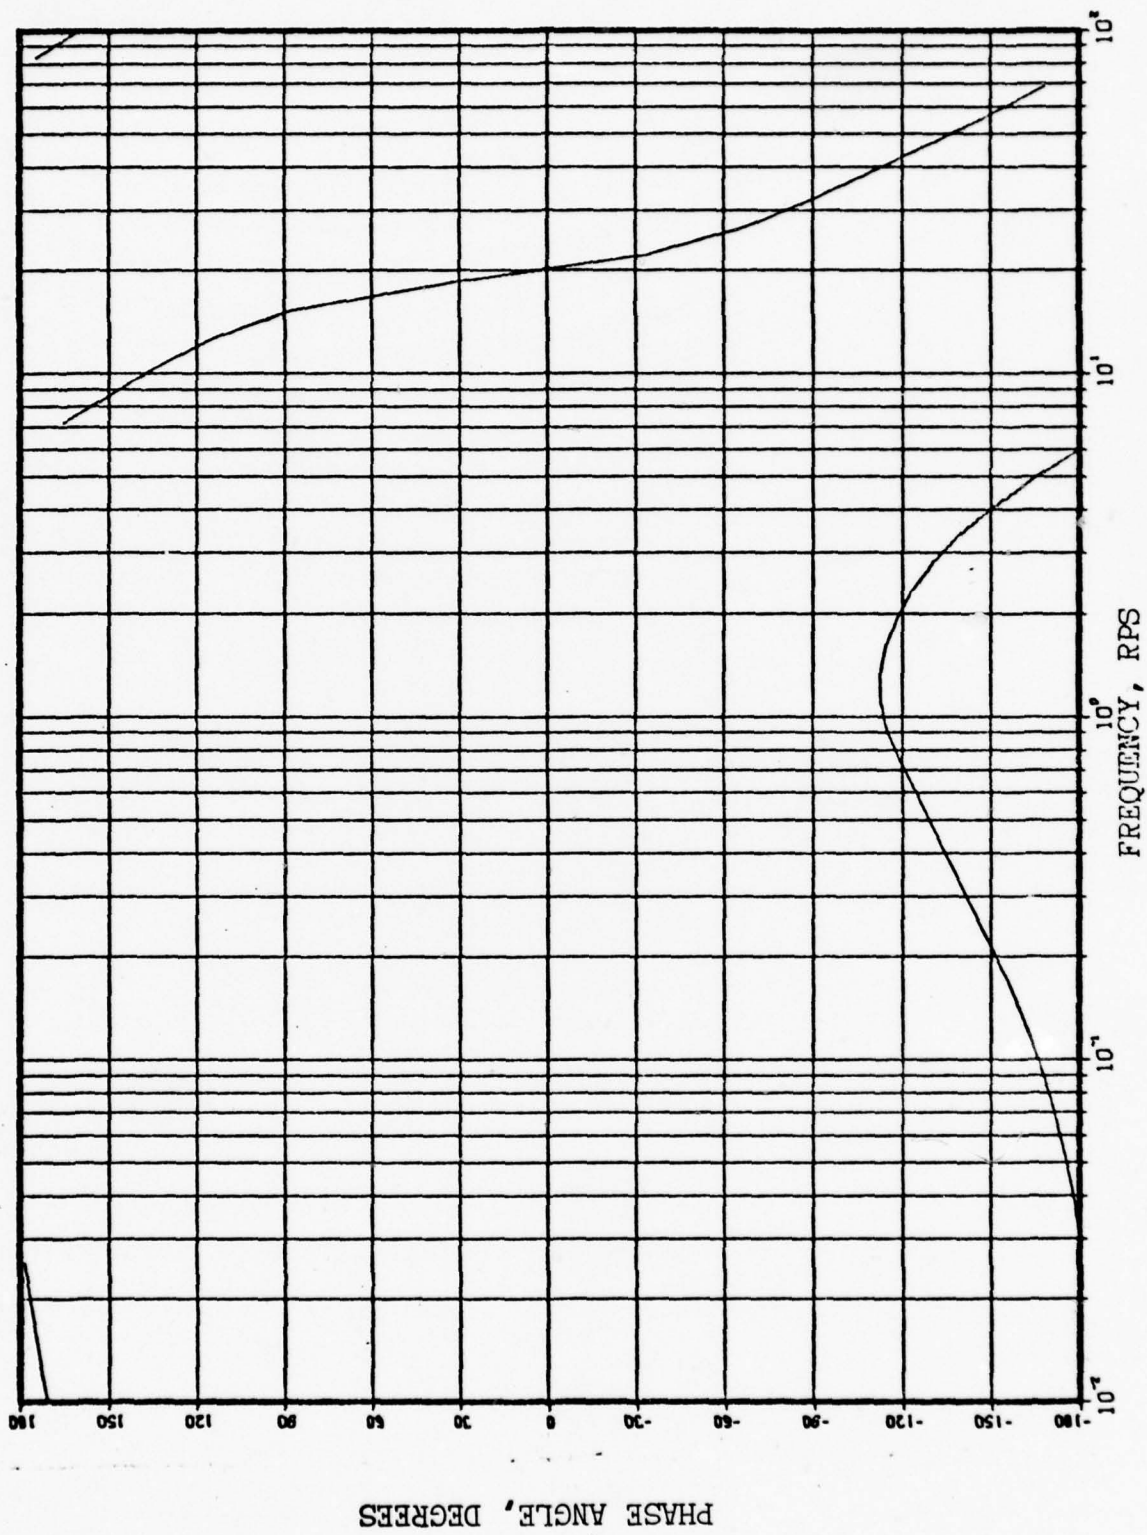
Figure 22. Normal Acceleration Configuration Open Loop Bode Phase Plot

54
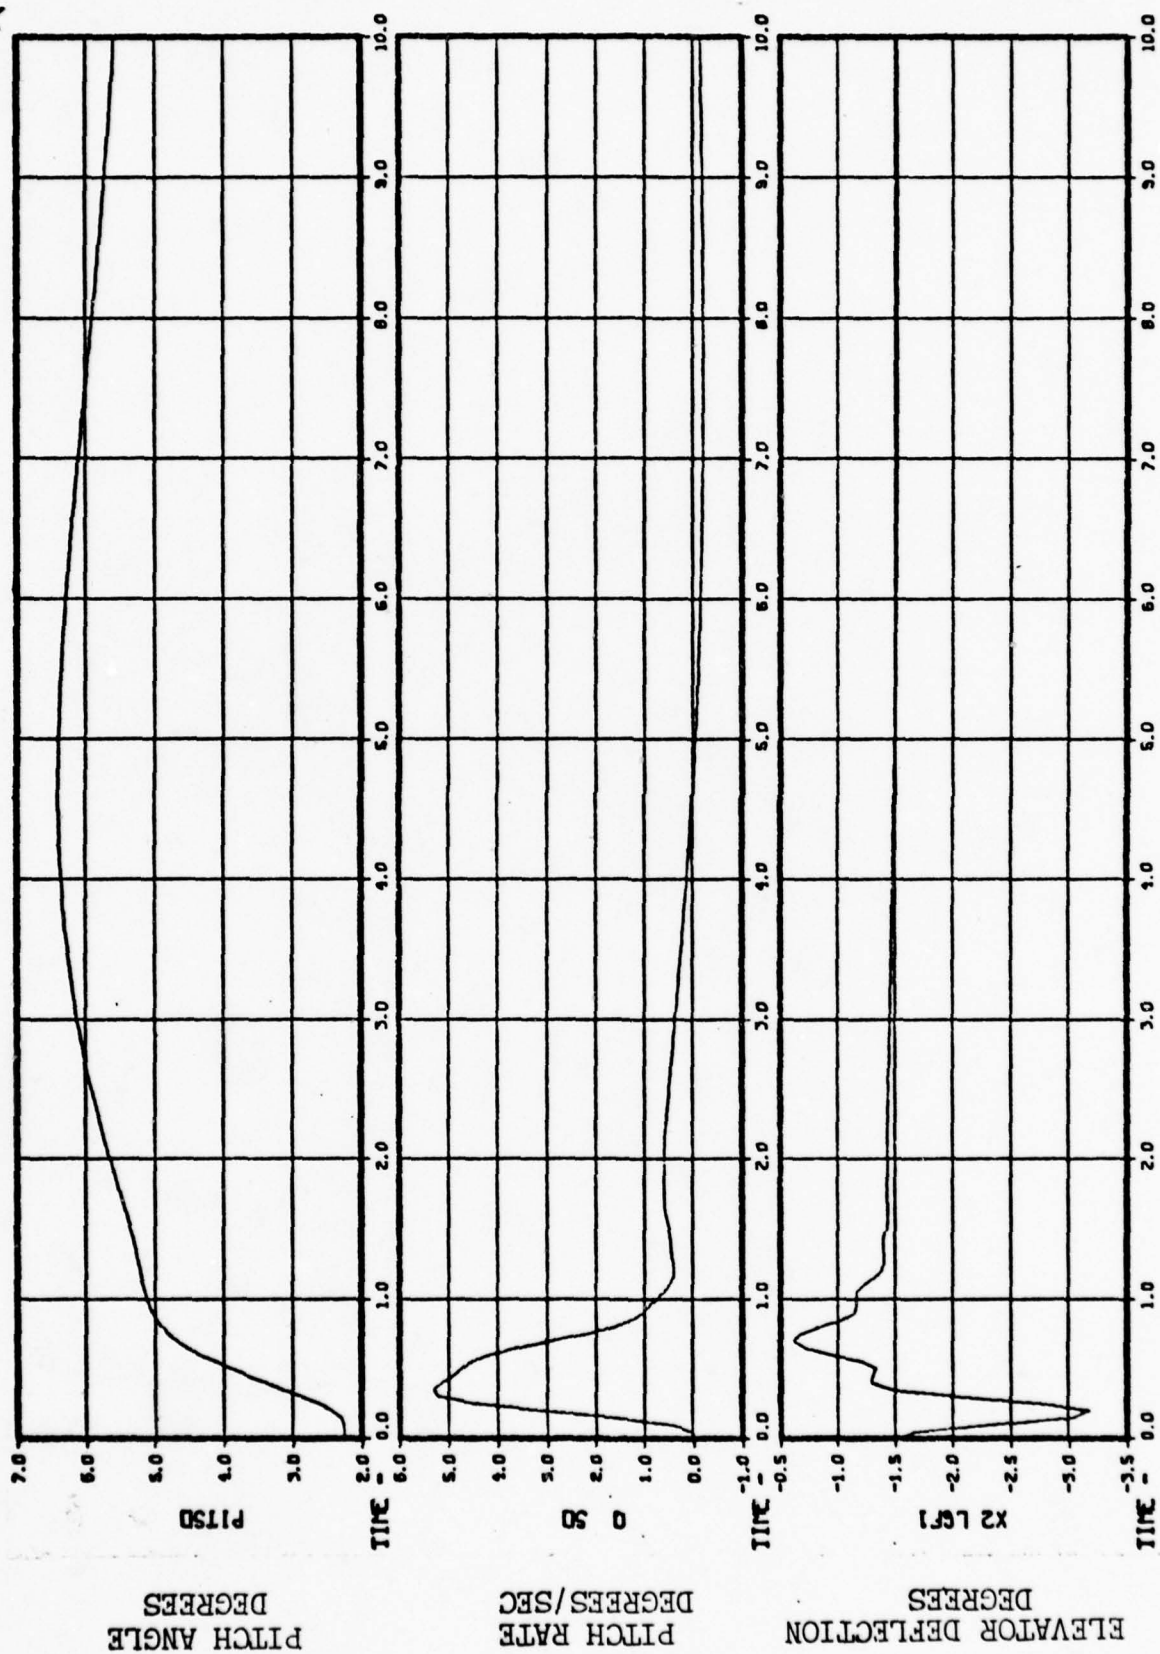
Figure 23. Normal Acceleration Configuration Time Response to Step Input Tracking Error

55

This method was attempted and the EASY program was modified to incorporate a pitch rate control system. As shown in the model diagram of Figure 3, p. 21, the normal acceleration channel was eliminated as a feedback signal by setting the gain parameter equal to zero. The angle of attack feedback channel was maintained to aid stability. Because the primary feedback variable was to be pitch rate, the washout filter in the pitch rate channel was removed. The lead-lag transfer function $2(s + 15)/(s + 30)$ was implemented as the new LEE3 component to increase the system bandwidth. Additionally, a root locus analysis was used to determine that a pitch rate feedback system gain of .3 would provide an overall system damping factor of approximately .7. An improved system performance was indicated by evaluating the open and closed loop transfer functions. The system response with the pitch rate feedback system is indicated in Figures 24, 25, 26, and 27. The response of the pitch rate system is similar to that of the normal acceleration, however, certain points are noteworthy. For example, the maximum peak of the closed loop transfer function, shown in Figure 24, occurs at the same frequency as in the normal acceleration system, but reduced to 1.28. As noted also in Figure 24, the effective

56
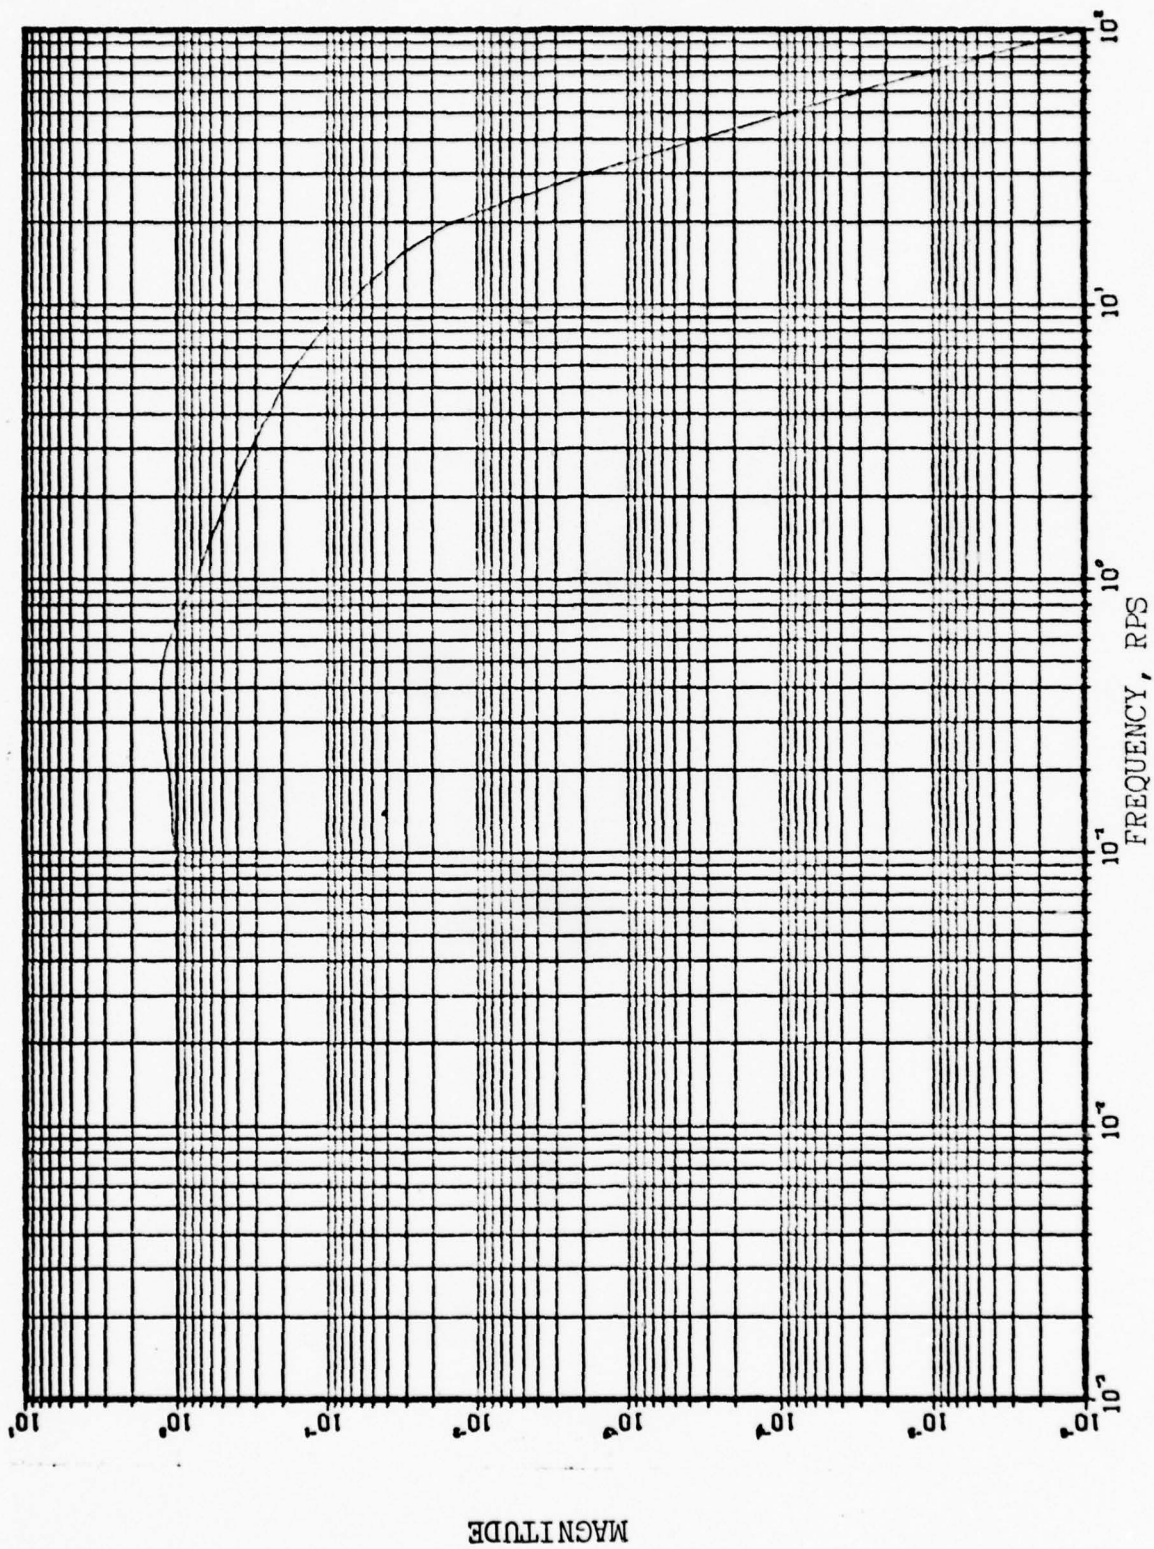
Figure 24. Pitch Rate Configuration Closed Loop Bode Magnitude Plot

57
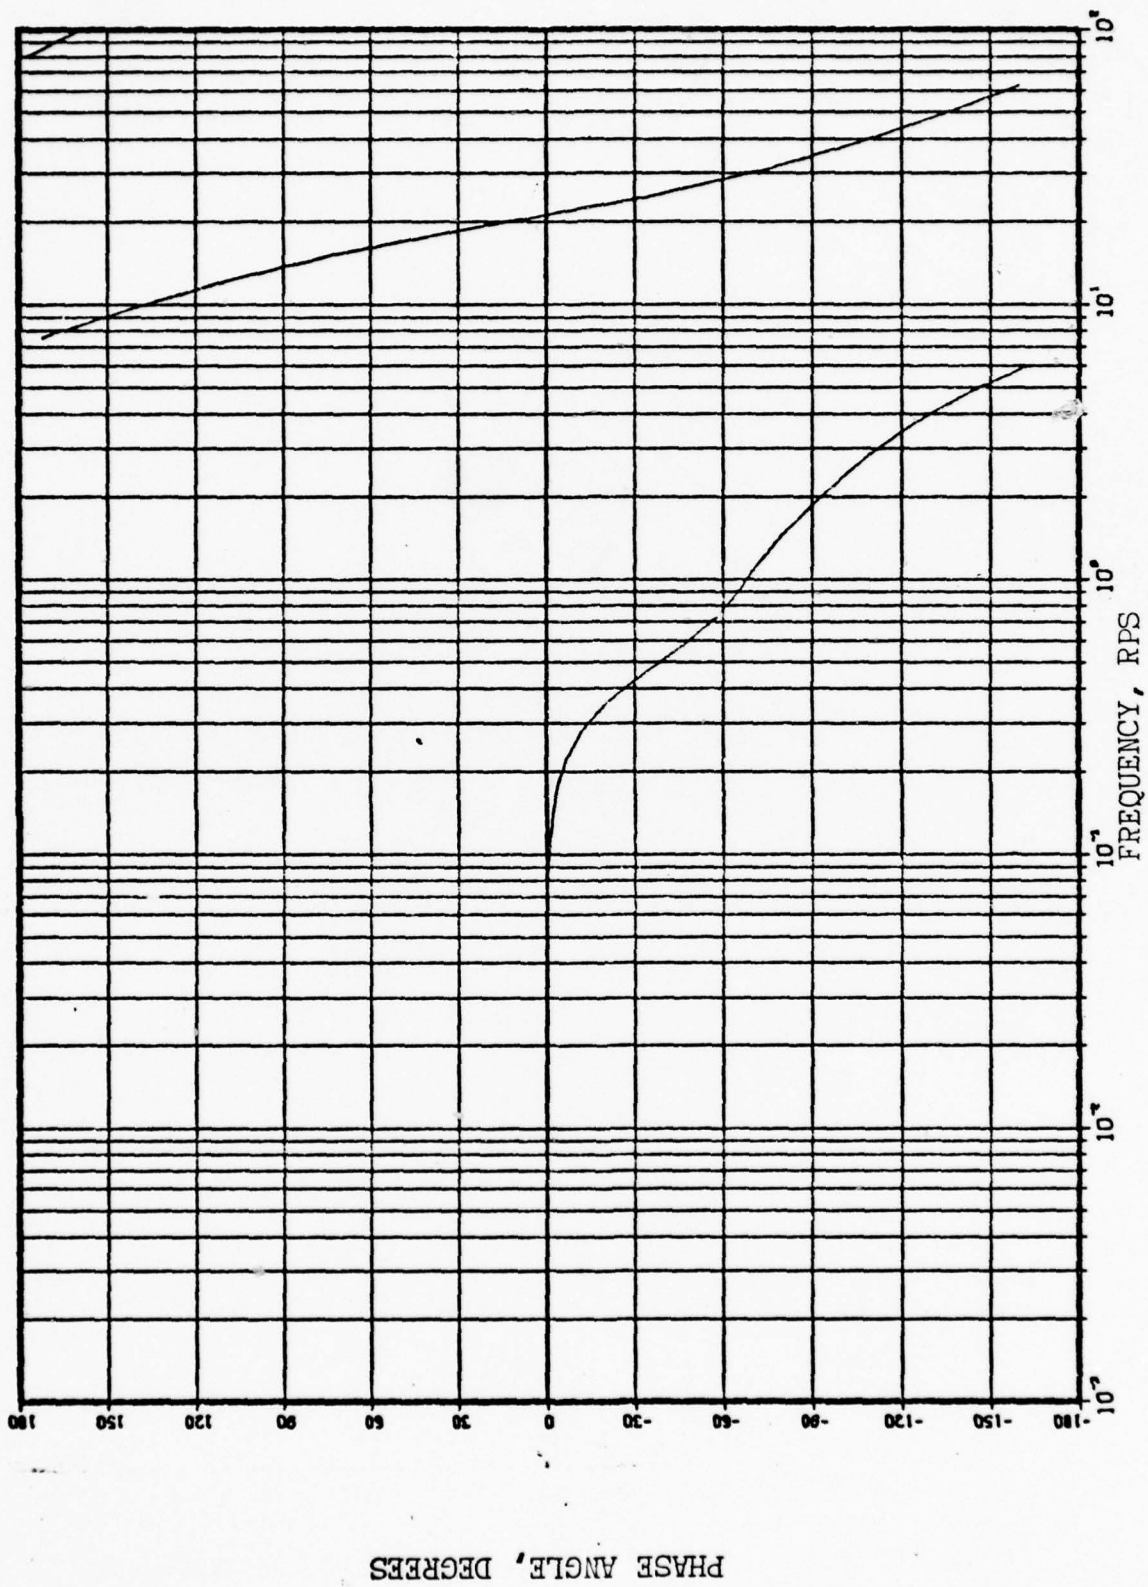
Figure 25. Pitch Rate Configuration Closed Loop Bode Phase Plot

58
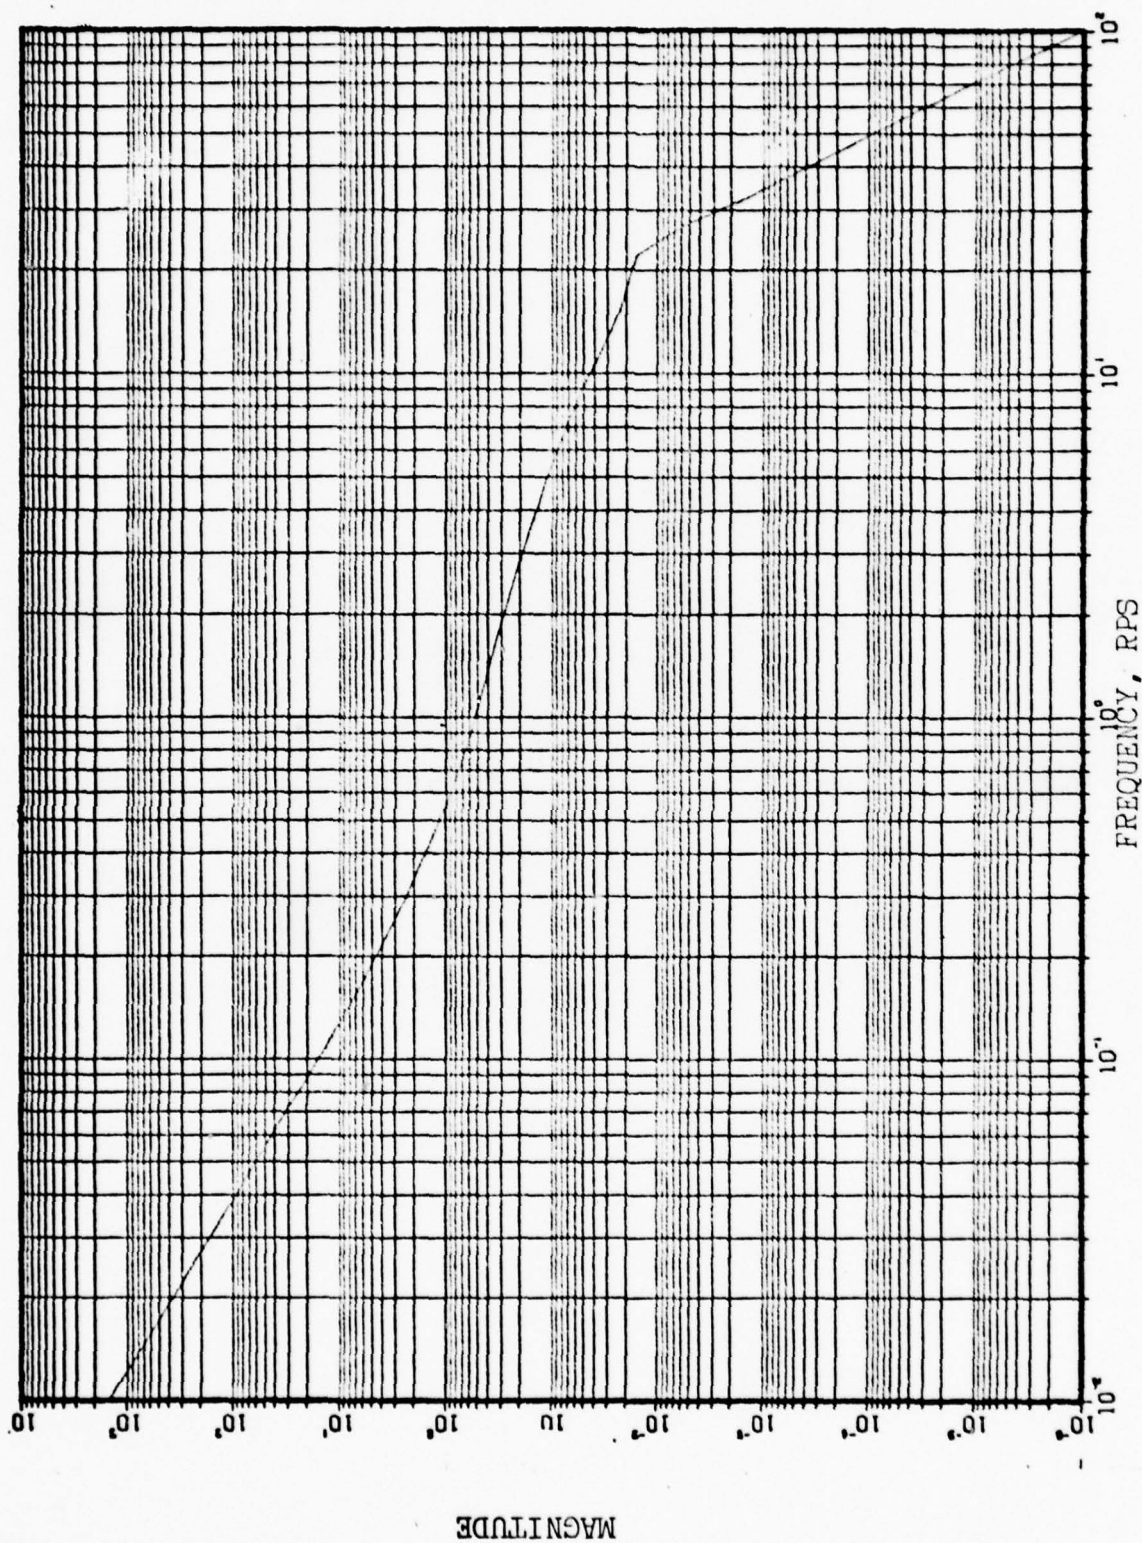
Figure 26. Pitch Rate Configuration Open Loop Bode Magnitude Plot

59

FREQUENCY, RPS

PHASE ANGLE, DEGREES
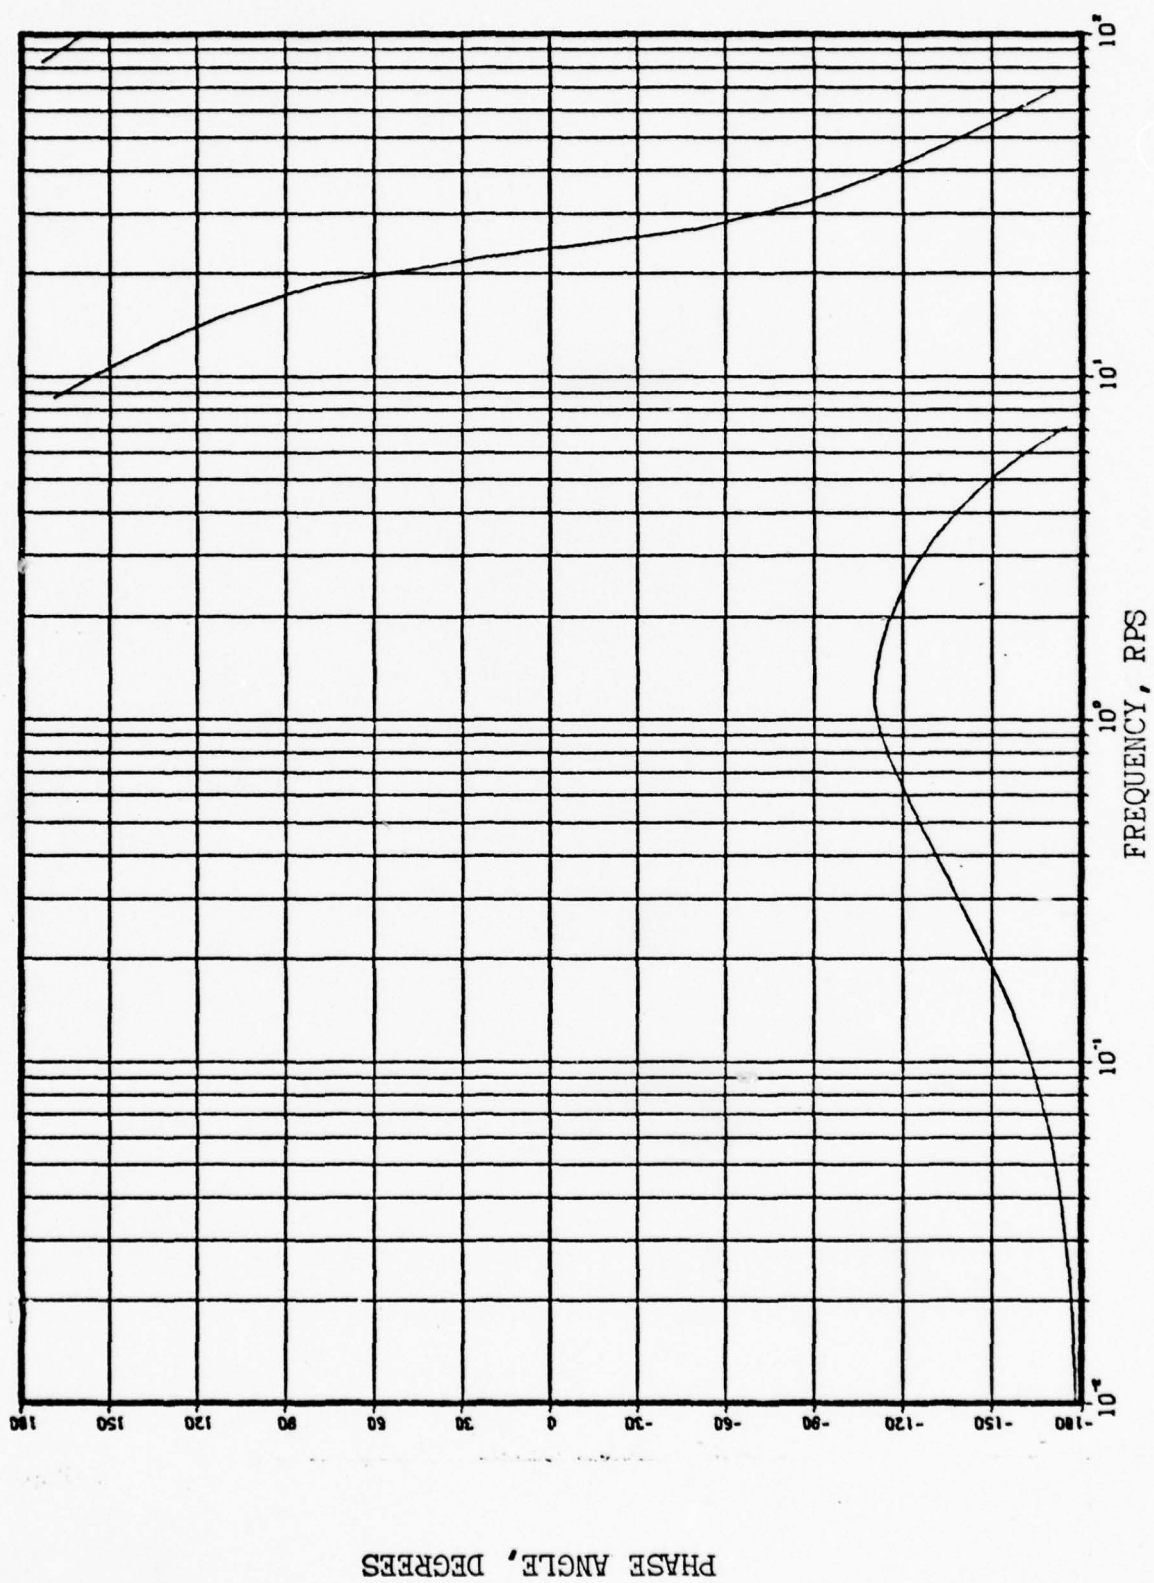
Figure 27. Pitch Rate Configuration Open Loop Bode Phase Plot

60

bandwidth of the system has been increased from .7 to 1.0 radians per second. Figure 26 indicates the gain cross-over of the open loop pitch rate transfer function occurs at approximately .75 radians per second.

The above observations imply that a pitch rate command system could be successfully implemented to achieve overall system performance improvement. To verify this, the time response of the pitch rate system to a step input tracking error is shown in Figure 28. The faster response with less overshoot is evidence of an improved system.

To summarize the results of the normal acceleration and pitch rate control system investigation, Table V lists a comparison of quantities of interest (Ref 14).

Pilot Model Study

The pilot model adapted for this investigation was developed by McDonnell Douglas Corporation with gain para-meters adjusted by General Dynamics to meet the character-istics of the F-16 aircraft. It was beyond the scope of this thesis to extensively evaluate the pilot model and con-duct an in-depth study to confirm that the pilot model used is adequate for the F-16 aircraft and gunsight characteris-tics. However, a brief examination of the pilot model loop was done to insure stability and adequate performance with

61
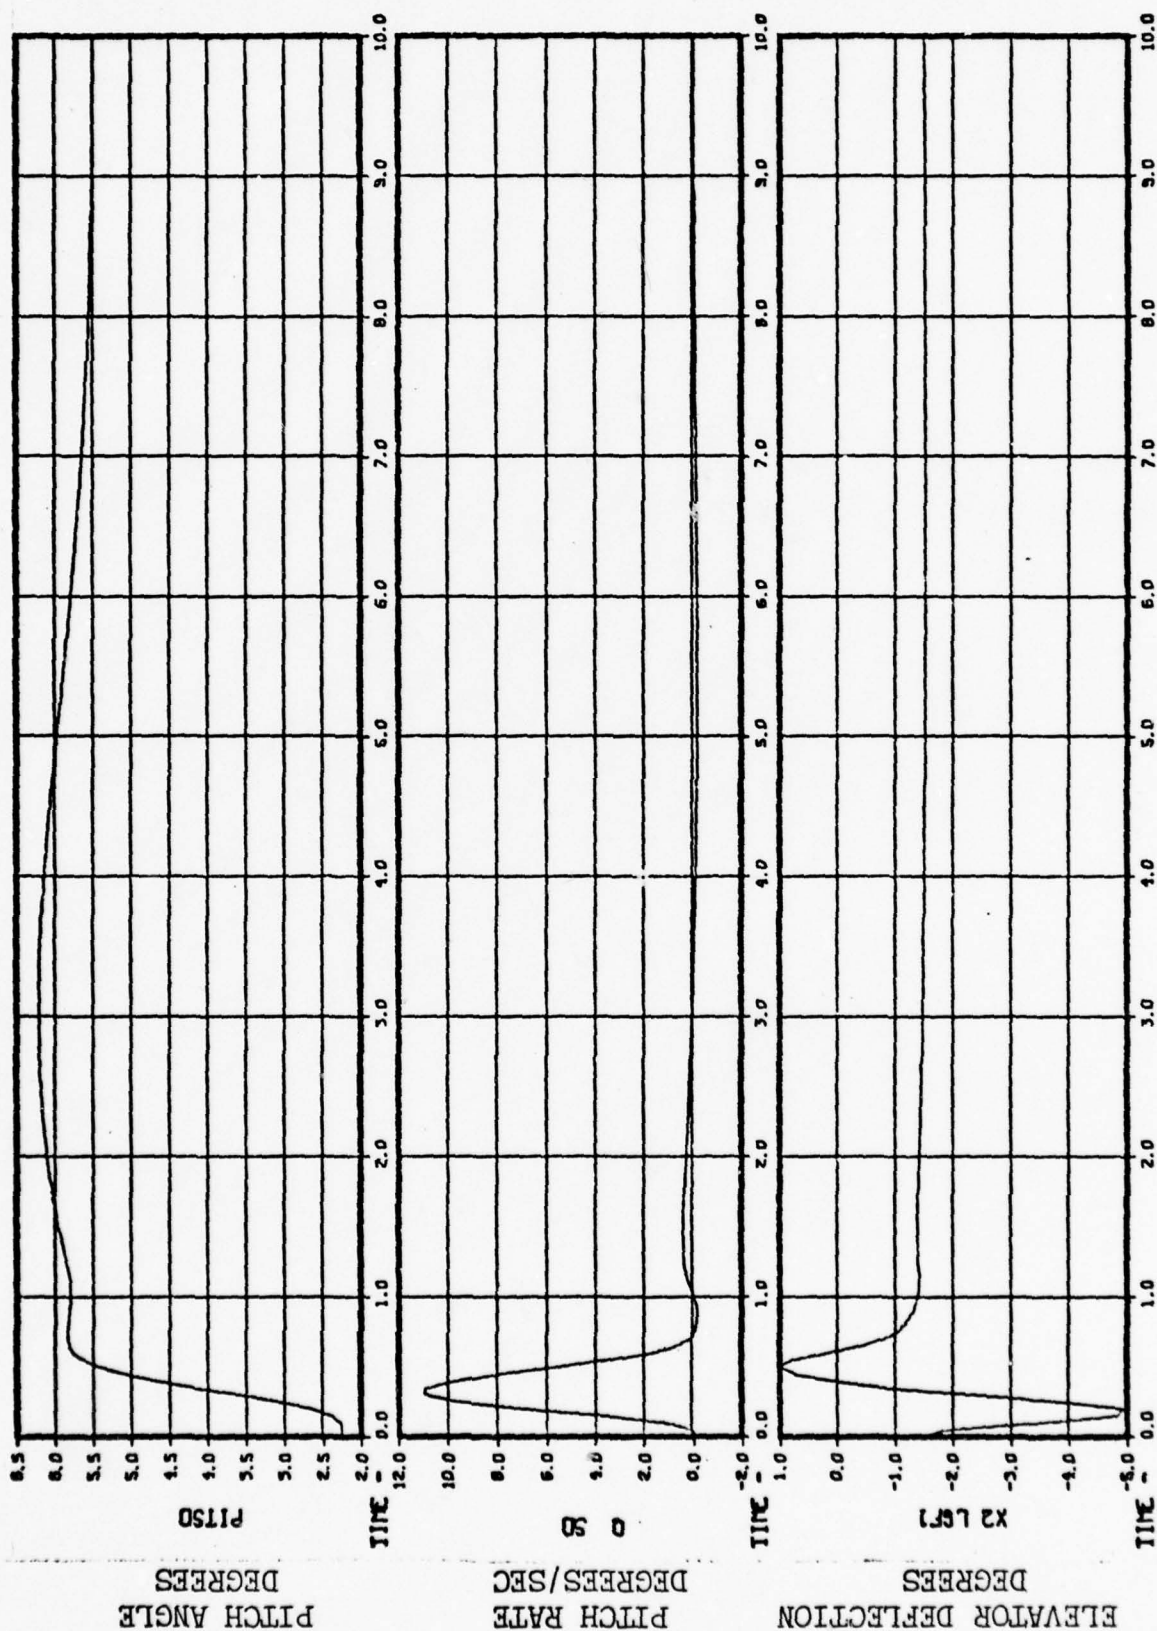
Figure 28. Pitch Rate Configuration Time Response to Step Input Tracking Error

Table V
Quantities of Interest
Normal Acceleration vs Pitch Rate Feedback
(Ref 14)

	Normal Acceleration Feedback	Pitch Rate Feedback
Max Peak Value M_m	1.43	1.28
Peak Frequency ω_m (rps)	.356	.356
Phase Margin ϕ_c (deg)	52	63
Gain Margin Frequency ω_c (rps)	.52	.75
Gain Margin (dB)	22.2	18.4
Bandwidth (rps)	.7	1.0
Time Simulation Results		
Peak Overshoot M_0 (%)	17.3	13.6
Peak Time T_p (sec)	4.7	3.25
Settling Time T_s (sec)	9.5	7.2
Rise Time T_r (sec)	.5	.4

the pitch rate control system. For the longitudinal axis, the pilot loop included the longitudinal pilot model as shown in Figure 1, p. 16, as well as the pitch command stick gradient and the stick conditioning lag filter. These three components represent the pilot loop and the open loop transfer function is as follows:

$$G(s) = \frac{159.1(s^3 + 1.325s^2 + 1.15s + 1.125)}{s(s + 8.3)(s + 20.)(s^2 + 1.2s + 1.)} \qquad (5)$$

where the pitch command stick gradient gain was selected as the upper slope value of .3182 as shown in the foldout diagram of Figure 2, p. 20.

Again, the AFIT FREQR program was used to produce the Bode magnitude and phase plot of Figure 29. The quadratic low pass filter of the pilot model causes an extensive phase shift near a frequency of 1 radian per second. An acceptable phase margin is maintained up to frequencies near 10 radians per second. The magnitude plot, although well behaved throughout the operational region of the pilot model, indicates a desirable -20 dB per decade slope at the lower frequencies for the crossover type model representation of an F-16 pilot. This brief study indicates that no adverse
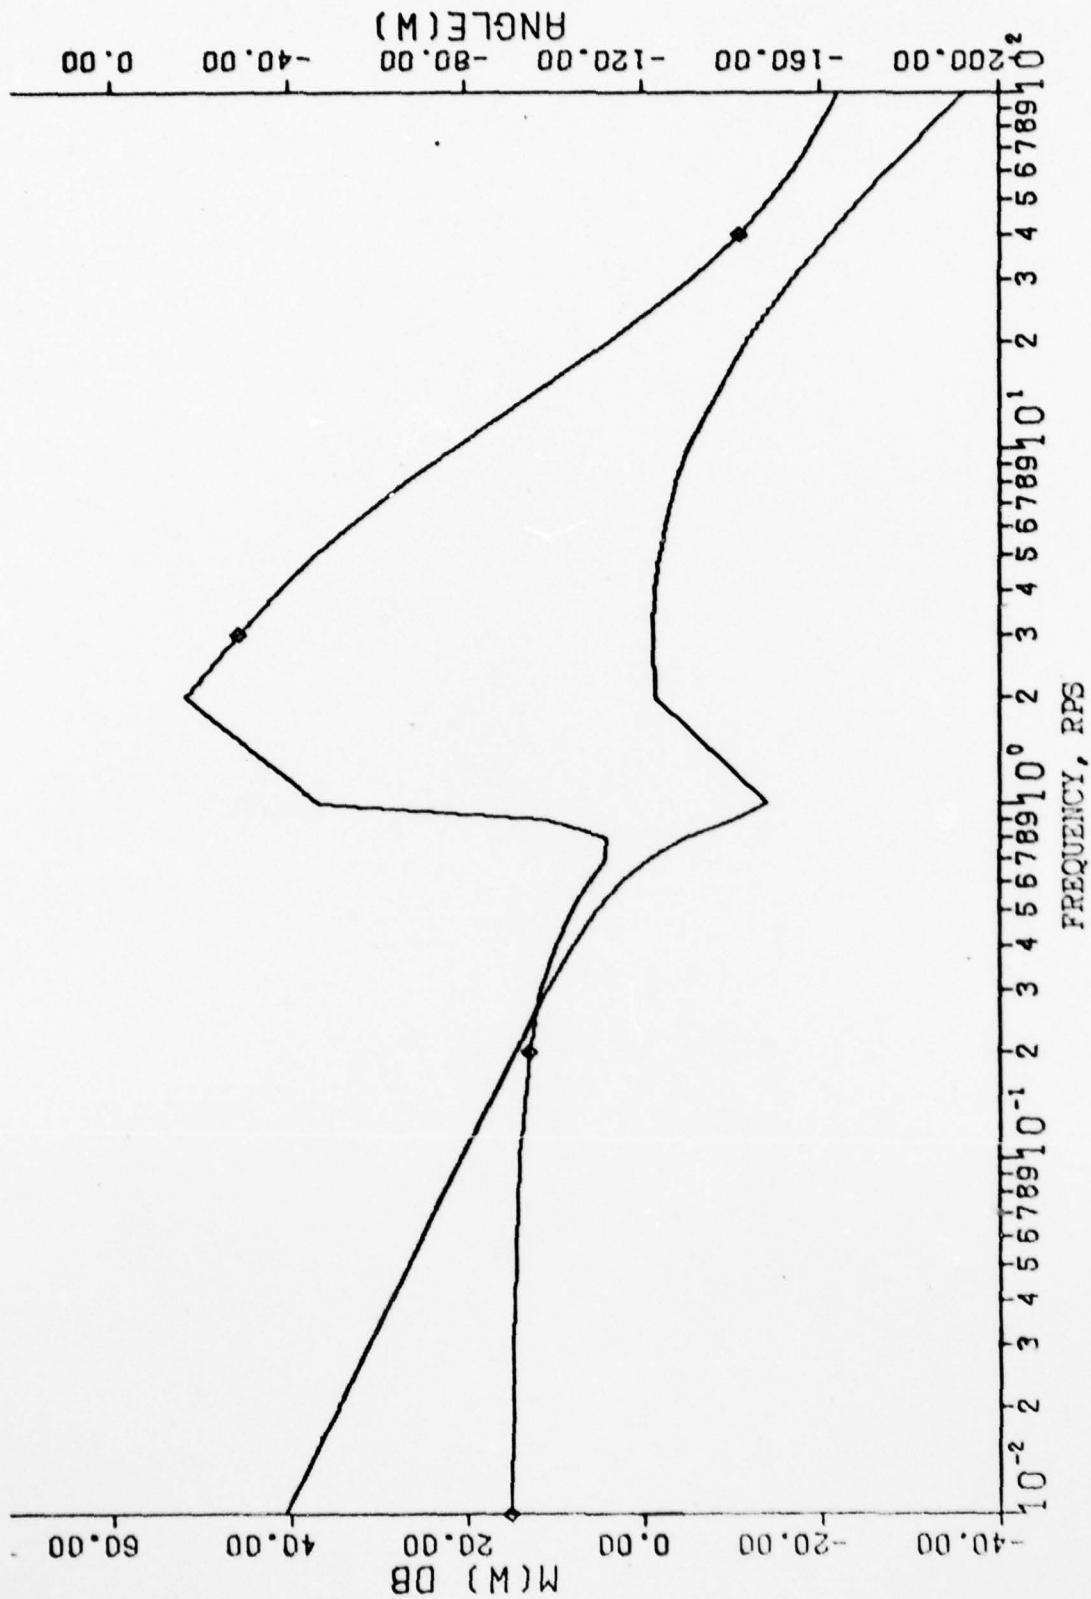
Figure 29. Pilot Model Loop Open Loop Transfer Function Bode Plot

effects should be expected with the same pilot model implemented in the pitch rate system since the effective bandwidth of the system has been increased from .7 to 1.0 radian per second. In fact, an improvement may be attained since larger magnitude outputs may be achieved through operation at the slightly higher frequencies possible with the pitch rate control system.

EASY Analysis Summary

Verification of the F-16 aircraft dynamics indicated that the EASY model characteristics were consistent with the simulation test data. By implementing an analytical pilot model, closed loop simulation analysis was made possible. A pseudo target tracking system was developed, and the performance of the present F-16 flight control configuration was examined. Investigation of a proposed pitch rate flight control configuration provided both frequency domain and time domain results that indicated target tracking improvements were possible by implementing a pitch rate control scheme. A listing of the EASY program statements used to generate the control system analysis is given in Appendix D.

V. Development of a Simulation Program

TAWDS Program Discussion

To evaluate the air-to-air tracking performance of the
F-16 aircraft model, a simulation program was needed. The
Terminal Aerial Weapon Delivery Simulation (TAWDS) program
produced by McDonnell Douglas Corporation (Ref 15) was well
suited to simulate the air-to-air encounters and provide an
evaluation of the flight control systems employed. Although
the program has provisions to simulate weapon delivery tasks
for air-to-air gunnery, air-to-ground gunnery, and bombing,
only the air-to-air, aerial gunnery programs were included
in this study. The TAWDS digital simulation program was
used to simulate both the present F-16 flight control con-
figuration and the pitch rate configuration of Chapter IV.
Implementing the pilot model discussed in Chapter II, a
deterministic evaluation of the aircraft's tracking perform-
ance was completed. Provisions of the TAWDS program include
many factors associated with aerial gunnery. For example,
the program includes the modelling effects of aircraft
dynamics, control system characteristics, gunsight character-
istics, pilot control parameters, attacker to target geometry,
target maneuvering, gun orientation, gun rate of fire and
recoil forces, bullet trajectories, random windgusts, and

stationary source errors. The above considerations make the
TAWDS digital simulation program a well suited analytical
tool to evaluate the non-linear six-degree-of-freedom air-
to-air terminal tracking task.

TAWDS Programming Techniques

The deterministic mode of the TAWDS air-to-air program
uses non-linear time varying equations to simulate a six-
degree-of-freedom attacking aircraft tracking and firing at
a five-degree-of-freedom maneuvering target. The major
subroutines of the TAWDS air-to-air program are called by
the Executive subroutine to describe the air-to-air terminal
weapon delivery task. These subroutines include Data Input,
Initial Encounter, Initial Condition, Measurement Error,
Airframe, Augmentation, Pilot, Target Initialization, Target
Aircraft, Relative Geometry, Bullet Time of Flight, LCOS
Sight, Director Sight, Bullet Integration, Performance,
Runge-Kutta Integration, and Output Subroutines (Ref 15).

In preparation for using the TAWDS program, it was
necessary to develop tabular data for the six-degree-of-
freedom non-linear F-16 aircraft model. Extensive stability
derivative data supplied by the aircraft manufacturer (Ref
16) was input into the program to provide table look-up
parameters necessary to satisfy the six-degree-of-freedom

68

equations of motion. A flight condition of altitudes near 20,000 feet with airspeed varying from .8 to .9 Mach was considered. The aircraft model selected as the data base for the EASY programming was again used in the TAWDS program. Therefore, the aircraft characteristics of Table III, p. 31, were implemented. Additional simulation specifications were allowed and the reader is referred to Appendix C and Ref 15 if programming details are desired.

The generic design of the TAWDS Data Input subroutine allowed easy implementation of parameter values. Different aircraft characteristics, flight control or pilot model parameters, or gunsight selections could be made through data changes. Initially, use of the TAWDS program was to be limited to the longitudinal axis of the flight control system, however, since weapon system effectiveness was the overall objective of the study, it did not seem realistic to evaluate this system in only one plane of motion. It was hoped that air-to-air combat encounters could be developed to provide a tracking task that would realistically evaluate the candidate flight control systems. Therefore, it was decided to implement a full six-degree-of-freedom simulation.

After the aircraft data requirements were satisfied,

the longitudinal flight control system was implemented.

Since the F-16 has a very non-conventional flight control

system, the generic flight control models of the TAWDS pro-

gram were not adaptable for the F-16 aircraft. Therefore,

FORTRAN statements were used instead to develop flight

control signal processing. The same control system simpli-

fications in the longitudinal axis as employed in the EASY

programming were also considered in the TAWDS program. Since

the primary objective was to evaluate longitudinal flight

control tracking characteristics, the cross coupling of lat-

eral and longitudinal control signalling was also eliminated.

FORTRAN statements were used to generate the gain scheduling

requirements of the flight control system. Functions such

as dynamic pressure adjusted for compressibility, static

pressure, and Mach number variables were developed within

the logic of the flight control subroutine. The schematic

diagram shown in Figure 30 shows the longitudinal flight

control system implemented in the TAWDS program. The lat-

eral-directional flight control system for the F-16 model is

shown in Figure 31. The parameter names and transfer function

names as indicated in the block diagram hold no significance

except they were programmed parameters and transfer function

70
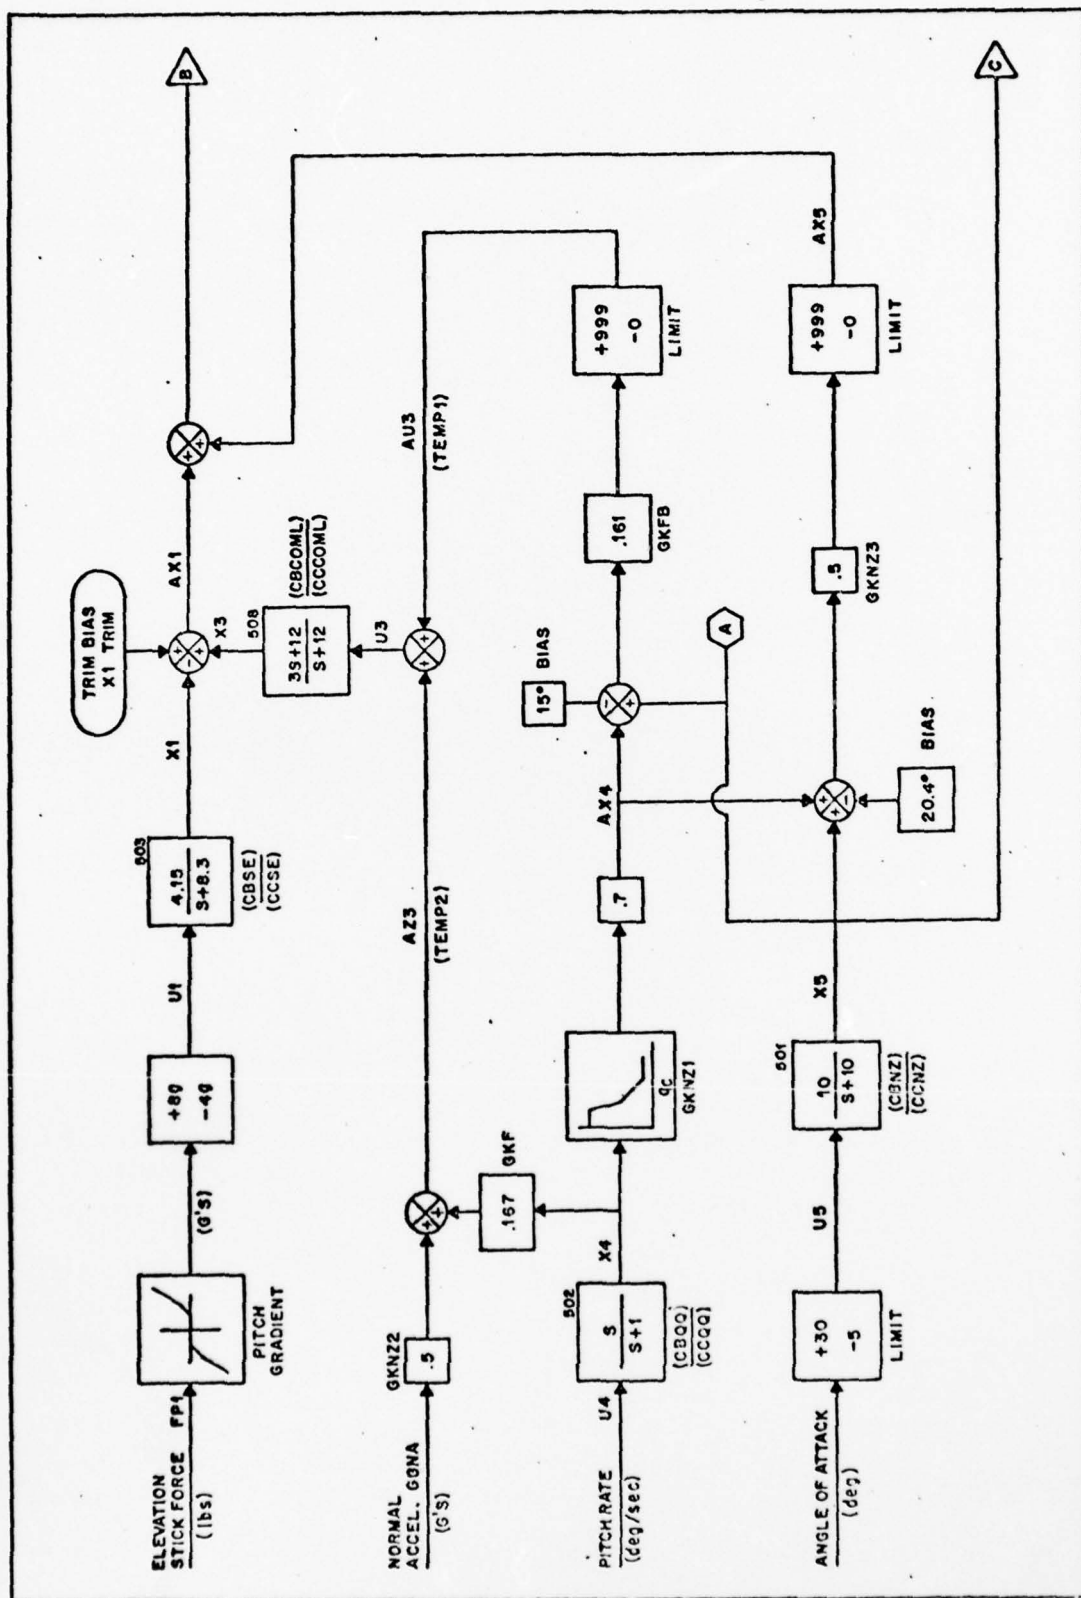
Figure 30. Longitudinal Flight Control System Schematic for TAWDS Program
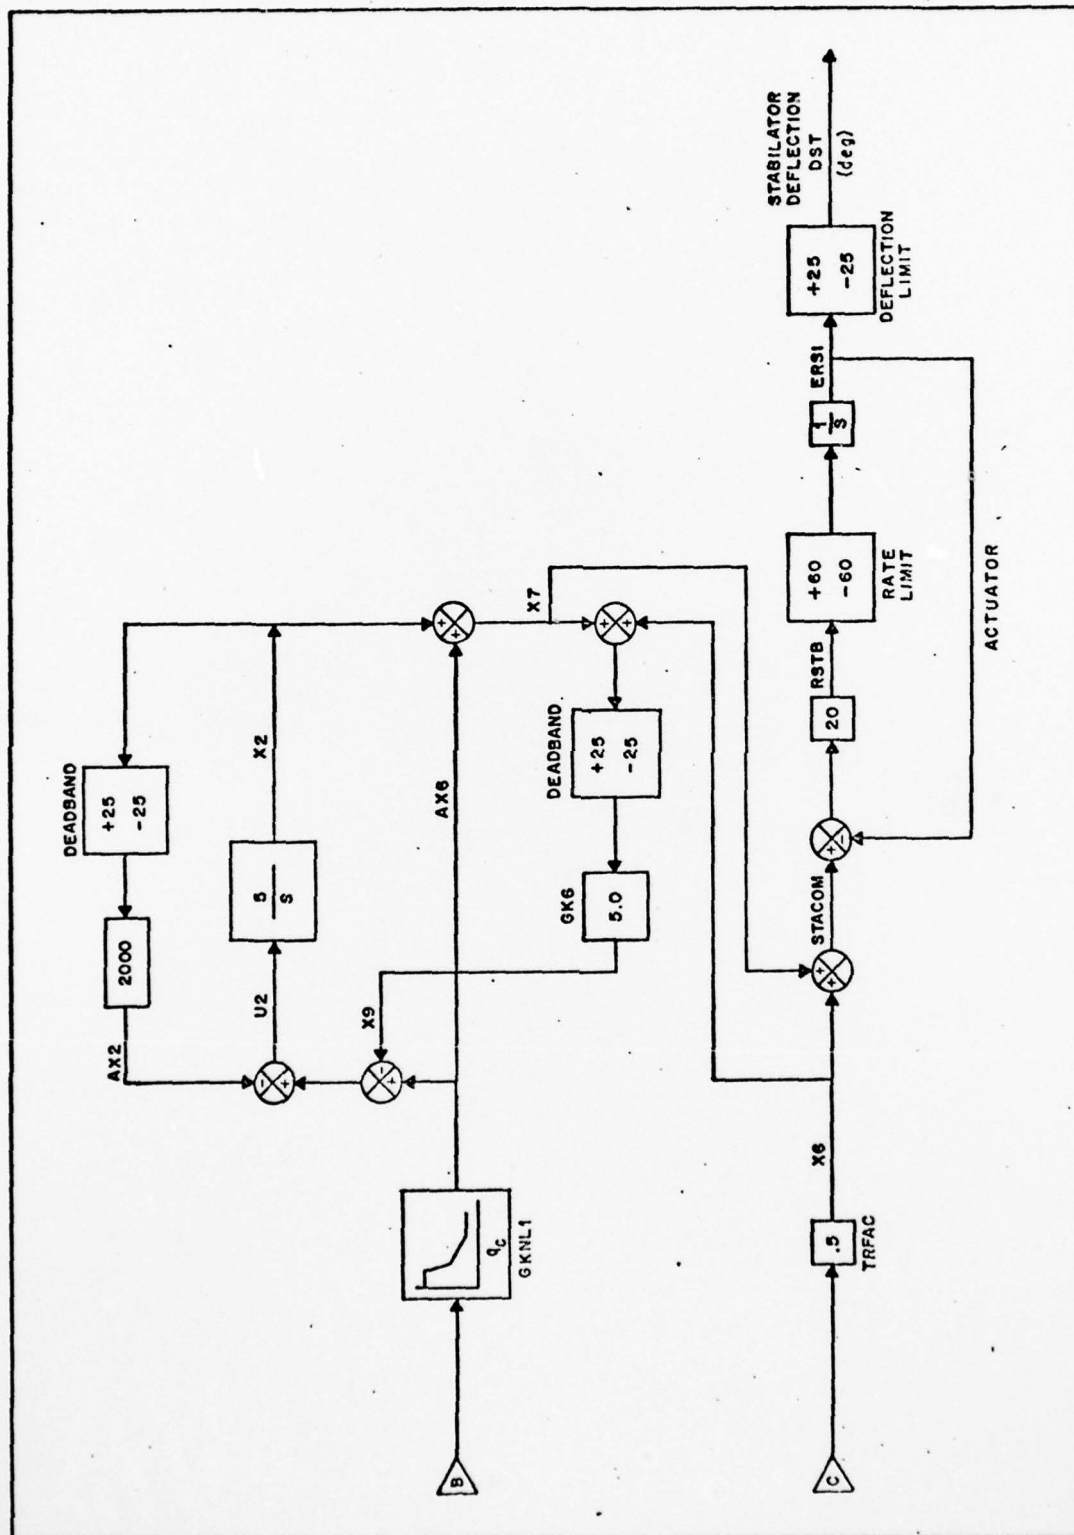
Figure 30. Continued

72
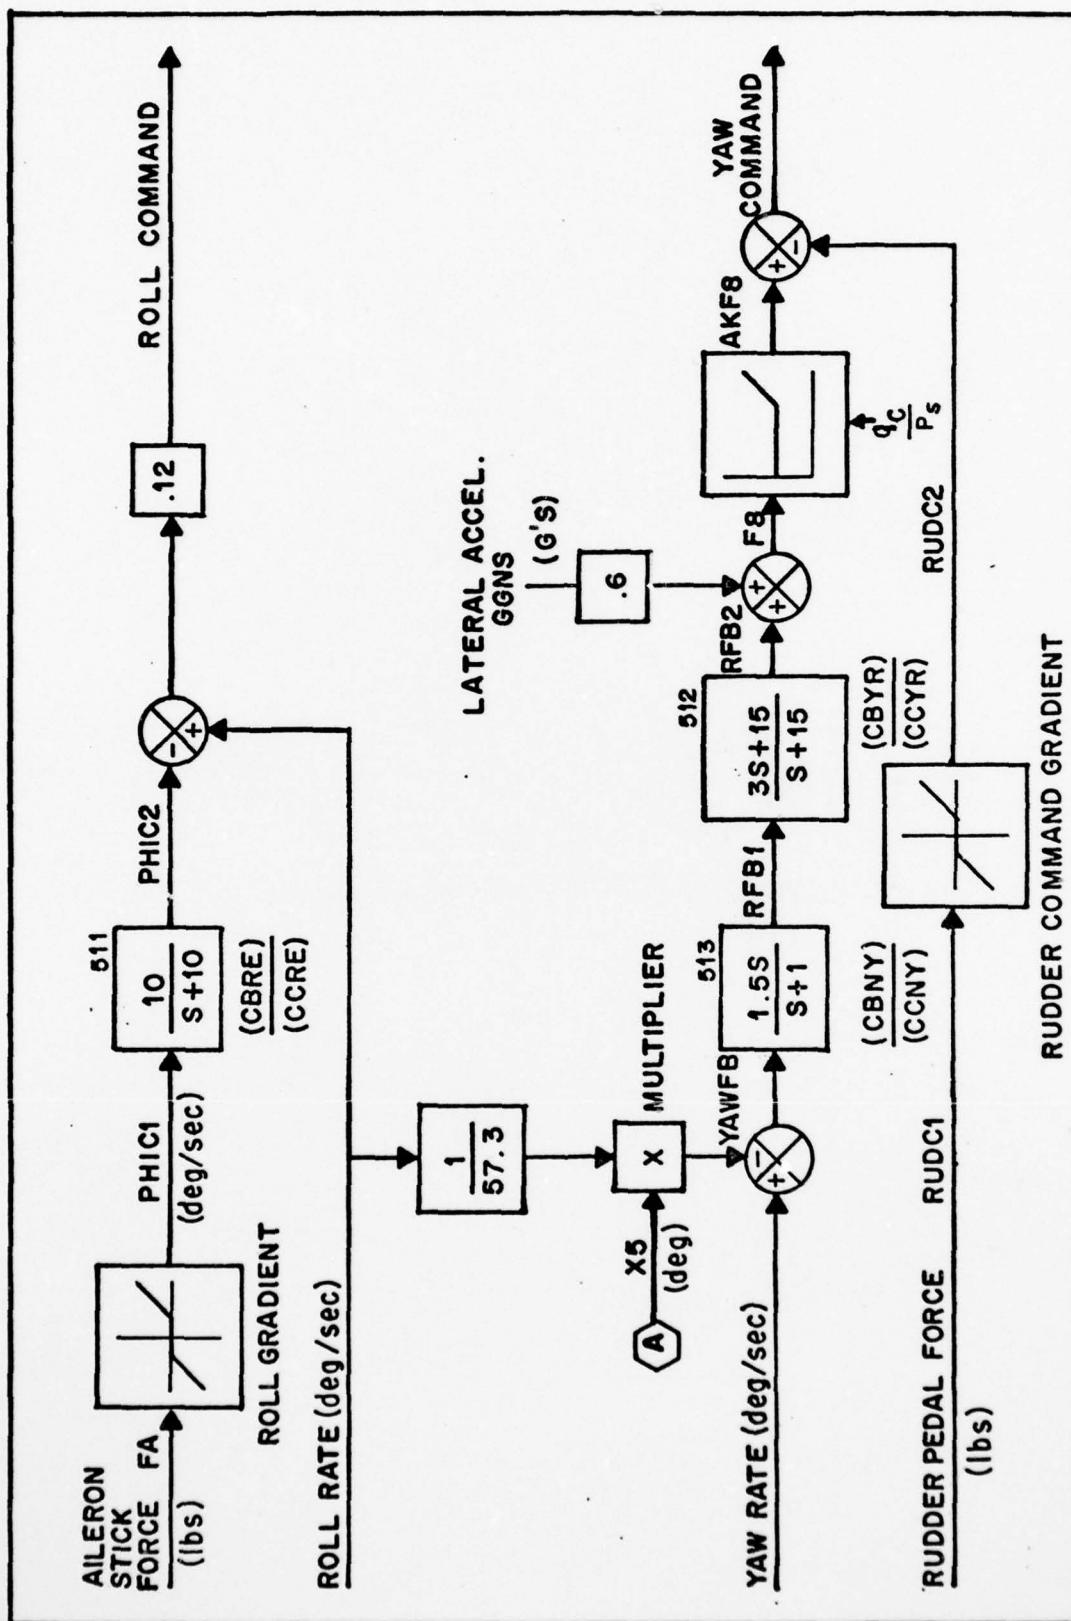
Figure 31. Lateral-Directional Flight Control Schematic for TAWDS Program
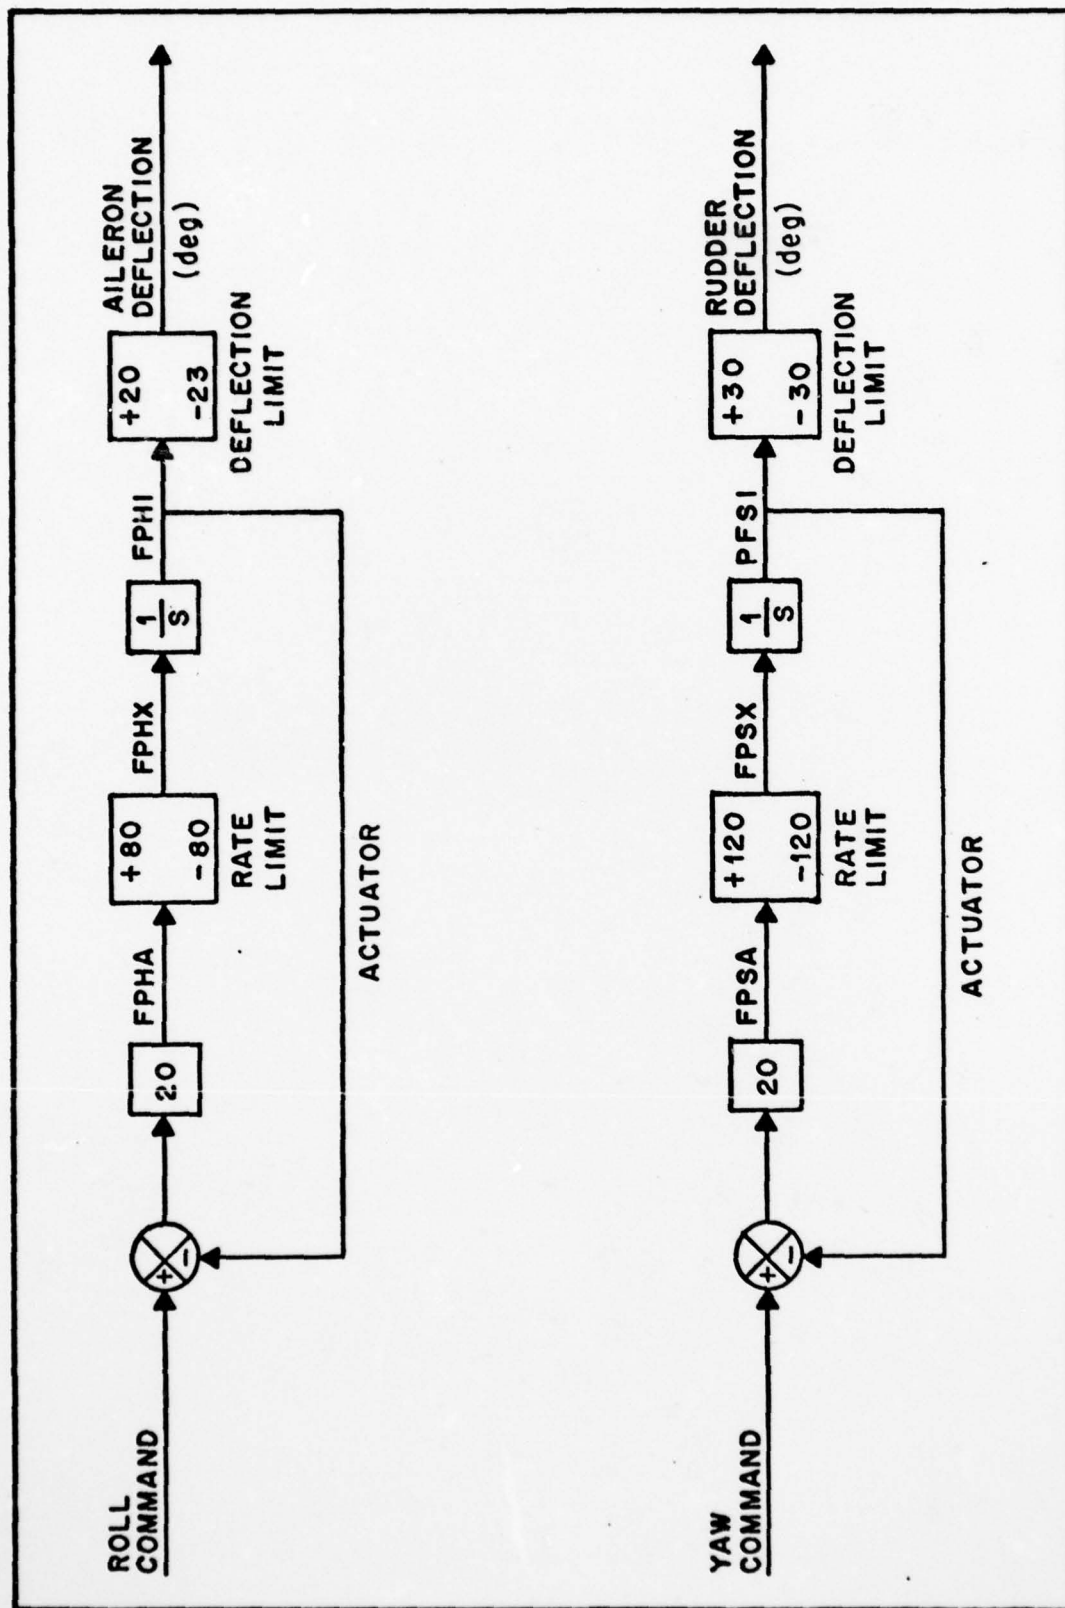
Figure 31. Continued

74

names already used in the generic TAWDS program. These were again used in the FORTRAN programming. Using these pre-programmed names simplified programming efforts, but these names bear no relation to the generic TAWDS program.

An additional trim subroutine was also used to replace the aircraft trimming techniques of the TAWDS program. This subroutine perturbed the six-degree-of-freedom equations by varying aircraft angle of attack, forces, and moments until a satisfactory trim solution was achieved about the desired flight condition. An added feature allows specification of the trim condition in terms of g's by reading in the parameter name GKMECH. For example, to achieve a trim condition of straight and level unaccelerated flight, GKMECH = 1.0. After selecting a 1 g flight condition, the TAWDS program output of stability derivatives and trim values indicated only minor numerical variances when compared to the trim condition values of the EASY program.

Next it was necessary to initialize the flight control system. The values of the aircraft feedback variables were used to initialize the transfer functions of the flight control system. The first pass through the flight control subprogram (AUTS11) initialized the transfer functions and set control conditions to satisfy the trim condition. A stick

75

trim bias as shown in the pilot channel of Figure 30 was calculated to provide the nominal stick forces necessary to balance the control surface deflection.

The pilot model and gain parameters as discussed in Chapter III were also included in the TAWDS programming model. Since a full six-degree-of-freedom simulation was to be developed, the multi-axis F-16 pilot model was adapted which included not only the longitudinal axis, but also the lateral-directional axis.

The generic quality of the TAWDS programming ability was very helpful in implementing the pitch rate control system of Chapter IV. It was not necessary to extensively change the flight control model as in the EASY program. Parameter value changes read in as data could effectively modify the normal acceleration system to incorporate the pitch rate control. For example, setting the parameter GKNZ2 shown in Figure 30 equal to zero eliminated normal acceleration feedback. The transfer function CBQQ/CCQQ was set to unity and the transfer function CBCOML/CCCOML was changed to the desired filter $2(s + 15)/(s + 30)$. By setting the parameter GKF = .3 as determined by the root locus analysis mentioned in Chapter IV, and adjusting the pilot loop gain to command degrees per second instead of g's,

(e.g. CBSE = 10.00), the pitch rate system implementation for the TAWDS program was completed.

Data parameters would also allow the selection of either the LCOS or director sight to be implemented into the simulation program for each run. By implementing either of the above sights, the system developed to this point could be considered as a manual director system or a manual LCOS system. Variations of the multi-axis pilot parameters would be necessary to operate the different gunsight systems.

Air-to-Air Scenarios

A series of air-to-air gunnery encounters were developed to evaluate the flight control systems. The Initial Condition subroutine was programmed to set the attacker aircraft at the flight condition to begin eight air-to-air engagements. For each target scenario, the attacker aircraft was initialized near straight and level unaccelerated flight at 20,000 feet and airspeed of .8 Mach. A target range of 5,000 feet was selected for the first four target maneuvers and a range of 7,000 feet for the last four maneuvers. Varying range rates (i.e. attacker to target closure rate) from -50 to -200 feet per second were programmed also. This established the initial target aircraft airspeed for each scenario.

77

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1963 A
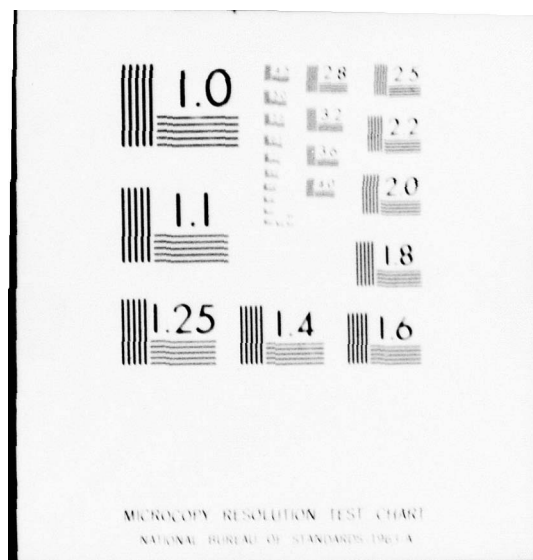
In addition to initializing the attacker aircraft, target aircraft maneuvers were developed. To be consistent with terminal tracking environments, evasive maneuvers were programmed for an F-4 aircraft target model. Specifications for the target model included time intervals to begin and end each maneuver, bank angle rate, angle-of-attack rate, and thrust rate. A three digit code of a selected bank angle rate, angle-of-attack rate, and thrust rate was developed for specific target maneuvers at selected time intervals during the tracking scenario. Table VI describes the maneuvers developed and the corresponding NIC number used to select each encounter. Generally, the target maneuvered during the first two seconds of the program into a right or left 90° bank turn for a specified g and then completed either a split S or jink maneuver at a specified time as the scenario reached the terminal time of fifteen seconds. These eight air-to-air encounter scenarios were used as a basis to evaluate the director sight implementation under both the normal acceleration and pitch rate flight control configurations. With the deterministic mode selected, the program would complete one pass through each case and generate time history data to measure the attacker aircraft performance while tracking

78

the target aircraft through the selected maneuvers. Both

mean and RMS elevation and traverse tracking error informa-

tion was to be used to measure the tracking effectiveness.

The TAWDS program information is shown in Appendix C.

Table VI
TAWDS Air-to-Air Target Maneuvers

NIC	Max g	Closure (ft/sec)	Time (sec)	Range (ft)	Maneuver Description
1	3.6	-100	0-2 15	5000 1000	Roll 90° left
2	4.2	-50	0-2 10-11 15	5000 2600 1200	Roll 90° left Roll 30° left
3	3.2	-150	0-2 12-13 15	5000 1500 800	Roll 90° left Roll 30° right
4	3.4	-150	0-2 8-10 15	5000 2500 800	Roll 90° right Roll 45° right
5	3.2	-150	0-2 8-10 15	7000 4000 1400	Roll 90° right Roll 30° right
6	3.5	-200	0-2 8-10 15	7000 4000 1400	Roll 90° left Roll 45° left
7	3.3	-150	0-2 6-8 15	7000 5000 1400	Roll 90° left Roll 45° left
8	4.3	-200	0-2 6-8 15	7000 5000 1500	Roll 90° right Roll 90° right

VI. Results

TAWDS Simulation Techniques

The results of the EASY Analysis of Chapter IV indicated an improved target tracking system could be achieved by implementing a pitch rate flight control system for the F-16 aircraft. To verify these results, each of the eight air-to-air target encounters was run using the TAWDS program model. This digital simulation included the full six-degree-of-freedom aircraft model, multi-axis pilot model, and lateral-directional as well as longitudinal flight control system. Both the present F-16 flight control configuration and the proposed pitch rate control system were evaluated using the director sight implementation.

Runge-Kutta integration was used for the simulation using a .05 second iteration step size. Although a smaller step size would provide better numerical accuracy, it would also require greater computer time. The step size of .05 was determined to be the maximum size for the simulation components and this step size worked well for the normal acceleration configuration. However, for the proposed pitch rate configuration, this step size was not sufficient. Modelling of a time constant of 1/30 seconds could not be accomplished with a step size of .05 seconds. It was

necessary to reduce the step increment size to less than the largest time constant of the system. Test runs were made using step sizes of .01 and .001 seconds. Very little numerical differences were noted with the smaller step size and therefore the significant increase in computer operation time was not justified. Since the normal acceleration configuration system had already been completed with a step size of .05 second, it was desirable to use the same step size for the pitch rate configuration also. To do this, it was necessary to slightly modify the lead-lag compensator that had been implemented for the pitch rate system. The transfer function CBCOML/CCCOML was adjusted from a value of $2(s + 15)/(s + 30)$ to $2(s + 7.5)/(s + 15)$. This allowed the .05 step size to be maintained and provided significant computer cost savings.

TAWDS Simulation Results

The tracking performance of the F-16 attacker aircraft for each of the eight encounters is summarized in Table VII. The mean, RMS, and standard deviation of both the elevation and traverse aiming error is shown for both systems. The bar graphs of Figure 32 and 33 compare the RMS elevation and traverse aiming errors, respectively. Improvements in elevation tracking can be seen while the traverse errors remain

81

Table VII
Summary of TAWDS Simulation Tracking Aim Error
with Director Sight Implementation
(measured in mils)

	Present F-16 Normal Acceleration Configuration					
	Mean		RMS		Standard Deviation	
NIC	Elevation	Traverse	Elevation	Traverse	Elevation	Traverse
1	-22.2	-17.8	24.1	19.8	9.4	8.7
2	-21.8	9.3	24.3	14.0	10.7	10.4
3	-21.2	7.7	23.3	13.7	9.6	11.4
4	-24.0	-24.8	26.2	27.9	10.4	12.8
5	-20.8	-16.7	25.7	25.1	15.0	18.8
6	-21.6	14.9	26.8	20.2	15.9	13.6
7	-20.6	11.1	26.3	20.1	16.3	16.8
8	-21.4	-28.1	27.5	35.4	17.3	21.5
	Pitch Rate Configuration					
1	-15.8	-17.1	18.8	19.4	10.2	9.2
2	-15.8	8.9	19.1	14.5	10.8	11.5
3	-15.3	7.3	17.7	14.0	9.1	11.9
4	-19.0	-23.9	24.0	27.2	14.6	12.9
5	-13.2	-13.7	17.8	27.8	12.0	24.2
6	-13.2	13.4	17.1	22.4	10.8	18.0
7	-12.9	9.2	17.1	22.5	11.2	20.5
8	-13.0	-25.7	16.8	36.3	10.7	25.5
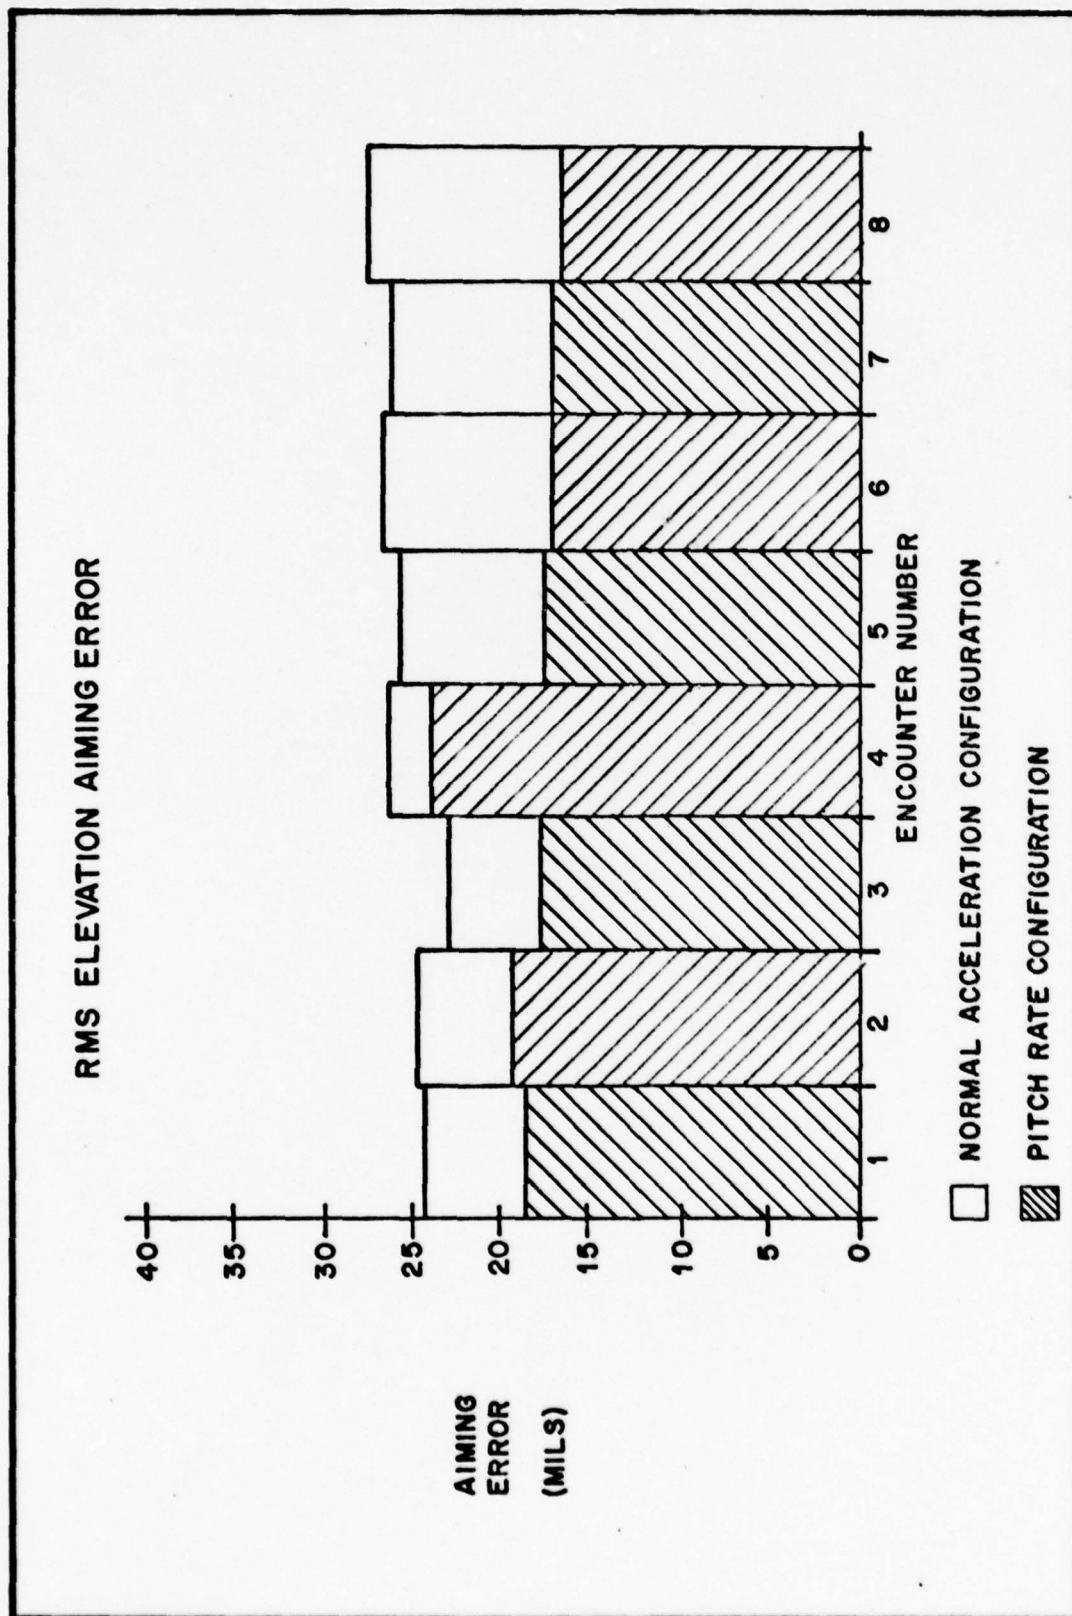
Figure 32. RMS Elevation Aiming Errors of the Eight TAWDS Simulation Encounters
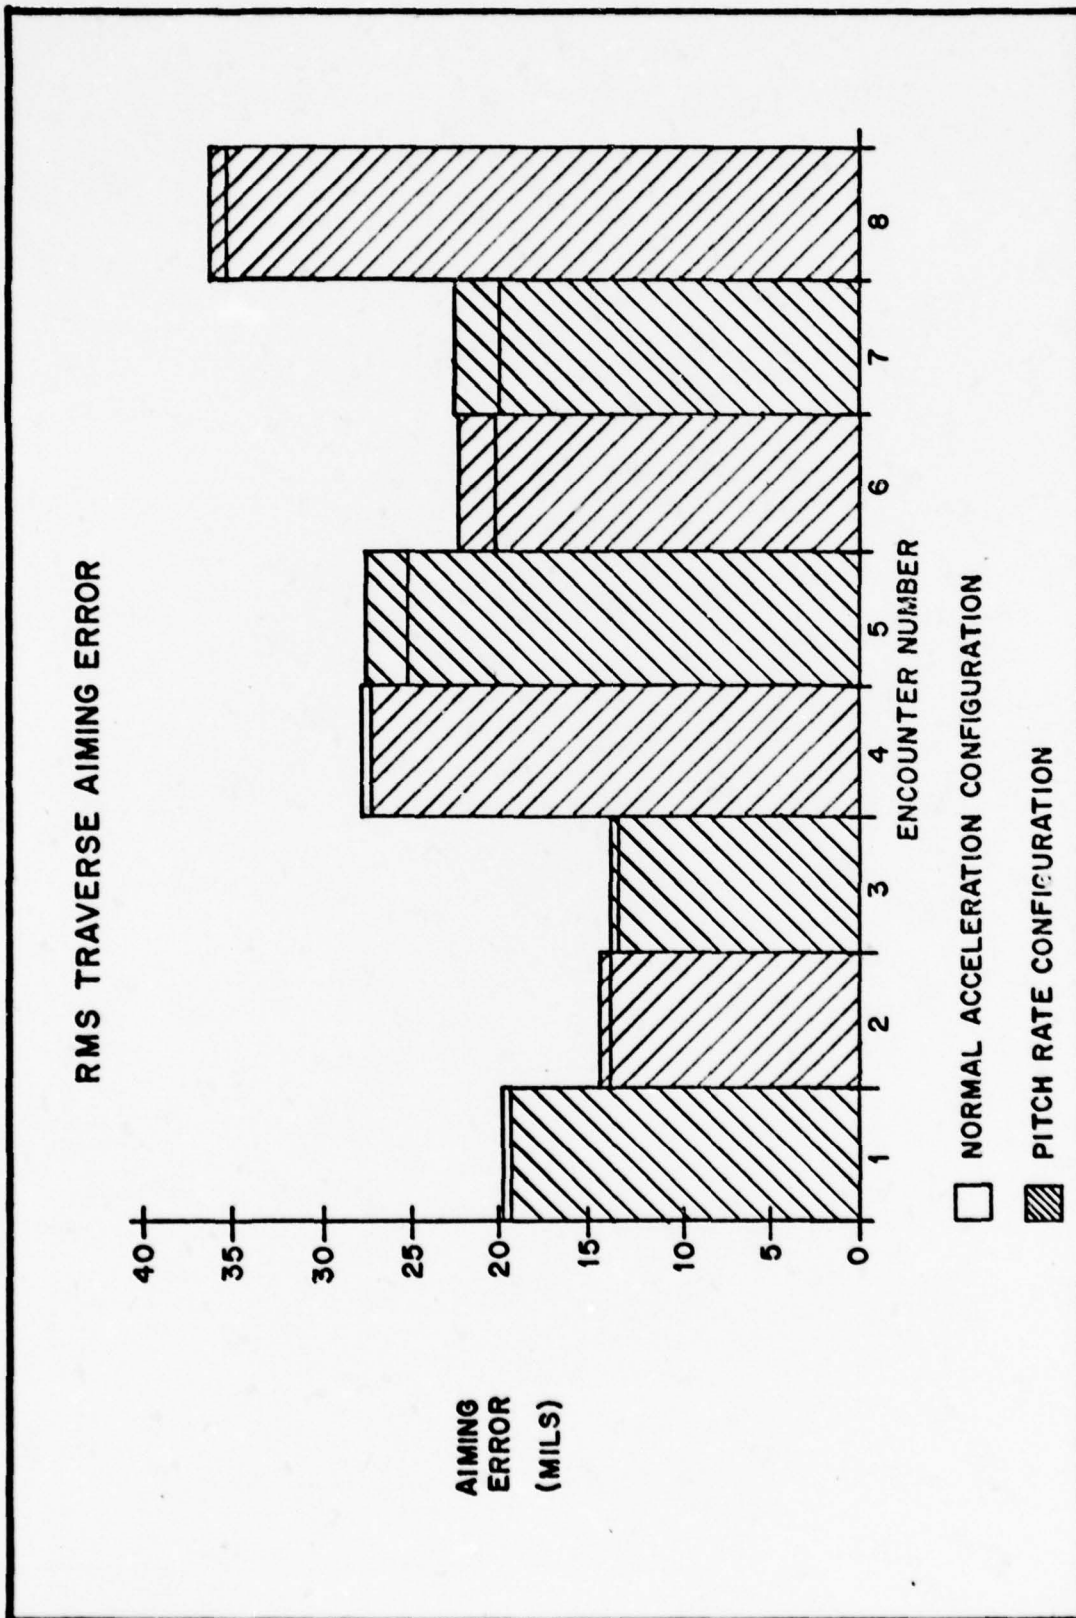
Figure 33. RMS Traverse Aiming Errors of the Eight TAWDS Simulation Encounters

84

approximately the same. The results indicate that the elevation aiming error has been improved by an average of 20% for the first four encounters that were initialized at a range of 5000 feet. The improvement is increased to an average of 35% for the last four encounters that were initialized at a range of 7000 feet. The least improvement of all is shown in encounter 4. This is attributed to the target maneuvering at the most critical range for air-to-air combat of 2500 feet. It is interesting to note that the tracking performance of the pitch rate system shows the greatest improvement in encounter 8. This was considered the most difficult encounter of all since the F-4 target aircraft completed a split-S maneuver during the 15 second terminal chase. This result indicates that the pitch rate system of the longitudinal axis provides a greater improvement over the normal acceleration configuration as the difficulty of the tracking task increases.

VII. Conclusions and Recommendations

Conclusions

From the previous analysis and simulation results, it is concluded that improvements in target tracking are possible by tailoring the flight control system of fighter aircraft. Both the EASY Analysis and the TAWDS simulation results indicate improvements in the system response of a pitch rate feedback implementation as compared to the normal acceleration implementation presently employed in the F-16 aircraft.

EASY Analysis. The EASY Analysis program allowed investigations of system responses with both the normal acceleration and pitch rate flight control configurations. By eliminating the normal acceleration feedback and compensating the pitch rate feedback, it was shown using the EASY program that a very similar overall closed loop system was maintained, with certain noted improvements. A better damped system was achieved with an increased phase margin and bandwidth as shown by Table V, p. 63. The time simulation results of the EASY program verified the improved system response to a pseudo tracking task in the longitudinal axis. The aircraft model response to a pitch angle step input to the pilot model indicated improvements with

86

the pitch rate implementation. As shown in Table V, p. 63,
the pitch rate system provides better damping, faster re-
sponse, and quicker settling to the step input signal than
the normal acceleration system.

TAWDS Simulation. Similarly, the results of the TAWDS
simulation air-to-air combat encounters substantiated the
results of the EASY program analysis. The tracking aiming
error quantities of the eight air-to-air encounters as shown
in Table VII, p. 82, clearly indicate the improvements of
the pitch rate flight control system. Elevation tracking
error, both mean and RMS, was reduced in each of the target
tracking scenarios. These air-to-air encounters provided
a realistic environment to test the performance of both the
normal acceleration and pitch rate flight control configura-
tions. The different target airspeeds, target load factors,
and target rolling maneuvers of each scenario allowed the
evaluation of each system throughout a variety of flight
conditions. The full six-degree-of-freedom non-linear
simulation developed for the TAWDS program enabled a realis-
tic performance evaluation for the terminal phase of air-to-
air combat.

Aircraft Model Validation. Techniques for verifying
the aircraft flight dynamics were shown using the EASY

87

Analysis program. The roots of the characteristic equation

for the longitudinal dynamics very closely matched those of

the LAMARS test case used to model the F-16 aircraft as

shown in Table IV, p. 38. In addition, the transfer func-

tions of alpha/elevator deflection and theta dot/elevator

deflection were completed to verify the numerator dynamics

of the model.

Pilot Model Performance. The satisfactory performance

of the analytical F-16 pilot model clearly demonstrated the

usefulness of such a model for closed loop system investi-

gations. It is concluded that the gain sensitivity para-

meters of the pilot model are sufficient to allow a qualita-

tive comparison of the flight control configurations ex-

amined. The pilot model control stick responses of the TAWDS

program (see Appendix C) indicated reasonable responses to

tracking error signals.

Recommendations

It is my recommendation that extensive digital simula-

tion be continued to investigate flight and fire control

systems for fighter aircraft. The specific recommendations

from this study include the following:

Refine Pitch Rate Control. The mechanization of the flight control system using the C* concept considered only one extreme implementation, that of eliminating the normal acceleration and conditioning the pitch rate feedback. Since the C* approach implies a linear blend of normal acceleration, pitch rate, and pitch acceleration, it is recommended that other possible combinations of feedback variables be investigated.

Flight Envelope Expansion. The end game problem of air-to-air combat was simulated in the TAWDS program. The excursions of the attacker aircraft did not effectively cover the operational flight envelope of the F-16 aircraft during the 15 second encounters. It is therefore recommended that more extensive flight envelopes be considered.

Pilot Model Validation. The analytical pursuit pilot model used in this thesis was based on actual pilot performance data during target tracking tasks. It was not the objective of this study to verify that the pilot model used closely matched that of the actual F-16 pilot. Instead, it was used to complete a closed loop study and provide consistent tracking performance for the different flight control configurations and target maneuvers. If it is required to closely match the actual pilot responses for future F-16

simulations, a detailed study of the pilot model is recommended. Radical departures from the present configuration would indicate the need for a pilot adaptation study.

Improve Software Programs. In this study, the EASY Model Generation and Analysis program was used to model and analyze the present flight control configuration of the F-16 aircraft and develop a pitch rate implementation to improve target tracking. The TAWDS program was used extensively as a simulation evaluation tool. However, it was necessary to master the programming techniques and terminology of both programs. Although both programs provided beneficial results, it would be very convenient for portions of each program to be combined in one compact program. The EASY program allowed extensive analysis techniques to be employed by simply manipulating parameter values and state conditions through program commands. Both frequency domain and time domain analysis was readily available. The many subroutines of the TAWDS program allowed implementation of many of the considerations for air-to-air combat. The generic quality of the TAWDS Input subroutine allowed configuration changes and system specifications by simply manipulating data values. By combining the benefits of each of these programs, a very large reduction in the time and

90

effort required to learn both programming techniques could be achieved. This would also enable the user to develop a greater expertise by using only one program. In particular, it is my recommendation that the frequency response and time response techniques be included in the TAWDS programming. In this manner, a complete program package could be maintained so that the programmer could readily analyze his implemented system and complete time simulations to determine system effectiveness. A reduction in computer memory presently required to run both the EASY and TAWDS programs would significantly reduce the operating costs and improve program turnaround time.

Apply Techniques. The programming techniques of this thesis in implementing a pitch rate control system for the F-16 aircraft clearly indicate that digital simulations can provide a very cost effective approach for designing, developing, and optimizing advanced aircraft weapon delivery systems. Used in conjunction with manned simulation efforts, the digital simulation approach can provide invaluable information. It is therefore my final recommendation that both the EASY and TAWDS programming techniques be considered to aid in the design of fighter aircraft handling qualitites specifications as set forth by MIL-F-8785B.

Bibliography

1. General Electric Aircraft Equipment Division. <u>Definition and Preliminary Evaluation of Integrated Automatic Flight and Fire Control Systems</u> (<u>Fire Fly I & II</u>). Binghamton, New York: March 1975.

2. Quinlivan, R.P. <u>Multimode Flight Control Definition Study</u>. AFFDL-TR-72-55. Wright-Patterson Air Force Base, Ohio: Air Force Flight Dynamics Laboratory, May 1972.

3. Sutherland, Major J.P. (CAF) "Fly-by-Wire Flight Control Systems." Technical Paper Prepared for Agard Meeting, Oslo, Norway. Wright-Patterson Air Force Base, Ohio: Air Force Flight Dynamics Laboratory, September 1968.

4. Berger, J.B.; R.P. Meyer; and D.B. Groll. <u>Flight Control Requirements for Weapon Delivery Volume I - Development of the Terminal Aerial Weapon Delivery Simulation</u> (<u>TAWDS</u>) <u>Programs and Their Use in Formulating Flying Qualities Guidelines for Manually Coupled Aircraft Weapon Delivery Systems</u>. AFFDL-TR-76-35, Volume I. Wright-Patterson Air Force Base, Ohio: Air Force Flight Dynamics Laboratory, March 1976.

5. General Dynamics Fort Worth Division. <u>F-16 Flight Control System Analysis Report</u>. CDRL Seq #A02H. Fort Worth, Texas: January 1976.

6. Griffin, John M. <u>Digital Computer Solution of Aircraft Longitudinal and Lateral-Directional Dynamic Characteristics</u>. SEG-TR-66-52. Wright-Patterson Air Force Base, Ohio: Aeronautical Systems Division, December 1967.

7. Berger, J.B. and R.P. Meyer. <u>Flight Control Requirements for Weapon Delivery Volume II - Background Information on Development of Pilot Models for Use in Evaluating Manually Coupled Aircraft Weapon Delivery Systems</u>. AFFDL-TR-76-35, Volume II. Wright-Patterson Air Force Base, Ohio: Air Force Flight Dynamics Laboratory, March 1976.

8. Komechak, G.J.; R.E. Stanfield; J.W. Wilson; and J.H. Watson. Integrated Fire/Flight Control Candidate System Definition and Evaluation. ERR-FW-1758. Fort Worth, Texas: General Dynamics Fort Worth Division, December 1976.

9. Burroughs, J.D. Application of the EASY Dynamic Analysis Program to Aircraft Modelling User's Manual. Seattle, Washington: Boeing Computer Services, Inc., November 1976.

10. General Dynamics Fort Worth Division. F-16 Flight Control Design Analysis Report. CDRL Seq #A01W. Fort Worth, Texas: July 1976.

11. ------. F-16 Flying Qualities Report. CDRL Seq #A02H. Fort Worth, Texas: March 1976.

12. Etkin, Bernard. Dynamics of Flight: Stability and Control. New York: John Wiley and Sons, Inc., 1959.

13. McRuer, Duane; Irving Ashkenas; and Dunstan Graham. Aircraft Dynamics and Automatic Control. Princeton, New Jersey: The Princeton University Press, 1973.

14. D'Azzo, John J. and Constantine H. Houpis. Linear Control System Analysis and Design: Conventional and Modern. New York: McGraw-Hill Book Company, 1975.

15. Berger, J.B. Flight Control Requirements for Weapon Delivery User's Manual: Volume II - Air-to-Air Terminal Aerial Weapon Delivery Simulation Computer Program. MDC-A4089, Vol. II. Saint Louis, Missouri: McDonnell Aircraft Company, March 1976.

16. General Dynamics Fort Worth Division. F-16 Stability and Control Substantiation Report. CDRL Seq #A025. Fort Worth, Texas: January 1976 and August 1976.

Appendix A
EASY Model Program Description
and Computer Generated Schematic

Included in Appendix A is a description of the EASY

model program developed to simulate the F-16 control system,

pilot model, and aircraft equations of motion.

The model description is shown on page 95. The block

diagram location of each standard component of the model

description is specified along with the EASY name of each

component. Also shown are the inputs of each component to

specify the system interconnections.

The computer generated block diagram is shown on pages

96 through 101. The block diagram verifies the component

locations and interconnections of the system as specified

by the model description commands.

```
MODEL DESCRIPTION  F-16 LONGITUDINAL FLT CONTROL SYSTEM
LOCATION 074  AV    INPUT  = SD
LOCATION 540  SAF2  INPUTS = LGF1
LOCATION 022  LO    INPUTS = AV,SAF2(K=ELE)
LOCATION 029  SD    INPUTS = LO   (WO=X)
LOCATION 044  MCF1  INPUTS = AV  (EW=X),LO  (WO=X)
LOCATION 112  MAPL  INPUTS = SD  (PIT=X)
LOCATION 114  LFPL  INPUTS = MAPL
LOCATION 143  LAPL  INPUTS = MAPL
LOCATION 117  SFPL  INPUTS = LFPL
LOCATION 155  TFPL  INPUTS = LAPL
LOCATION 147  MCPL  INPUTS = SFPL,LAPL,TFPL
LOCATION 149  LGPL  INPUTS = MCPL
LOCATION 212  FUF1  INPUTS = LGPL
LOCATION 245  FUF2  INPUTS = AV  (OC=X)
LOCATION 216  SAF2  INPUTS = FUE1,FUE2(K=C6)
LOCATION 213  LGF2  INPUTS = SAF2
LOCATION 470  FUF3  INPUTS = AV  (CL=Y)
LOCATION 450  LGF1  INPUTS = SAF3
LOCATION 302  LEE2  INPUTS = SD  (O=X)
LOCATION 345  FUER  INPUTS = AV  (OC=Y)
LOCATION 322  MCF1  INPUTS = FUE3,LEF2(X=C1),LGE1
LOCATION 325  MCF2  INPUTS = FUE3,-EE2(X=C1),LGE1
LOCATION 328  SAF4  INPUTS = MCF2
LOCATION 308  MCF3  INPUTS = SAF4,LEE2,MCF1
LOCATION 332  SAF5  INPUTS = MCF1
LOCATION 310  LEF3  INPUTS = MCF3
LOCATION 379  MCF4  INPUTS = SAF5,-EF3,LGE2
LOCATION 402  FUF4  INPUTS = AV  (OC=Y)
LOCATION 410  MAF2  INPUTS = AV  (OC=X)
LOCATION 420  FUF5  INPUTS = MAE2
LOCATION 438  MAF3  INPUTS = FUF5,-GE1(X=C1),FUF4,MCE4(X=C2)
LOCATION 454  FUF5  INPUTS = ITE1,MCE5(X=C2)
LOCATION 472  MCE5  INPUTS = MAF3
LOCATION 434  ITF1  INPUTS = FUF4,MCE+(X=C1),FUE6
LOCATION 435  MAF+  INPUTS = MCE5
LOCATION 512  TFF1  INPUTS = ITE1,MCF5(X=C2)
LOCATION 515  MAF3  INPUTS = MAE4
LOCATION 518  SAF1  INPUTS = LGE1,TFF1(X=C2)
LOCATION 578  LGF1  INPUTS = MAF3
                    INPUTS = SAF1
END OF MODEL
PRINT
```

F-16 LONGITUDINAL FLT CONTROL SYSTEM

F-16 DIGITAL FLY CONTROL SYSTEM

```
101     102     103     104     105     106     107     108     109     110

111     112     113     114     115     116     117     118     119     120
        MAPL           LFPL           SAPL
        112            114     X2 LEPL 117

121     122     123     124     125     126     127     128     129     130

131     132     133     134     135     136     137     138     139     140

141     142     143     144     145     146     147     148     149     150
                LAPL                           MCPL           LCPL
                143                            147            147
                X2 SAPL                 X6 MCPL

151     152     153     154     155     156     157     158     159     160
                        TFPL
                        155
                X2 LAPL

161     162     163     164     165     166     167     168     169     170

171     172     173     174     175     176     177     178     179     180
```

97

F-16 LONGTUDINAL FLT CONTROL SYSTEM

```
201   202      203   204   205   206      207   208   209      210

          ┌·······┐                 ┌·······┐          ┌·······┐
          ·FUE1   ·                 ·SAE2   ·          ·LGE2   ·
          ·212    ·                 ·216    ·          ·219    ·
          └·······┘                 └·······┘          └·······┘
                    X2 FUE1          X2 SAE2
211   ·····/         <·············································· 220
    ·PAGE 1·
    ·····
   X2 LGPL

211   222      223   224   225   226      227   228   229      230
                        X2 FUE2 ┤
                        A

231   232      233   234   235   236 I    237   238   239      240
                              216 I
                                  I
                              216 I

241   242      243   244   245   246      247   248   249      250
                         ┌·······┐
                         ·FUE2   ·
                         ·246    ·
                    ···· └·······┘
                   ·PAGE 0·
                    ·····
                    X2 AV

251   252      253   254   256      256   257   258   259      260

261   262      263   264   265   266      267   268   269      270

271   272      273   274   275   276      277   278   279      280
```

F-16 LONGITUDINAL FLY CONTROL SYSTEM

F-16 LONGITUDINAL FLY CONTROL SYSTEM

F-16 LONGITUDINAL FLT CONTROL SYSTEM

```
501      502      503      504      505      506      507      508      509      510

511      512      513      514      515      516      517      518      519      520
         TFF1              X2 TFF1  MAF3                       SAF1
         512                        513                        513

521      522      523      524      525      526      527      528      529      530
                                            X2 LGF1                     X2 SAF1

531      532      533      534      535      536      537      538      539      540
                                                              LGF1              SAF2
                                                              538               540

541      542      543      544      545      546      547      548      549      550

551      552      553      554      555      556      557      558      559      560

561      562      563      564      565      566      567      568      569      570

571      572      573      574      575      576      577      578      579      580
```

X2 M1E4

Appendix B
Baseline Data for the F-16 Aircraft Simulation

A portion of the computer output of Run #43 of the
Griffin program is shown as Appendix B. The stability axis
derivatives were used as the test case for the F-16 aircraft
simulation.

Units of the stability derivatives are given as per
degree. However, it should be noted that this applies only
to the dynamic derivatives that are functions of primary con-
trol surface deflections. Static derivatives were determined
to be given in radian measure.

Roots of the longitudinal characteristic equation are
shown along with the elevator numerator characteristics that
were used to validate the dynamics of the F-16 aircraft model.

INPUT DATA (STABILITY AXIS DERIVATIVES), PER DEG.

S = 3.000E 02	MAC = 1.172E 01	MACH = 4.000E-01	U = 4.295E 02	RHO = 1.2472E-03	G = 3.210E 01
ZLT = 1.000E 04	LYY = 4.995E 04	ZT = 0.0000E 00	LX = 0.0000E 00	TDT = 0.0000E 00	XL = 0.0000E 00
CL = 1.442E-01	PLA = 4.262E-02	CLAD = -1.151E-02	CLQ = 4.531E-02	CLDE = 4.7012E-03	CLM = 1.5184E-01
CD = 2.522E-02	CDL = 2.864E-03	CDAD = 0.0000E 00	CDQ = 0.0000E 00	CDDE = -9.1552E-04	CDM = -1.7547E-02
CMT = 0.0000E 00	CML = 1.644E-01	CMAD = -1.644E-02	CMQ = -4.046E-02	CMDE = -4.046E-02	CMM = -3.6163E-02
ALPHA = 2.163E 00	GAMA = 0.0000E 00				

DIMENSIONAL STABILITY DERIVATIVES

ZU = -0.1722E-01	ZU = -0.1092E 00	MU = -0.1634E-02	
ZA = -0.5344E-02	ZA = -0.1266E 01	MA = -0.3370E-02	
YB = 0.0000E 00	ZAD = -0.1921E-02	MAD = -0.2122E-03	
XD = 0.0000E 00	ZQ = -0.1516E 01	MQ = -0.4646E 00	
XU = 0.1192E 03	PF = -0.1702E 02	MD = -0.1974E 00	
YE = 0.4662E 03	G = 0.1701E 02	GAMA = 0.0000E 00	
YX = 0.6116E 01	LA = 0.1295E 01	NZA = 0.3315E 02	

LAT AXIS DERIVATIVES

U = -0.1444E-01	ZU = -0.6476E-01	MU = -0.1157E-02	
YA = -0.2444E-02	ZA = -0.1925E 02	MA = -0.3324E-02	
YB = -0.2445E-04	ZAD = -0.1101E-02	MAD = -0.3224E-03	
XD = -0.1427E 00	ZQ = -0.7015E 01	MQ = -0.4646E 00	
BD = 0.1614E 02	ZD = -0.1207E 02	MD = -0.1974E 00	
YD = 0.4000E 03	G = 0.2720E 02	GAMA = 0.0000E 00	
YX = 0.3527E 01	LA = 0.1295E 01	NZA = 0.3315E 02	
YX = 0.6916E 01			

THE CHARACTERISTICS OF THE LONGITUDINAL DENOMINATOR ARE

ROOTS (COMPLEX FROM)

-0.2423E 00   0.0000E 00
-0.2852E-01   0.1526E 00
-0.2452E-01   -0.1526E 00
-0.2745E 01   0.2726E-24

PSP = 0.1733E 00   WSP = 0.1551E 00 RAD/SEC   1/TP1 = 0.82424E 00   1/TP2 = -0.27450E 01
                    = 0.2463E-01 CYCLES/SEC

PHUGIOD MODE

PERIOD = 0.4110E 02   TIME TO HALF AMP. = 0.2413E 02   TIME TO ONE TENTH AMP. = 0.4602E 02
                       CYCLES TO HALF AMP. = 0.6357E 00   CYCLES TO ONE TENTH AMP. = 0.2111E 01
                       ONE OVER CYCLES TO HALF AMP. = 0.1573E 01   ONE OVER CYCLES TO ONE TENTH AMP. = 0.4735E 00
PSP = 0.1733E 00   WSP = 0.5305E-01   WSQ = 0.2406E-01
                    WN/LA = 0.1202E 00   LA/WN = 0.8271E 01

ELEVATOR NUMERATOR CHARACTERISTICS

THETA PER DELTA ELEVATOR
ROOTS (COMPLEX FROM)

VERTICAL VELOCITY PER DELTA ELEVATOR

ALTITUDE PER DELTA ELEVATOR
ROOTS (COMPLEX FROM)

VERTICAL VELOCITY PER DELTA ELEVATOR
ROOTS (COMPLEX FROM)

Appendix C
TAWDS Programming Details

Included as Appendix C is the Terminal Aerial Weapon Delivery Simulation program data, program output, and additional program statements.

The extensive data list required for the program operation is shown on pages 106 through 114. Pages 106 through 108 lists the input data required. The stability derivative requirements for the non-linear, six-degree-of-freedom simulation are shown on pages 109 through 114.

The TAWDS output of encounter 8 for the present F-16 flight control system is shown on pages 115 through 129. Pages 130 through 145 show the program output of the same encounter with the pitch rate control configuration.

The Appendix is concluded with a listing of the program statements required to adapt the generic TAWDS program for an F-16 aircraft simulation, pages 146 through 154. The programmed target rates are shown on page 146 along with the target maneuvers of page 147. The control statements added to program the F-16 flight control system begin on page 147. Included are the logic statements for the gain scheduled parameters of the flight control system that are functions of static and dynamic pressure.

```
BEGIN****CNTRL
MERGE                    0
ENDSET**
BEGIN****NAMINT
INITTIME      1   1  10.
FINTIME       1   1  115.1
CUTTOL        1   1   1        1.E-4
UPERROR       1   1   1        1.E-4
LOERROR       1   1   1        1.E-6
MAXSTEP       1   1  1.05
STEPVAR       1
STEPFACT      0
ENDSET
BEGIN****NAMCN1
ACCDEGVY                 32.174
MASS                     590.5
COPDLGTH                 11.32
MACHCNST                 829.
WINGAREA                 300.
XXDYADIC                 9007.5
XZDYADIC                 198.
YYDYADIC                 +9956.
ZZDYADIC                 56770.
NACCAXIS                 0.
WATERANG                 0.
THMOMARM                 .333
WINGSPAN                 31.
THANG                    0.
MAXTH                    25000.
XLATACPH                 12.58
YLATACPH                 0.
ZLATACPH                 .5
XGYROPOS                 18.24
YGYROPOS                 0.
ZGYROPOS                 -.95
XNOMACPH                 12.8
YNOMACPH                 0.
ZNOMACPH                 .42
SENDEGVY                 .35
CENDEGVY                 .35
PILOTLOC                 15.           0.           +3.75
GYRORANG                 0.
MANLOCON                 0.
IMSTAB                   1.
NIC                      3.
ATTERVEL                 829.5
ALTITUDE                 20000.
ATTPOSX                  0.0
ATTPOSY                  0.0
ATTPOSZ                  -20000.
RLSI                     5300.
RDOTI                    -100.
ELVERR                   10.0
```

106

```
TRAERP                    10.0
LOCONIND                  1.
BULCON                    .00614
SGHTFACT                  .4
BWHT                      0.
OAMP                      0.
SWYAW                     0.
DHF                       2250.
MPLEVEL                   3400.
OGMARA          1   3     5.58        -2.21        0.
OGTARA          1   3     10.8        -2.21        0.
GN1ELANG                  .5
GN1AZ4TH                  0.
FTGUN           1   5     0.          0.           0.        .05       1500.
FTGUN           5  10     .1          2800.        .3        2800.     .5
GUNFORI                   1500.
GUNFORSS                  2900.
RTIMGUN                   .05
UPRNKLM                   100.
LORNKLM                   -100.
UPPERG                    500.
LOWERG                    -500.
DZEDOT                    .001
DZBRNK                    0.0
GKPHI                     3.283
RCONV                     0.
CBEL1           1   2     0.          1.
CCEL1           1   2     1.          .05
CBEL2           1   2     .125        0.
CCEL2           1   2     1.          .05
CBEL3           1   3     1.          0.           0.
CCEL3           1   3     1.          1.2          1.
CBRNK           1   2     0.          1.
CCRNK           1   2     1.          .05
CBRAN           1   2     1.5         0.
CCRAN           1   2     1.          .05
SCONT           1   2     .250        .250
ARANGE          1   2     0.          1000000.
NPLS                      2.
BCONT           1   2     .1          .1
BELVERG         1   2     -100.       100.
NELV1                     2.
DZTDOTT         1   2     0.0         0.0
BELVERD         1   2     -100.       100.
NELV2                     2.
IPERF                     1.
IMC                       0.
IPRESP                    0.
NRUN                      1.
DTF                       .05
IRANDOM01                 11.
OMC                       6.
OTH3                      6.
LGST                      1750.
```

107

```
SOV                    4.7
SOALF                  .003
SOBET                  .004
SOH                    100.
SOPLS                  30.
SORDOT                 0.
SOV4                   50.
SOTGL                  .0015
SOEGL                  .0015
SOTHD                  .001
SOEHD                  .001
SOLSPT                 .01
SOLSRE                 .01
ELVCPI                 100.
TRACPI                 100.
PADCPI                 100.
CASTIDES               1.
PRINTIND               7.
ENDSET**
BEGINS**NAMONS
GKNL2                  30.1
GKNL1                  2.175
CKMECH                 1.0
CBSE        1   2      1.25        0.0
CCSE        1   2      1.0         0.12
GK6                    5.0
TPFACTOR               0.5
CKF                    0.3
CBCOML      1   3      1.0         0.1333     0.0
CCCOML      1   3      1.0         0.0667     0.0
CSLU                   25.0
CSLL                   -25.0
CBSTAR      1   2      1.0         0.0
CCSTAR      1   2      1.0         0.05
CKNZ2                  0.0
CKNZ3                  0.5
CKNZ1                  0.5075
CBNZ        1   2      1.0         0.0
CCNZ        1   2      1.0         0.1
CBOO        1   2      1.0         0.0
CCOO        1   2      1.0         0.0
CKFB                   0.161
DSHI                   25.0
CSLO                   -25.0
CBRE        1   2      1.0         0.0
CCPE        1   2      1.0         0.1
FAHI                   20.0
DALO                   -23.0
CBNY        1   2      0.0         1.5
CCNY        1   2      1.0         1.0
CBYR        1   2      1.0         .20
CCYR        1   2      1.0         .0667
FUD4I                  30.0
FUDLO                  -30.0
```

```
ENDSET**
BEGIN***NAMT81
NADRAGSC      10
ADRAGSC       1  5    0.0      4.       8.       10.      12.
ADRAGSC       6 10   14.      16.      20.       24.      28.
NMDRAGSC      2
MDRAGSC       1  2    .8       .9
DRAGSC        1  5    .0194    .0207    .0313    .0362    .0725
DRAGSC        6 10    .0918    .1077    .1286    .1517    .1677
DRAGSC       11 15    .2029    .2209    .2619    .2755    .4116
DRAGSC       13 16    .4309    .5862    .6054    .7649    .8150
NALFTST3      10
ALFTST3       1  5    0.       4.       8.       10.      12.
ALFTST3       6 10   14.      16.      20.       24.      28.
NMLFTST3      2
MLFTST3       1  2    .8       .9
LFTSTRSC      1  5   -.02     -.0005    .3285    .3715    .6803
LFTSTRSC      5 10    .7471    .8223    .8638    .9458    .9845
LFTSTRSC     11 15   1.0721   1.0838   1.1632   1.1797   1.3322
LFTSTRSC     15 20   1.3939   1.5652   1.6103   1.7166   1.7644
NAPCHMOM      10
APCHMOM       1  5    0.       4.       8.       10.      12.
APCHMOM       5 10   14.      16.      20.       24.      28.
NMPCHMOM      2
MPCHMOM       1  2    .8       .9
PCHMOMC       1  5   -.0235   -.0302   -.0193   -.0244   -.0193
PCHMOMC       5 10   -.0425   -.0233   -.0454   -.03     -.0592
PCHMOMC      11 15   -.0407   -.0855   -.0537   -.0975   -.0865
PCHMOMC      15 20   -.1419   -.1132   -.1743   -.1152   -.1957
NADSSA        .5
ADSSA         1  6    0.       4.      19.      25.      27.      30.
NMDSSA        2
MDSSA         1  2    .8       .9
NBDSSA        2
BDSSA         1  2    0.       4.
DSSLPANG      1  6    0.      -.072     0.      -.074     0.      -.068
DSSLPANG      7 12    0.      -.066     0.      -.064     0.      -.064
DSSLPANG     13 18    0.      -.05      0.      -.044     0.      -.05
DSSLPANG     19 24    0.      -.044     0.      -.058     0.      -.054
NADYSA        5
ADYSA         1  6    0.      10.      16.      20.      25.      30.
NMDYSA        2
MDYSA         1  2    .8       .9
NBDYSA        2
BDYSA         1  2    0.       4.
DYSLPANG      1  6    0.       .0108    0.       .011     0.       .0124
DYSLPANG      7 12    0.       .0112    0.       .0124    0.       .0096
DYSLPANG     13 18    0.       .0108    0.       .0108    0.       .0062
DYSLPANG     13 24    0.       .0044    0.       .0012    0.       .0016
NADRSA        5
ADRSA         1  4    0.       3.       6.      11.
ADRSA         5  8   15.      20.      26.      30.
NMDRSA        2
MDRSA         1  2    .8       .9
```

109

NDPSA	2						
EDPSA	1 2	0.	4.				
DPSLPANG	1 6	0.	-.0068	0.	-.0068	0.	-.0084
DPSLPANG	7 12	0.	-.009	0.	-.0072	0.	-.0098
DPSLPANG	13 18	0.	-.006	0.	-.0080	0.	-.0034
DPSLPANG	19 24	0.	-.0074	0.	-.0090	0.	-.0076
DPSLPANG	25 30	0.	-.005	0.	-.0136	0.	-.007
DPSLPANG	31 32	0.	-.014				
NADSPD	5						
ADSPD	1 6	0.	3.	5.	17.	24.	30.
NMDSPD	2						
MDSPD	1 2	.8	.9				
NBDSPD	2						
BDSPD	1 2	0.	1.				
DSRUDDEL	1 6	.0033	.0033	.0029	.0029	.0032	.0032
DSRUDDEL	7 12	.0029	.0029	.00285	.00285	.00295	.00295
DSRUDDEL	13 18	.0021	.0021	.0012	.0012	.0031	.0031
DSRUDDEL	19 24	.0022	.0022	.0026	.0026	.0024	.0024
NADYRD	5						
ADYRD	1 5	0.	6.	20.	25.	30.	
NROYRD	2						
ROYRD	1 2	-30.	30.				
NMDYRD	2						
MDYRD	1 2	.8	.9				
NBDYRD	2						
BDYRD	1 2	-30.	30.				
DYRUDDEL	1 5	-.00165	-.00165	-.0015	-.0015	-.00165	
DYRUDDEL	5 10	-.00165	-.0015	-.0015	-.0016	-.0015	
DYRUDDEL	11 15	-.0015	-.0015	-.0016	-.0016	-.0015	
DYRUDDEL	15 20	-.0015	-.00155	-.00155	-.00125	-.00125	
DYRUDDEL	21 25	-.00155	-.00155	-.00125	-.00125	-.0015	
DYRUDDEL	26 30	-.0016	-.00115	-.00115	-.0016	-.0015	
DYRUDDEL	31 35	-.00115	-.00115	-.001	-.001	-.00095	
DYRUDDEL	36 40	-.00095	-.001	-.001	-.00095	-.00095	
NADRD	5						
ADRD	1 6	0.	4.	10.	20.	25.	30.
NRODRD	2						
RODRD	1 2	-30.	30.				
NMDRD	2						
MDRD	1 2	.8	.9				
NBDRD	2						
BDRD	1 2	-30.	30.				
DRRUDDEL	1 6	.0006	.0006	.0006	.0006	.0006	.0006
DRRUDDEL	7 12	.0006	.0006	.00035	.00035	.00035	.00035
DRRUDDEL	13 18	.00035	.00035	.00035	.00035	.0002	.0002
DRRUDDEL	19 24	0.	0.	.0002	.0002	0.	0.
DRRUDDEL	25 30	-.0001	-.0001	-.00005	-.00005	-.0001	-.0001
DRRUDDEL	31 36	-.00005	-.00005	-.0004	-.0004	-.00045	-.00045
DRRUDDEL	37 42	-.0004	-.0004	-.00045	-.00045	-.0003	-.0003
DRRUDDEL	43 48	-.00035	-.00035	-.0003	-.0003	-.00035	-.00035
NADSAD	4						
ADSAD	1 4	0.	5.	22.	30.		
NSDSAD	2						
SDSAD	1 2	-30.	30.				

110

```
NMDSAD       2
MDSAD        1  2   .8        .9
DSAILDFL     1  4   .0004     .0004     .0004     .0004
DSAILDFL     5  8   .0003     .0003     .0003     .0003
DSAILDFL     9 12   -.0004    -.0004    -.0004    -.0004
DSAILDFL    13 15   -.0012    -.0008    -.0012    -.0008
NADYAD       5
ADYAD        1  5   0.        11.       15.       25.       30.
NSDYAD       2
SDYAD        1  2   -30.      30.
NMDYAD       2
MDYAD        1  2   .8        .9
DYAILDFL     1  5   -.00025   -.00025   -.00025   -.00025   .000245
DYAILDFL     5 10   .00015    .000245   .00015    .0003     .00015
DYAILDFL    11 15   .0003     .00015    .0007     .0006     .0007
DYAILDFL    15 20   .0006     .0007     .00035    .0007     .00035
NADPAD       5
ADPAD        1  6   0.        7.        16.       21.       25.       30.
NSDPAD       2
SDPAD        1  2   -30.      30.
NMDPAD       2
MDPAD        1  2   .8        .9
DPAILDFL     1  6   -.00155   -.0014    -.00155   -.0014    -.0016    -.00145
DPAILDFL     7 12   -.0016    -.00145   -.00105   -.0009    -.00105   -.0009
DPAILDFL    13 18   -.0012    -.00085   -.0012    -.00085   -.001     -.00065
DPAILDFL    19 24   -.001     -.00065   -.0004    -.00015   -.0004    -.00015
NADSDFT      5
ADSDFT       1  6   0.        4.        8.        18.       24.       30.
NSDSDFT      2
SDSDFT       1  2   -30.      30.
NMDSDFT      2
MDSDFT       1  2   .8        .9
DSDIFFT      1  6   .0019     .00165    .0019     .00165    .0019     .0017
DSDIFFT      7 12   .0019     .0017     .0017     .0014     .0017     .0014
DSDIFFT     13 18   .0012     .0004     .0012     .0004     .0008     .0005
DSDIFFT     19 24   .00008    .0005     .0007     .0002     .0007     .0002
NADYDFT      4
ADYDFT       1  4   0.        18.       24.       30.
NSDYDFT      2
SDYDFT       1  2   -30.      30.
NMDYDFT      2
MDYDFT       1  2   .8        .9
DYDIFFT      1  4   -.001     -.0009    -.001     -.0009
DYDIFFT      5  8   -.0001    .0001     -.0001    .0001
DYDIFFT      9 12   .0002     .0003     .0002     .0003
DYDIFFT     13 16   .0005     .00055    .0005     .00055
NADPDFT      7
ADPDFT       1  4   0.        5.        10.       18.
ADPDFT       5  7   20.       23.       30.
NSDPDFT      2
SDPDFT       1  2   -30.      30.
NMDPDFT      2
MDPDFT       1  2   .8        .9
DPDIFFT      1  4   -.0015    -.0014    -.0015    -.0014
```

```
ORDIFFT    5  8   -.0016    -.00145    -.0016     -.00145
ORDIFFT    9 12   -.00135   -.00155    -.00135    -.00155
ORDIFFT   13 16   -.00135   -.00105    -.00135    -.00105
ORDIFFT   17 20   -.00155   -.00105    -.00155    -.00105
ORDIFFT   21 24   -.0012    -.0009     -.0012     -.0009
ORDIFFT   25 28    .001      .0006      .001       .0006
NMDPCHP    2
MDPCHP     1  2    .8        .9
DPCHPCH    1  2   -2.25     -2.3
NMDPCHA    2
MDPCHA     1  2    .8        .9
DPCHANG    1  2   -.94      -1.3
NADRVL     5
ADRVL      1  5    0.        6.        13.        19.        30.
NMDRVL     2
MDRVL      1  2    .8        .9
ERROLVEL   1  5   -.29      -.35       -.295      -.345      -.225
EROOLVEL   5 10   -.225     -.245      -.315      -.15       -.215
NADRYV     5
ADRYV      1  5    0.        6.        14.        24.        30.
NMDRYV     2
MDRYV      1  2    .8        .9
DRYAWVEL   1  5   -.05      -.05        .1         .16        .175
DRYAWVEL   5 10    .27       .4         .4         .42        .51
NADYPL     5
ADYPL      1  6    0.        5.         8.        13.        22.       30.
NMDYPL     2
MDYPL      1  2    .8        .9
CYROLVEL   1  6    .004      .002      -.024      -.02       -.024     -.013
CYPOLVEL   7 12    .004      .004       .06        .048       .055      .074
NADYYV     6
ADYYV      1  6    0.        6.        16.        20.        25.       30.
NMDYYV     2
MDYYV      1  2    .8        .9
CYYAWVEL   1  5   -.12      -.1        -.18       -.225      -.26      -.22
CYYAWVEL   7 12   -.255     -.26       -.275      -.26       -.15      -.185
NMDSSO     2
MDSSO      1  2    .8        .9
DSSTODEL   1  2   -.43      -.43
NMDPCHS    2
MDPCHS     1  2    .8        .9
DPCHSTR    1  2   -.659     -.659
NADSPV     7
ADSPV      1  5   -100000.0 -6.0        6.0       12.0       16.0
ADSPV      5  7    28.0      100000.0
NMDSPV     2
MDSPV      1  2    .8        .9
DSROLVEL   1  6   -.18      -.15       -.18       -.15        .18       .15
DSROLVEL   7 12    .15       .12        .07        .1         .07       .02
DSPOLVEL  13 14    .07       .02
NADSYV     2
ADSYV      1  2   -30.       30.0
NMDSYV     2
MDSYV      1  2    0.0       20.0
```

OSYAWVEL	1	4	0.0	0.0	0.0	0.0	
NNOPER	2						
MORER	1	2	-30.0	30.0			
DREXPAT	1	2	0.0	0.0			
NMOYER	2						
MOYER	1	2	-30.0	30.0			
DYEXPAT	1	2	0.0	0.0			
NMOSER	2						
MOSER	1	2	-30.0	30.0			
DSEXPAT	1	2	0.0	0.0			
NMDRTE	2						
MORTE	1	2	-30.0	30.0			
NSORTE	2						
SORTE	1	2	-30.0	30.0			
NADRTE	2						
ADRTE	1	2	-30.0	30.0			
ORTFLEX	1	6	0.0	0.0	0.0	0.0	0.0	0.0
ORTFLEX	7	8	0.0	0.0			
NMOYTE	2						
MOYTE	1	2	-30.0	30.0			
NSOYTE	2						
SOYTE	1	2	-30.0	30.0			
NADYTE	2						
ADYTE	1	2	-30.0	30.0			
OYTFLEX	1	6	0.0	0.0	0.0	0.0	0.0	0.0
OYTFLEX	7	8	0.0	0.0			
NMOSTE	2						
MOSTE	1	2	-30.0	30.0			
NSOSTE	2						
SOSTE	1	2	-30.0	30.0			
NADSTE	2						
ADSTE	1	2	-30.0	30.0			
OSTFLEX	1	6	0.0	0.0	0.0	0.0	0.0	0.0
OSTFLEX	7	8	0.0	0.0			
NADLA	2		2				
MOLA	1	2	-30.0	30.0			
DLFTANG	1	2	0.0	0.0			
NCORSA	2						
CORSA	1	2	-30.0	30.0			
DRSACAN	1	2	0.0	0.0			
NCOYSA	2						
COYSA	1	2	-30.0	30.0			
OYSACAN	1	2	0.0	0.0			
NCOSSA	2						
COSSA	1	2	-30.0	30.0			
DSSACAN	1	2	0.0	0.0			
NCLFT	2						
CLFT	1	2	-30.0	30.0			
LFTCAN	1	2	0.0	0.0			
NCDRAG	2						
CDRAG	1	2	-30.0	30.0			
DRAGCAN	1	2	0.0	0.0			
NCPCHM	2						
CPCHM	1	2	-30.0	30.0			

```
DPCHMCAN    1   2   0.0        0.0
NCPCHP      2
CPCHP       1   2   -30.0      30.0
DPCHPCAN    1   2   0.0        0.0
NMDRPDF     2
HDRRDF      1   2   -30.0      30.0
DRRDFLEX    1   2   1.0        1.0
NMDYRDF     2
MDYRDF      1   2   -30.0      30.0
DYPDFLEX    1   2   1.0        1.0
NMDSRDF     2
MDSRDF      1   2   -30.0      30.0
DSPDFLEX    1   2   1.0        1.0
NMDLP       2
MDLP        1   2   -30.       30.0
DLETDCH     1   2   0.         0.
NMDYTF      2
MDYTF       1   2   -30.       30.
NSDYTF      2
SDYTF       1   2   -30.       30.
NMDYTF      2
ADYTF       1   2   -30.       30.
DYTFLEX     1   7
DYTFLEX     7   8
NATPALT     25
AIPALT      1   6   0.         2000.     4000.     6000.     8000.     10000.
AIRALT      7   12  12000.     14000.    16000.    18000.    20000.    22000.
AIRALT      13  18  24000.     26000.    28000.    30000.    32000.    34000.
AIRALT      19  24  36000.     38000.    40000.    42000.    44000.    46000.
AIRALT      25  26  48000.     50000.
AIRDNTY     1   6   .00238     .00224    .00211    .00199    .00187    .00176
AIRDNTY     7   12  .00165     .00155    .00145    .00135    .00127    .00118
AIRDNTY     13  18  .0011      .00103    .000957   .000889   .000825   .000756
AIRDNTY     19  24  .000704    .000640   .000582   .000529   .000481   .000437
AIRDNTY     25  26  .000397    .000361
NMTHMX      2
HTHMX       1   2   .1         1.2
THMX        1   2   12500.     12500.
NMTLGTH     2
MTLGTH      1   2   -30.       30.
TLGTH       1   2   15.87      15.87
ENDSET**
```

114

CASE = 1. ENCOUNTER = 8

TAWOS COMPUTER PROGRAM

// ----- ATTACKER ----- // // ----- TARGET ----- //

TIME SEC	POSITION x FEET	y	z	XDOT FEET/SEC	YDOT	ZDOT	POSITION EARTH COORD x FEET	y	z	AIR SPEED FT/SEC	BODY RATES P DEGREES/SEC	Q	R	R	ALPHA/LOAD DEG	FACTOR G
			-20050.0	827.5	0.0	0.0	7012.2	-75.2	-19788.9	627.63	19.91	5.60	1.93	3.83	1.00
						1.1		-77.5		627.57	14.70	5.49	5.26	5.77	1.41
			-19990.0	829.1		5.5	7421.6	-77.5	-19794.5	625.31	14.72	8.30	7.52	7.75	1.73
						11.5	7470.4	-68.7	-19799.5	625.29	14.00	9.73	9.67	9.71	2.11
			-19976.4	830.4	1.5	17.5	7928.4	-58.1	-19905.3	622.45	42.63	11.29	11.46	11.67	2.40
				830.9	6.1	21.2	8114.7	-39.5	-19912.7	619.41	35.26	12.74	11.77	17.63	2.63
			-19979.0	831.3	14.6	21.0	8318.3	-11.2	-19919.7	613.52	-.76	7.80	2.99	16.75	2.72
			-19991.6	831.5	26.2	21.3	8528.7	27.3	-19922.0	605.82	-.77	7.84	2.91	16.75	2.69
			-19914.0	831.5	40.1	22.4	8735.4	75.8	-19822.3	604.57	-.77	7.90	2.93	16.75	2.66
			-19946.1	830.8	55.3	27.4	8926.4	134.0	-19819.7	600.75	-.78	7.74	2.95	16.75	2.63
			-19977.5	830.0	70.6	25.6	9136.4	201.7	-19814.2	597.37	-.78	7.74	2.97	16.75	2.61
			-19929.0	928.9	85.5	28.9	9337.0	274.6	-19805.6	593.41	-.78	7.70	2.98	16.75	2.59
			-19917.3	827.5	100.3	32.7	9519.7	354.3	-19780.5	591.65	-.79	7.72	2.99	16.75	2.55
			-19925.1	826.1	115.3	35.8	9720.9	450.7	-19780.4	591.58	-.79	7.59	3.00	16.75	2.66
			-19961.5	824.3	120.5	41.0	10001.7	561.5	-19763.5	587.31	-.79	7.67	3.00	16.75	2.55
			-19926.9	822.2	145.5	45.1	10217.4	672.5	-19743.9	586.50	-.79	7.67	3.00	16.75	2.56
			-19900.7	817.1	16i.1	49.7	10476.5	731.7	-19721.5	585.7	-.79	7.56	4.02	16.75	2.53
							10692.3	1051.4		584.78	17.91	8.24	11.51	16.75	2.53
			-19920.5	810.1	52.3	56.0	10593.7	1158.8	-19607.8	585.15	77.65	9.54	11.45	16.75	2.53
			-19920.8	806.9	62.3	65.4	10911.3	1436.6	-19551.0	585.75	32.21	10.18	11.10	16.75	2.60
			-19972.8	802.7	224.7	76.5	11177.6	1645.9	-19503.8	585.25	32.93	10.51	10.66	16.75	2.53
			-19974.7	798.1	256.3	97.1	11038.5	1803.0	-19426.4	530.85	32.95	10.90	1.46	16.75	2.66
			-19663.0	792.8	272.1	112.0	11128.2	1360.6	-19346.5	599.05	-.38	10.76	1.14	16.75	2.53
			-19664.3	786.6	238.2	129.4	11337.5	2117.8	-19325.4	597.63	-.37	10.73	1.12	16.75	2.72
			-19595.0	779.3	304.9	143.1	11413.8	2274.1	-19205.0	602.13	-.37	10.66	1.29	16.75	2.79
			-19917.0	770.3	321.9	170.7	11558.3	2429.0	-19035.3	606.30	-.36	10.64	1.37	16.75	2.93
			-19945.9	761.2	328.5	194.0	11645.5	2041.0	-19030.8	612.13	-.35	10.53	1.34	15.69	2.89
			-19973.7	750.6	354.8	219.2	11716.1	2772.0	-18771.3	617.55	-.36	14.37	1.31	17.05	3.01
			-19922.2	738.5	370.7	246.5	11824.3	2874.4	-18671.5	627.24	-.39	15.11	1.27	16.53	3.16
			-19920.9	725.1	386.2	275.3	11867.2	3021.8	-18405.0	622.33	-.41	15.11	1.23	20.00	3.22
			-19925.6	703.6	401.3	307.1	11934.6	3159.9	-18120.0	634.75	-.43	11.16	1.19	20.00	3.34
			-19945.0	770.3	304.9	341.0	11914.3	3232.6	-17934.6	640.43	-.42	11.06	1.29	20.00	3.45
			-19971.4	761.2	377.5	377.9	11192.7	3418.6	-17741.1	646.41	-.41	11.06	1.16	20.00	3.53
			-19751.0	550.8	415.3	454.0	11916.3	3547.9	-17540.8	652.48	-.40	11.03	1.08	20.00	3.70
			-19400.0	521.9	470.8	590.7	11916.3	3649.6	-17512.0	655.64	-.33	11.28	1.05	20.00	3.79
			-17715.9	409.5	638.4	677.7	11775.0	3998.3	-15586.6	677.17	-.35	10.94	.97	20.00	3.97
			-17574.1	346.9	685.4		11713.1	4073.2	-16464.9	683.20	-.34	10.93	.95	20.00	4.16
			-17326.4	278.6	729.3		11163.62	4127.1	-16241.5	689.45	-.34	10.32	.92	20.00	4.25
							11547.5	4169.6	-16016.4	700.14	-.33	10.91	.90	20.00	4.34

CASE = -1.   ENCOUNTER = 8

TAMOS COMPUTER PROGRAM

ATTACKER VARIABLES

TIME SEC //	PLOT COMMANDS //// LONG LAT DIR ////	STAB ////	SURFACE DEFLECTIONS CANARD AIL DIF-TAIL DEGREES	RUD ////	PSI ////	ATTITUDE ANGLES THETA PHI DEGREES	GAMMA //	MACH //	THRUST LBS

CASE = 1.   ENCOUNTER = 8

TAMDS COMPUTER PROGRAM

BULLET - SIGHT - GEOMETRY VARIABLES.

TIME SEC	TRACKING ERROR TB MR	EL MR	DIRECTOR TF SEC	EL MR	BULLET TF SEC	BULLET RANGE FT	BULLET// TB MR	BULLET EL MR	MISS TB FEET	MISS EL FEET	/// FEET	LEAD ANGLE TB MR	EL MR	//TARGET WRT GUN TB MR	EL MR	RANGE RATE FT/SEC	RANGE FEET
0.20	10.02	10.00	4.76	0.00	0.00	0.	*****	2.00	0.	0.	0.	.7	-91.1	-10.9	-91.1	-202.8	7000.
.25	10.35	5.09	4.62	1.93	1.95	5805.	*****		999.	999.	999.	-.3	-48.2	-11.3	-93.3	-200.6	6972.
.75	5.94	-10.61	4.46	1.95	1.95	5835.	*****		999.	999.	999.	-4.6	-50.2	-11.5	-30.5	-262.2	6859.
1.05	-1.10	-2.05	4.70	1.95	1.95	5835.	*****		999.	999.	999.	-12.6	-53.6	-10.4	-24.8	-205.4	5745.
1.40	-11.52	-2.25	4.13	1.95	1.95	5835.	*****		999.	999.	999.	-22.2	-57.9	-10.4	-27.8	-210.7	5715.
1.75	-22.59	-37.91	3.57	1.95	1.95	5836.	*****		999.	999.	999.	-30.9	-53.4	-8.2	-29.4	-217.3	6641.
2.10	-30.34	-71.72	3.41	1.95	1.95	5836.	*****		999.	999.	999.	-35.5	-71.1	-4.6	-30.6	-226.0	6563.
2.45	-33.63	-72.01	3.65	1.95	1.95	5836.	*****		999.	999.	999.	-36.4	-80.7	-2.7	-48.7	-235.6	6482.
2.80	-32.91	-24.75	3.49	1.95	1.95	5836.	*****		999.	999.	999.	-37.2	-93.2	-4.3	-58.9	-2.56	6393.
3.15	-31.22	-22.35	3.75	1.95	1.95	5836.	*****		999.	999.	999.	-33.2	-95.5	-9.0	-70.6	-265.0	6311.
3.50	-26.20	-17.81	3.21	1.95	1.95	5836.	*****		999.	999.	999.	-41.6	-97.7	-15.4	-79.9	-266.7	5219.
3.85	-21.24	-16.03	3.08	1.95	1.95	5836.	*****		999.	999.	999.	-43.7	-101.5	-22.5	-36.4	-277.7	6124.
4.20	-16.13	-15.71	2.65	1.95	1.95	5835.	*****		999.	999.	999.	-45.8	-99.7	-29.7	-59.7	-289.0	6025.
4.55	-11.47	-17.79	2.82	1.95	1.95	5834.	*****		999.	999.	999.	-47.9	-105.2	-36.4	-34.8	-300.6	5922.
4.90	-7.57	-10.99	2.70	1.95	1.95	5134.	*****		999.	999.	999.	-49.8	-110.9	-42.5	-102.8	-312.3	5815.
5.25	-2.51	-3.15	2.59	1.95	1.95	5837.	*****		999.	999.	999.	-52.3	-113.0	-47.3	-105.9	-324.2	5703.
5.60	-2.24	-2.13	2.48	1.95	1.95	5837.	*****		999.	999.	999.	-54.6	-115.0	-52.6	-99.7	-336.1	5683.
5.95	-.73	-2.72	2.77	1.95	1.95	5832.	*****		999.	999.	999.	-57.0	-116.7	-56.3	-107.9	-3.51	5469.
6.30	-.89	-.72	2.26	2.05	2.05	5331.	*****		999.	999.	999.	-59.2	-117.8	-59.2	-103.9	-360.6	5344.
6.65	-3.54	-5.11	2.16	1.95	1.95	5331.	*****		999.	999.	999.	-60.7	-118.5	-60.0	-112.4	-372.9	5215.
7.00	-4.53	-4.53	2.06	1.95	1.95	5380.	*****		999.	999.	999.	-66.8	-119.7	-53.2	-116.8	-385.1	5083.
7.35	-14.33	-6.13	1.90	1.90	1.90	5769.	-41.59	3.88	-240.	22.	-68.4	-120.9	-53.4	-116.7	-396.4	-947.
7.70	-21.37	-6.42	1.82	1.82	1.82	5193.	-45.47	1.01	-254.	6.	-65.4	-125.1	-44.1	-119.7	-406.1	-4.05.
8.05	-26.23	-9.28	1.78	1.73	1.73	5337.	-46.78	-.96	-252.	-27.	-57.5	-131.5	-31.2	-127.5	-413.7	4663.
8.40	-29.72	-10.46	1.69	1.65	1.65	5210.	-45.52	-10.96	-237.	-57.	-47.5	-130.0	-18.7	-127.1	-420.6	4517.
8.75	-31.00	-15.71	1.61	1.57	1.57	5027.	-43.76	-13.92	-220.	-70.	-40.2	-142.7	-10.2	-171.0	-426.6	4359.
9.10	-31.03	-11.03	1.43	1.50	1.50	4834.	-42.22	-14.79	-204.	-72.	-35.2	-142.7	-4.2	-135.2	-434.5	4214.
9.45	-31.40	-11.80	1.45	1.42	1.42	4645.	-41.03	-15.53	-191.	-72.	-31.6	-143.1	.2	-138.2	-441.4	4065.
9.80	-32.31	-11.85	1.27	1.35	1.35	4264.	-40.27	-16.79	-179.	-75.	-23.1	-151.7	3.7	-139.0	-447.1	3909.
10.15	-34.20	-11.34	1.24	1.27	1.27	4264.	-39.89	-15.25	-170.	-75.	-26.1	-153.3	7.1	-141.0	-454.7	3752.
10.50	-35.57	-11.63	1.22	1.20	1.20	4073.	-39.80	-13.50	-162.	-80.	-24.9	-155.7	10.7	-142.1	-461.5	3592.
10.85	-37.33	-11.19	1.15	1.13	1.13	3831.	-39.98	-21.06	-155.	-82.	-22.9	-159.1	14.2	-142.2	-468.0	3429.
11.20	-33.33	-11.09	1.08	1.06	1.06	3668.	-40.45	-22.77	-149.	-94.	-21.1	-161.4	19.2	-147.2	-473.9	3264.
11.55	-41.33	-21.65	1.11	1.00	1.00	3637.	-41.25	-24.40	-144.	-87.	-17.7	-163.6	22.0	-142.9	-479.7	2300.
11.90	-43.33	-27.89	.64	.93	.93	3331.	-43.74	-27.42	-140.	-91.	-14.3	-165.6	26.0	-141.7	-483.0	2931.
12.25	-47.15	-27.63	.68	.87	.87	3116.	-43.74	-30.38	-136.	-96.	-17.0	-167.5	30.2	-139.9	-483.5	2790.
12.60	-50.32	-31.65	.81	.81	.81	2926.	-45.45	-33.40	-133.	-100.	-15.8	-169.3	34.6	-137.8	-485.6	2591.
12.95	-57.40	-26.05	.75	.75	.75	2743.	-47.47	-36.63	-130.	-103.	-14.8	-172.1	39.0	-135.1	-479.5	2427.
13.30	-61.25	-41.03	.70	.69	.69	2553.	-49.71	-40.24	-127.	-105.	-13.7	-173.9	43.7	-131.6	-450.8	2257.
13.65	-63.55	-46.58	.74	.64	.64	2387.	-52.05	-46.21	-124.	-107.	-12.5	-173.7	48.7	-127.3	-400.8	2094.
14.00	-64.31	-52.51	.69	.59	.59	2218.	-54.26	-49.21	-120.	-107.	-11.2	-174.7	53.6	-122.1	-442.2	1975.
14.35	-68.33	-55.53	.74	.54	.54	2057.	-56.27	-52.15	-116.	-109.	-9.8	-174.9	58.2	-116.4	-425.3	1783.
14.70	-70.32	-55.98	.50	.49	.49	1904.	-58.01	-55.11	-110.	-109.	-8.5	-174.6	62.4	-108.4	-400.7	1639.
15.05	-72.75	-80.37	.46	.45	.45	1762.	-59.14	-67.49	-104.	-119.	-7.3	-173.3	65.5	-92.9	-371.3	1504.

P VS TIME   CASE #1

MINIMUM   X= 0.   Y=-3.0971934E+00   MAXIMUM   X= 1.6305000E+01   Y= 4.5493647E+01
SCALE/INCH X= 1.5130000E+00   Y= 5.8332390E+00   *OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 4.0590000E-01

TIME, SEC

ROLL RATE, DEGREES/SEC

Q VS TIME   CASE #1

MINIMUM X= 0.   Y=-2.171135E+00   MAXIMUM X= 1.630000E+01   Y= 1.775616E+01
SCALE/INCH X= 1.510000E+00 Y= 2.392644E+00   +OR- TOLERANCE/POINT X= 7.550000E-02 Y= 1.992530E-01

PITCH RATE, DEGREES/SEC

1.78E+01
1.74E+01
1.46E+01
1.22E+01
9.75E+00
7.34E+00
5.30E+00
2.51E+00
2.23E-01
-2.17E+00

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

TIME, SEC
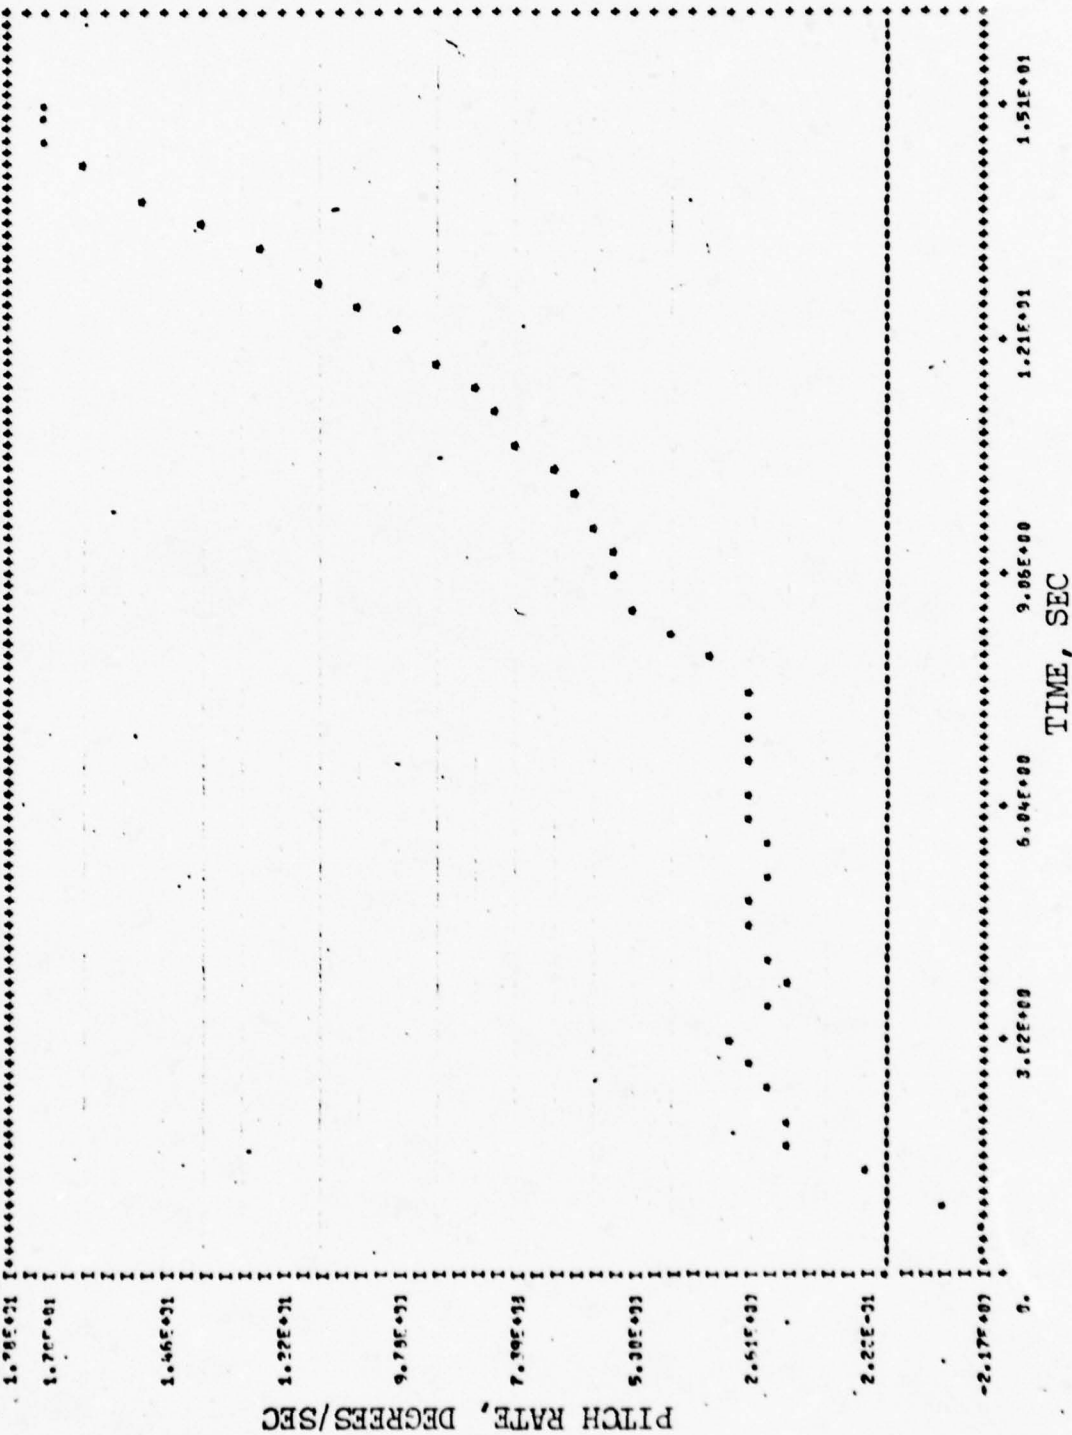
Φ VS TIME   CASE =1

MINIMUM   X= 1.   Y=-7.1126793E-02   MAXIMUM   X= 1.6300000E+01   Y= 3.3526177E+00
SCALE/INCH   X= 1.5100000E+00   Y= 4.1098974E-01   OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 3.4235045E-02
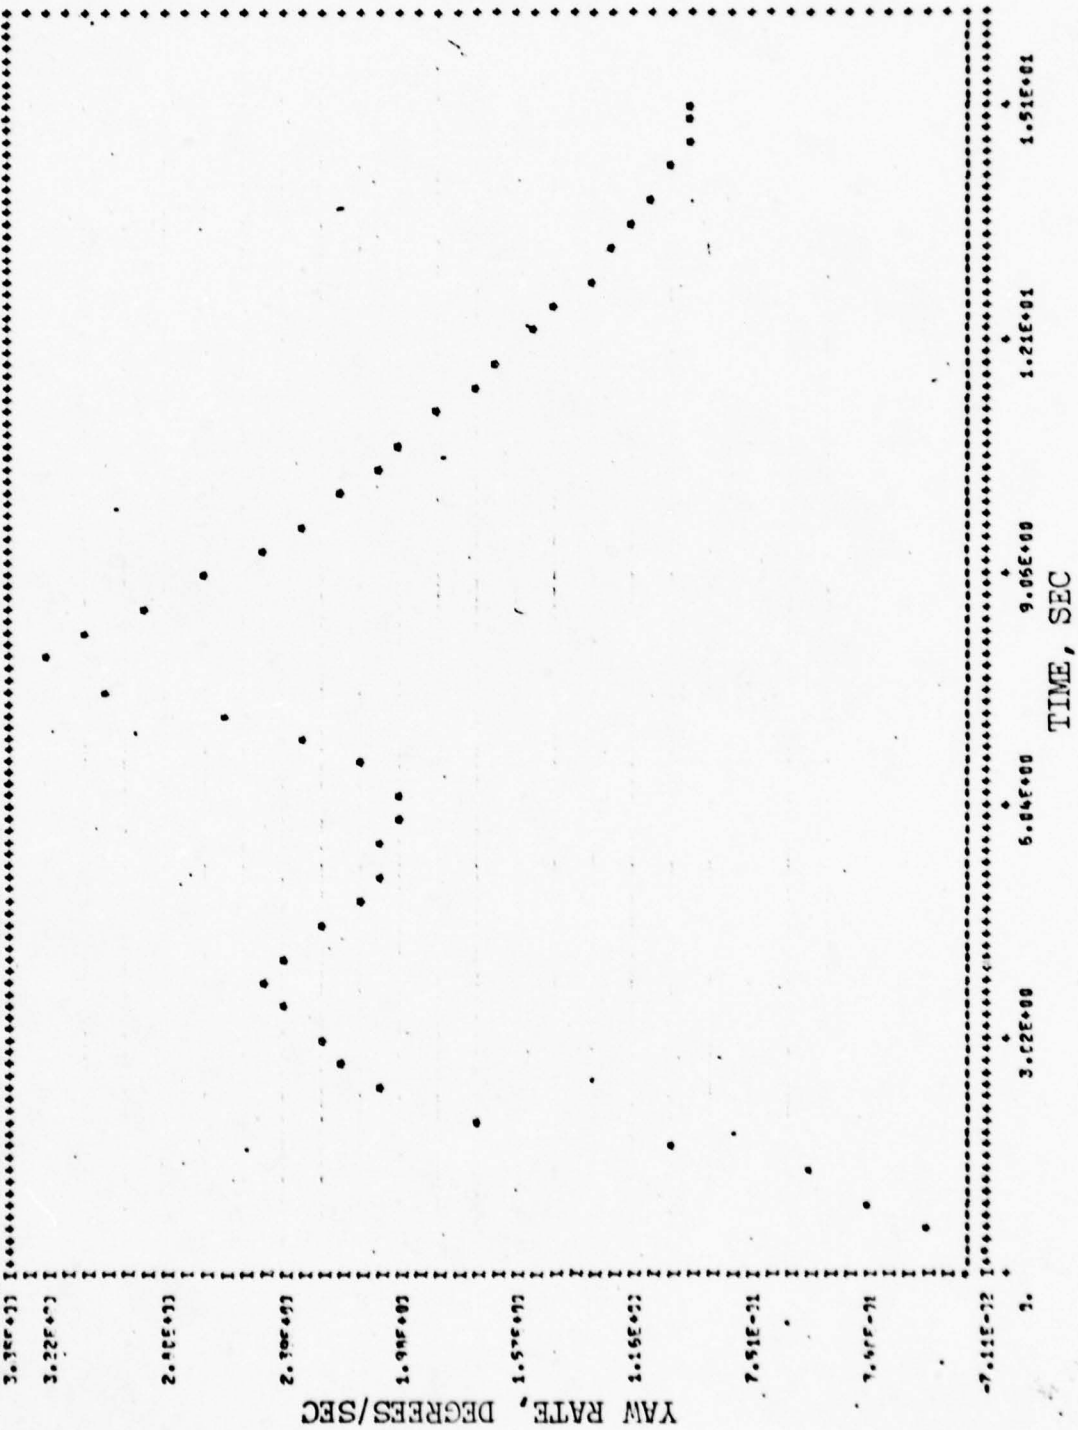
YAW RATE, DEGREES/SEC

TIME, SEC

3.22E+00   5.06E+00   9.06E+00   1.21E+01   1.51E+01

120

DR VS TIME   CASE #1

MAXIMUM   X= 1.6308000E+01   Y= 2.7696773E+00
SCALE/INCH   X= 1.510000E+00   Y= 2.5136558E-02
+OR- TOLERANCE/POINT   X= 7.550000E-02

MINIMUM   X= 0.   Y=-1.6397852E-01
SCALE/INCH   X= 1.510000E+00   Y= 3.0117943E-01

2.37E+00
2.22E+00

1.97E+00

1.67E+00

1.35E+00

1.06E+00

7.51E-01

4.50E-01

1.58E-01

-1.63E-01

0.   3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

TIME, SEC

RUDDER DEFLECTION, DEGREES
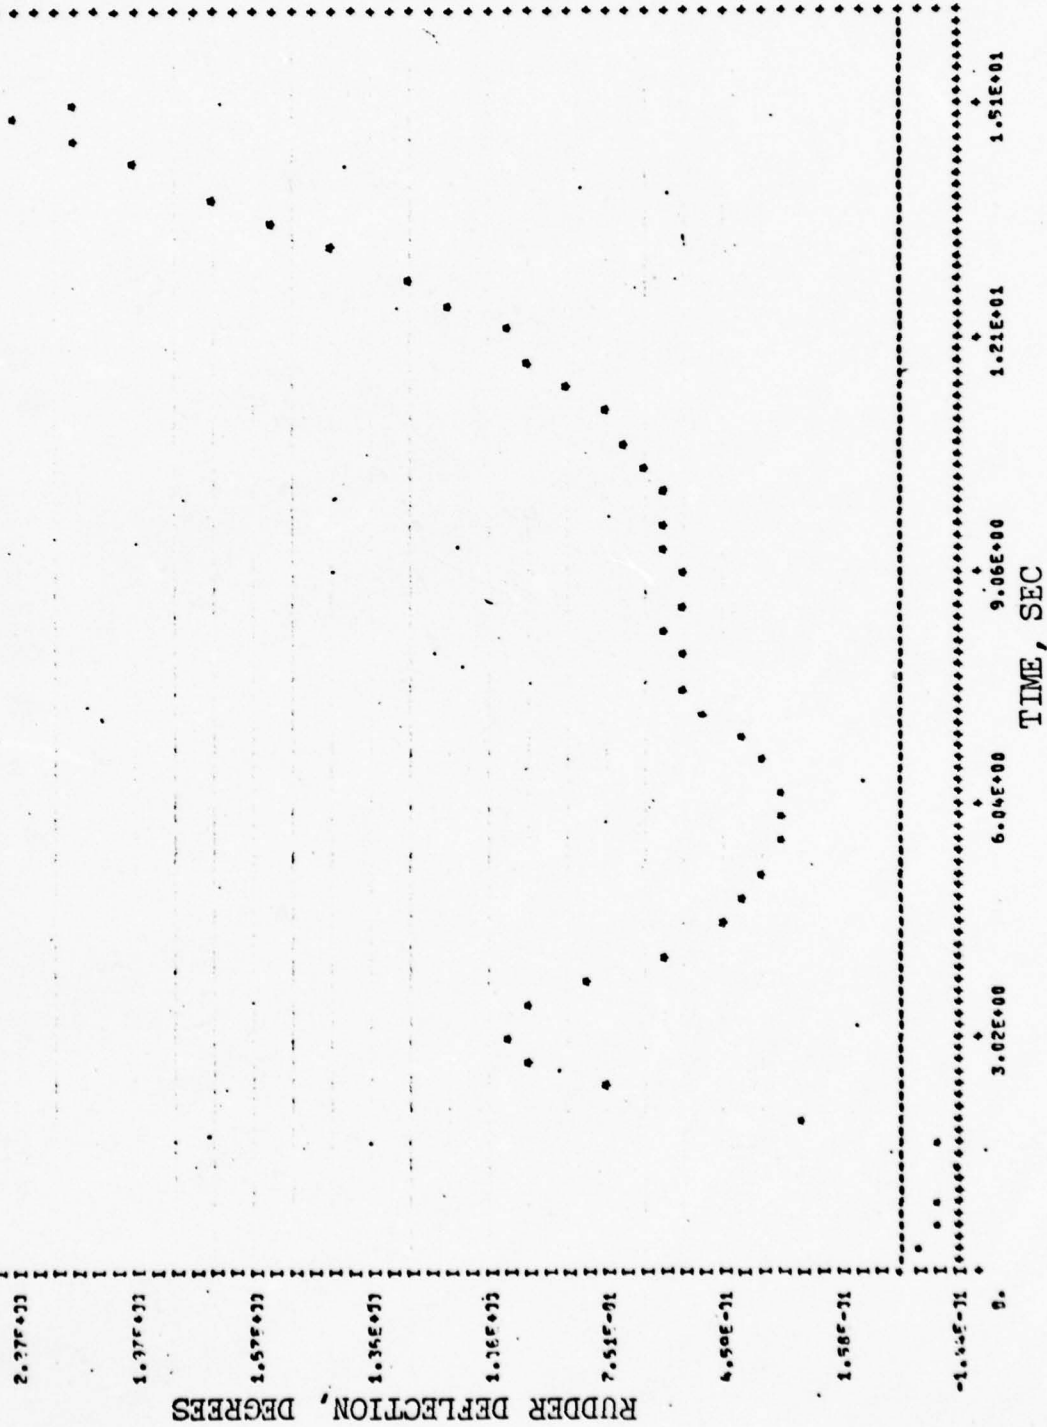
DA VS TIME   CASE #1

MINIMUM   X= 0.   Y=-5.0367279E+00   MAXIMUM   X= 1.6300000E+01   Y= 2.0906362E-01
SCALE/INCH X= 1.5130000E+00   Y= 6.2904281E-01   +OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 5.2465985E-02

TIME, SEC

AILERON DEFLECTION, DEGREES

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

122
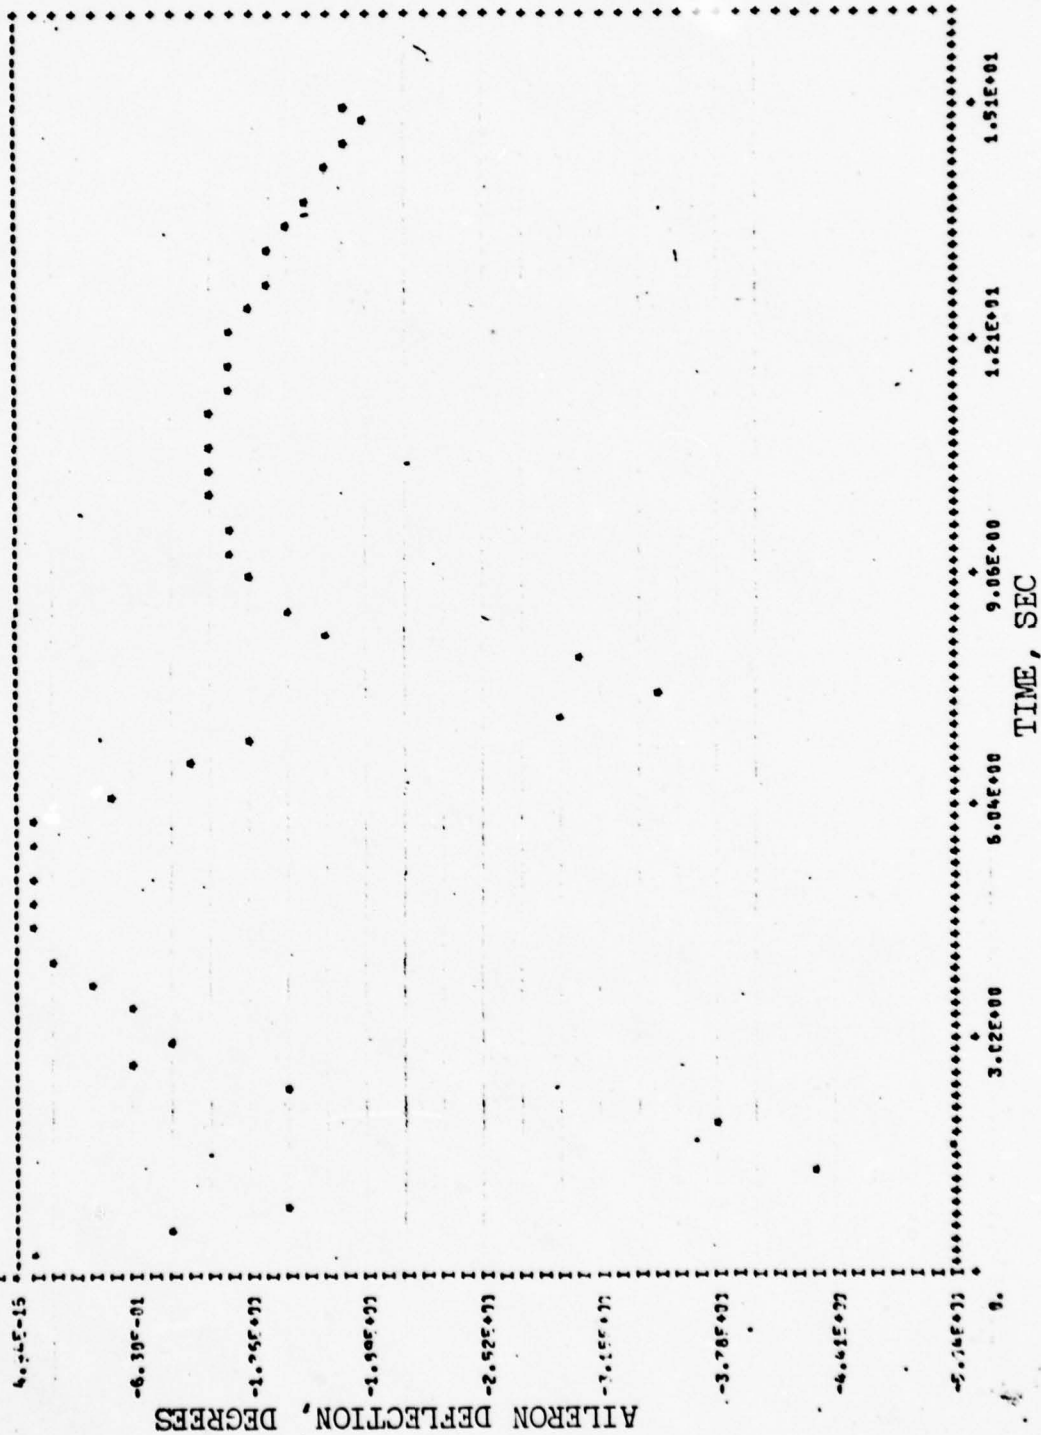
POS VS TIME   CASE #1

MINIMUM   X= 0.   Y=-3.2803039E+00   MAXIMUM   X= 1.6300000E+01   Y=-1.5590986E+00
SCALE/INCH X= 1.5100000E+00   Y= 2.0770772E-01   +OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 1.7302053E-02

TIME, SEC

ELEVATOR DEFLECTION, DEGREES

123

ALPHA VS TIME   CASE #1
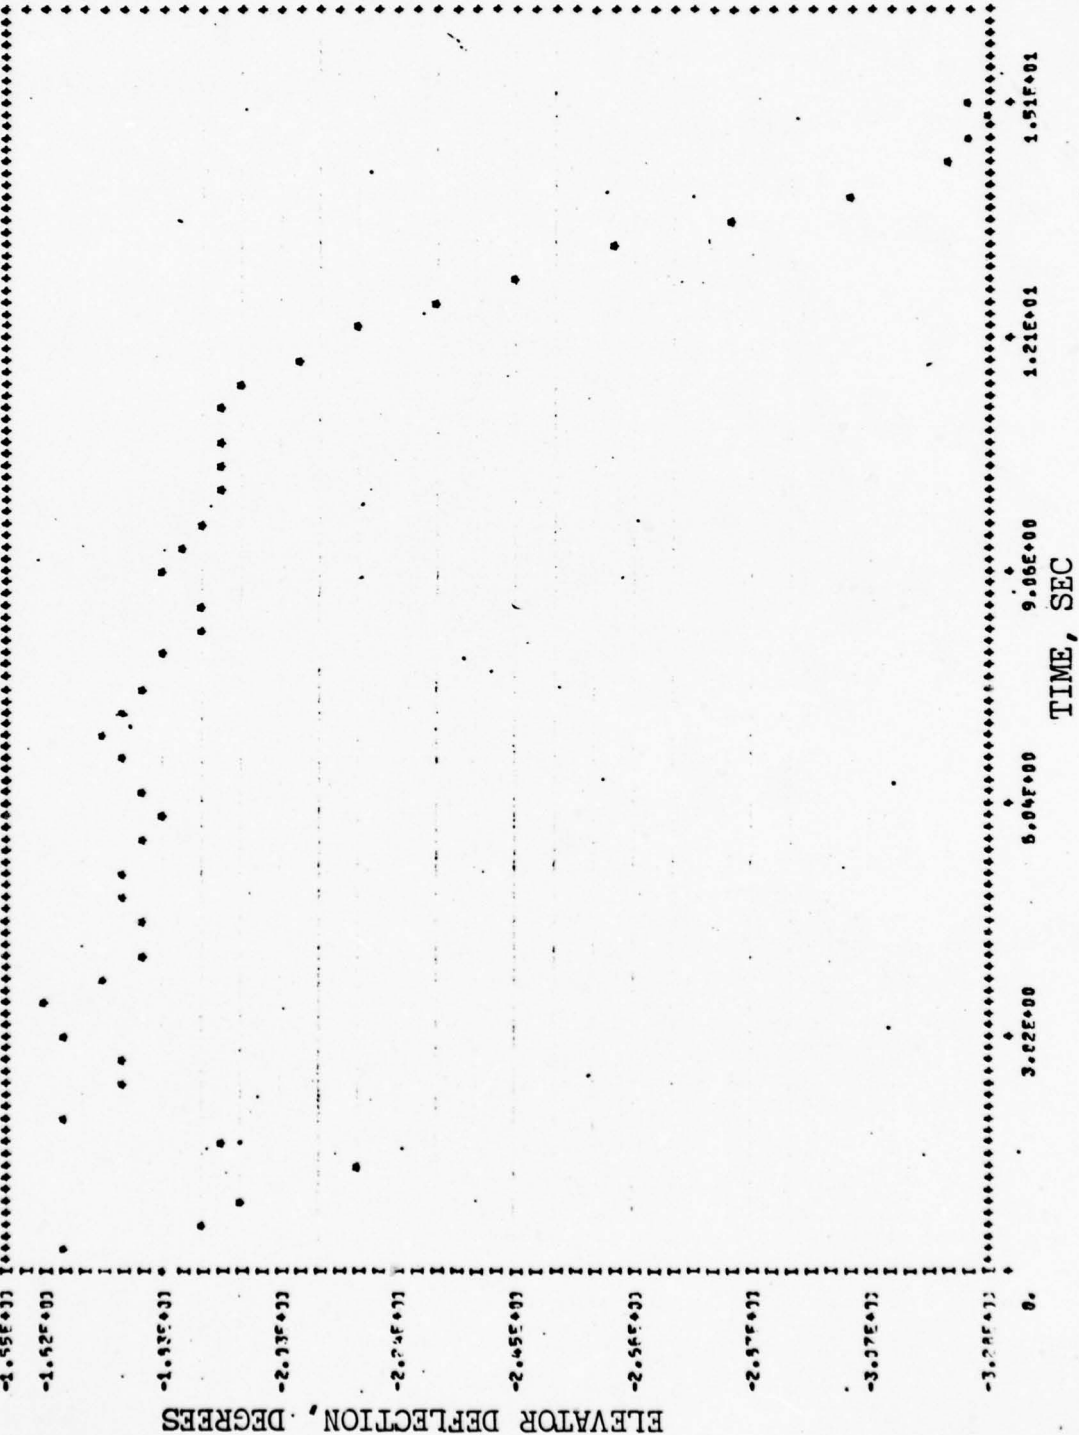
MINIMUM   X= 0.   Y= 7.4998520E-01   MAXIMUM   X= 1.6300000E+01   Y= 9.5580930E+00
SCALE/INCH X= 1.5100000E+00   Y= 1.0549949E+00   +OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 8.7281079E-02

ANGLE OF ATTACK, DEGREES

9.55E+00
8.17E+00
7.08E+00
6.02E+00
4.97E+00
3.91E+00
2.84E+00
1.90E+00
7.50E-01

TIME, SEC

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

124
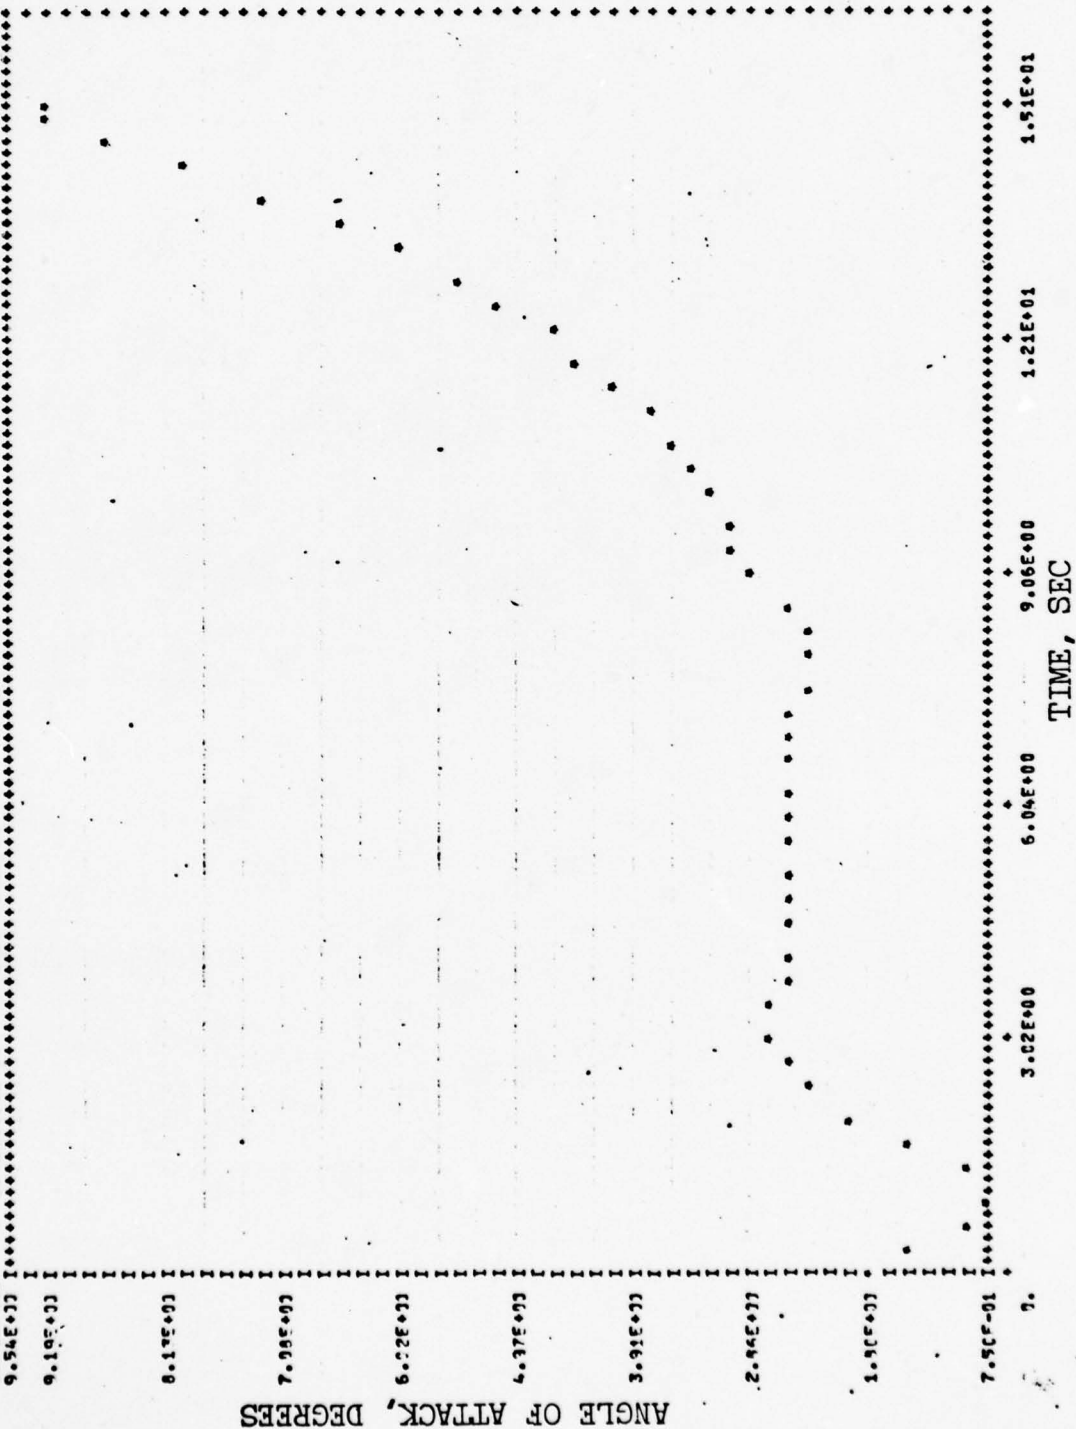
BETA VS TIME   CASE #1

MINIMUM Y= 0.   Y=-1.2730593E-01   MAXIMUM   X= 1.6308000E+01   Y= 1.3069100E+00
SCALE/INCH X= 1.5100000E+00   Y= 1.7217584E-01   *OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 1.6342247E-02
1.31E+00

SIDESLIP ANGLE, DEGREES

TIME, SEC

125

LONG STICK VS TIME   CASE #1

MINIMUM   X= 0.   Y= 0.   MAXIMUM   X= 1.6300600E-01   Y= 4.1199022E+01
SCALE/INCH   X= 1.5103000E+00   Y= 4.9459570E+00   +OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 4.1199022E-01

LONGITUDINAL STICK FORCE, POUNDS

TIME, SEC

LATERAL STICK FORCE, POUNDS

TIME, SEC

ERROR VS TIME ' CASE #1

MINIMUM   Y= 0.   Y=-7.2945016E+01   MAXIMUM   X= 1.6300000E+01   Y= 1.6459759E+01
SCALE/INCH X= 1.5100000E+00 Y= 1.0492770E+01   OR- TOLERANCE/POINT. X= 7.5500000E-02   Y= 8.7404774E-01

1.65E+01 I

1.10E+01 I

4.75E-01

-1.10E+01

-2.35E+01

-3.10E+01

-4.05E+01

-5.20E+01

-6.25E+01

-7.20E+01

0.   3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

TIME, SEC

TRAVERSE AIMING ERROR, MILS

128

EPELTL VS TIME   CASE #1

MINIMUM   X= 0.   Y=-8.3239510E+01   MAXIMUM   X= 1.6300000E+01   Y= 1.3982935E+01
SCALE/INCH   X= 1.5100000E+00   Y= 1.1659283E+01   +OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 9.7218300E-01
1.39E+01

1.30E+01

-1.56E+00

-1.43E+01

-2.56E+01

-3.55E+01

-4.57E+01

-5.39E+01

-7.15E+01

-8.72E+01

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

TIME, SEC

ELEVATION AIMING ERROR, MILS

129

CASE = 1.   ENCOUNTER = 8

TANDS COMPUTER PROGRAM

—————————— ATTACKER ——————————   //   —————————— TARGET ——————————

TIME SEC	\ POSITION - VELOCITY IN EARTH COORDINATES \					/	/ POSITION EARTH COORD /			AIR-SPEED //	BODY RATES //			ALPHA/LOAD // FACTOR //	
	X FEET	Y FEET	Z	XDOT	YDOT FEET/SEC	ZDOT	X FEET	Y FEET	Z	SPEED (FT/SEC)	P DEGREES/SEC	Q	R	DEG	G

(Numeric data table — extensive columns of flight-trajectory values for time steps from approximately 0.25 to 15.25 seconds. The original print is severely faded and the individual digit values cannot be reliably transcribed.)

CASE = 1.   ENCOUNTER = 8

TAMOS COMPUTER PROGRAM

ATTACKER VARIABLES

TIME SEC	VELOC- ITY FT/SEC	VEL DOT FT/SEC2	ALPHA DEG	ALPHA DOT DEG/SEC	BETA DEG	BETA DOT DEG/SEC	ALTI- TUDE FEET	ALT DOT FT/SEC	BODY RATES AND ACCELERATIONS						// LOAD FACTOR // G	LAT ACC FT/SEC2
									P, DEGREES/SEC	Q, DEGREES/SEC	R,	PDOT,	QDOT, DEGREES/SEC2	RDOT,	RDOT	
0.15	827.5	.975	1.747	-.012	0.000	0.000	20000.0	0.00	0.00	0.00	0.00	0.00	0.00	1.45	0.00	0.00

CASE = 1.   ENCOUNTER = 3

TANDS COMPUTER PROGRAM

ATTACKER VARIABLES

TIME SEC	// PILOT COMMANDS // LONG	// LAT	// STAB	// SURFACE DEFLECTIONS CANARD	// AIL	// DIF-TAIL DEGREES	RUD //	// PSI	// ATTITUDE ANGLES THETA DEGREES	// PHI	// GAMMA	// MACH	THRUST LBS

PAGE = 1.   ENCOUNTER = 8

TANDS COMPUTER PROGRAM

BULLET - SIGHT - GEOMETRY VARIABLES

Φ VS TIME   CASE #1

MAXIMUM   X= 1.6300000E-01   Y= 6.7736530E+01
+OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 7.2107511E-31

X= 0.   Y=-4.3720012E+00
SCALE/INCH   X= 1.5100000E+00   Y= 8.6563539E+00

ROLL RATE, DEGREES/SEC

TIME, SEC

R VS TIME   CASE =1

MINIMUM   X= 0.   Y=-1.046266E-01   MAXIMUM   X= 1.630000E+01   Y= 7.352099E+00
SCALE/INCH   X= 1.510000E+00   Y= 4.162079E-01   +OR-TOLERANCE/POINT   X= 7.550000E-02   Y= 3.469525E-02

YAW RATE, DEGREES/SEC

3.22E+00
2.81E+00
2.39E+00
1.99E+00
1.56E+00
1.14E+00
7.28E-01
3.12E-01
-1.04E-01

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

TIME, SEC

136
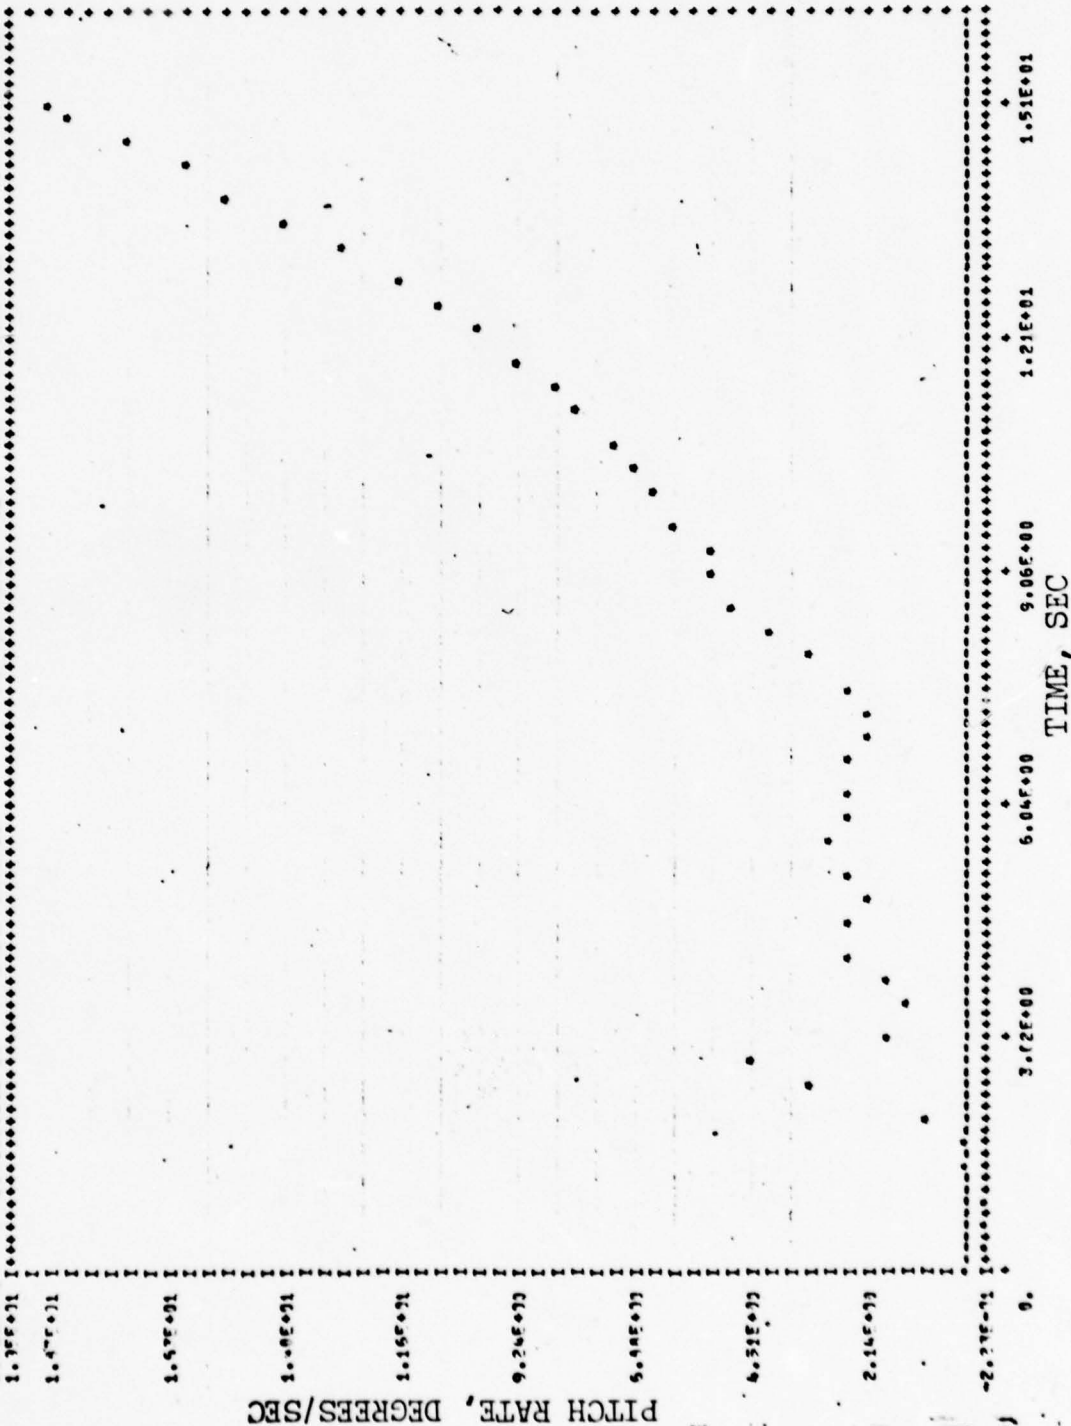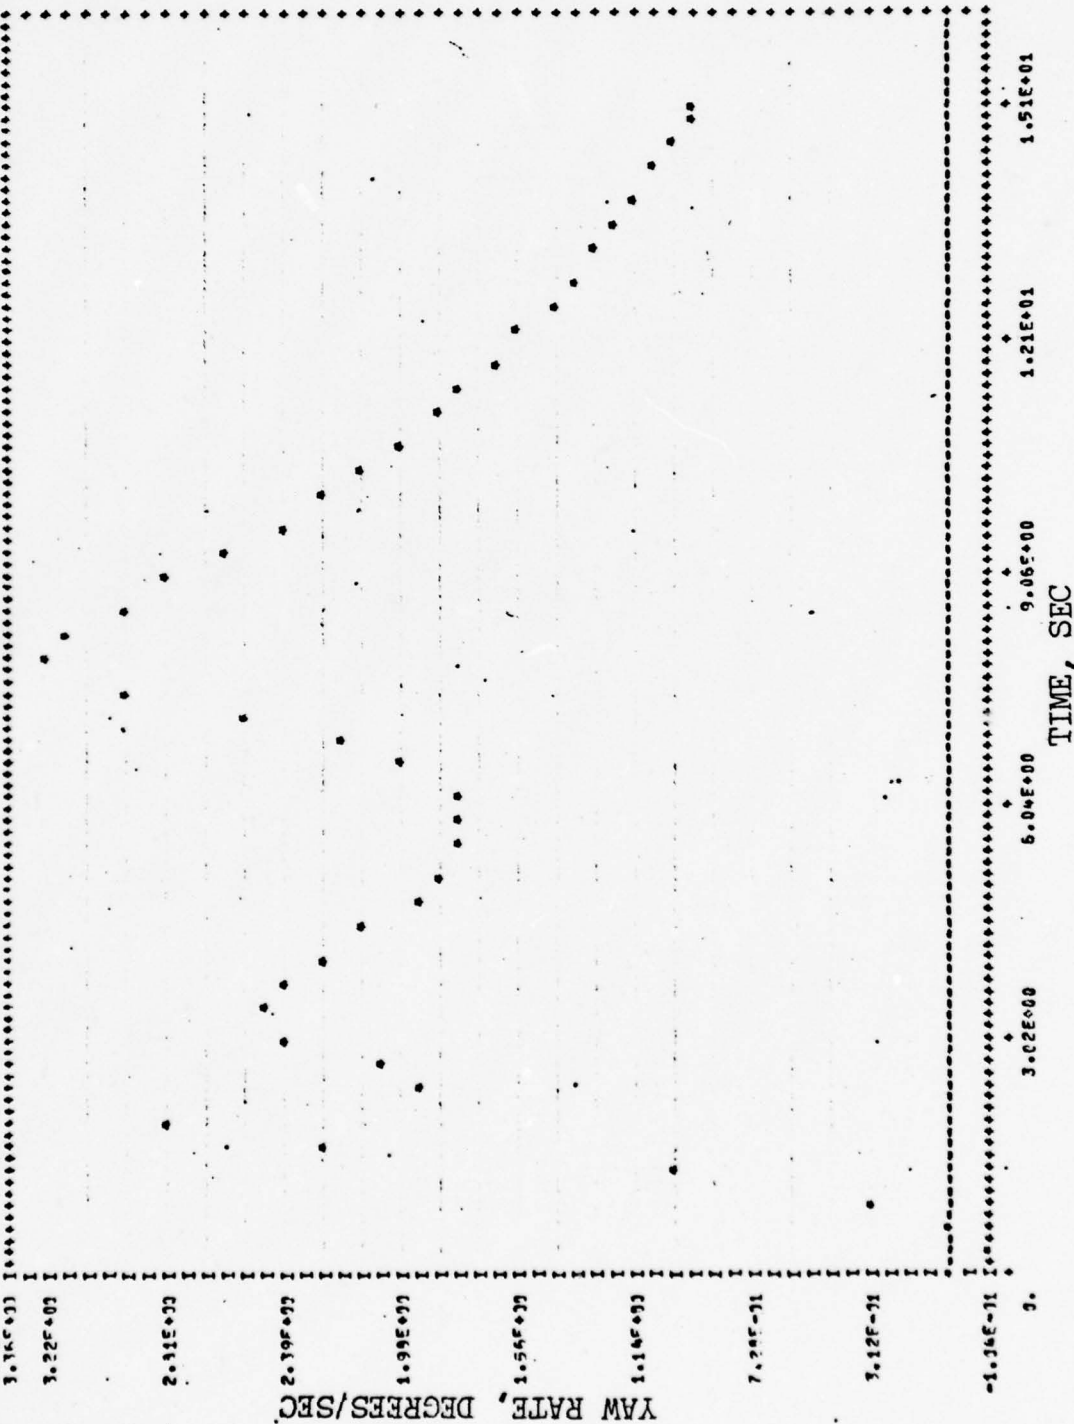
ΔR VS TIME   CASE #1

MINIMUM X= 0.   Y=-1.5715869E-02   MAXIMUM X= 1.5300000E+01   Y= 2.6750159E+00
SCALE/INCH X= 1.5100000E+00 Y= 2.9960743E-01   +OR- TOLERANCE/POINT X= 7.5500000E-02 Y= 2.4907319E-02
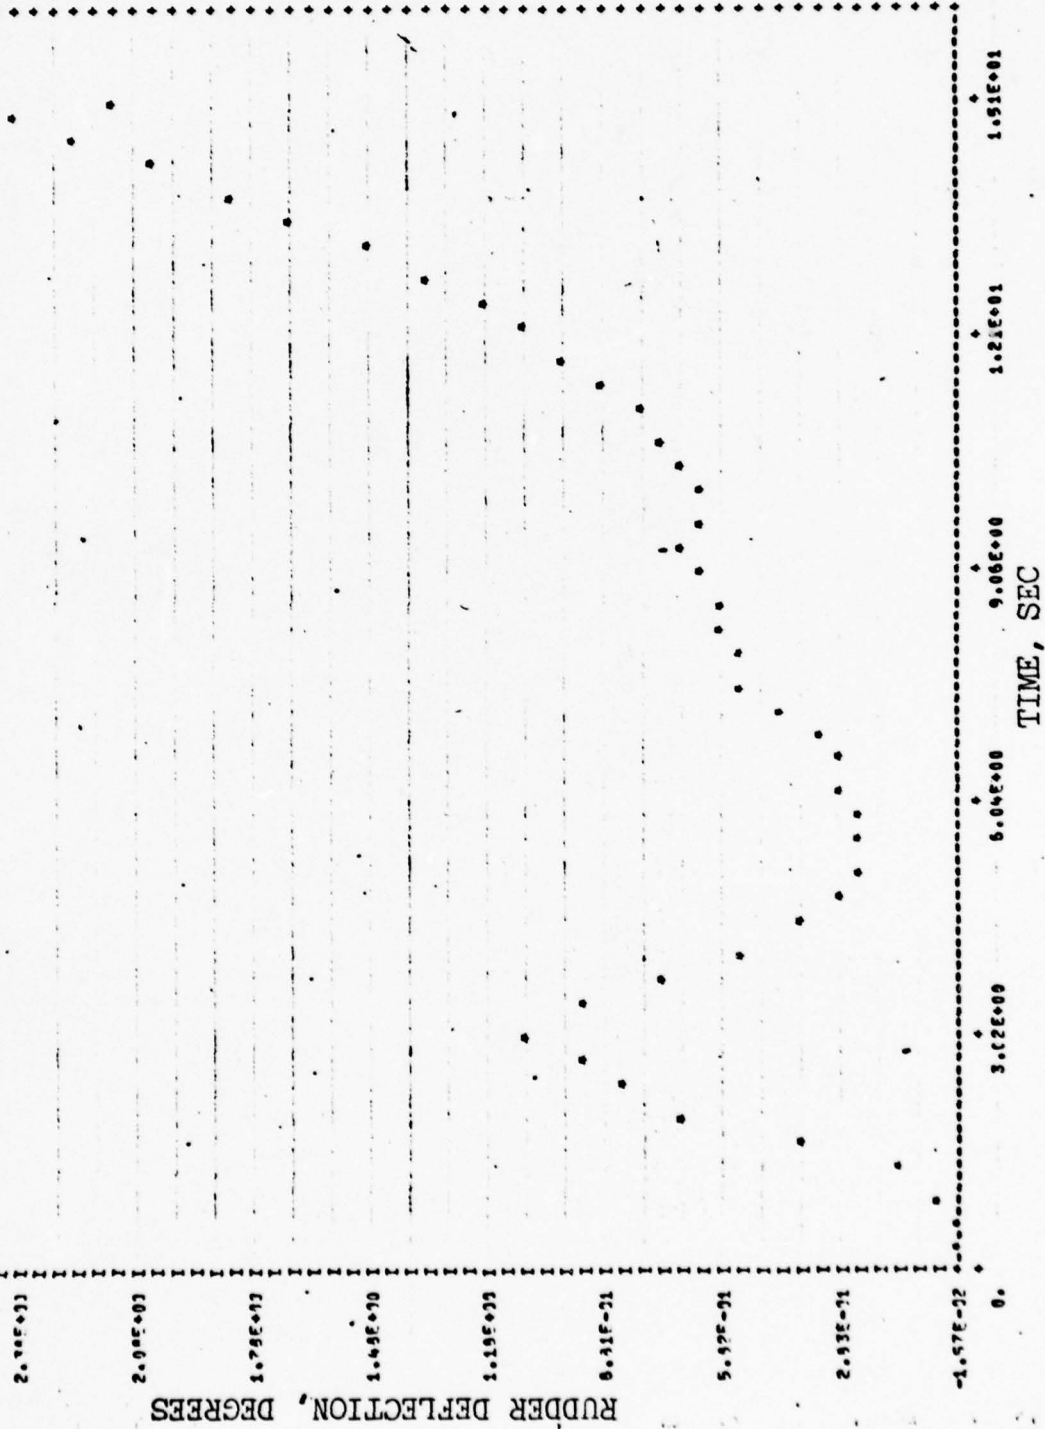
RUDDER DEFLECTION, DEGREES

TIME, SEC

DA VS TIME   CASE #1

MINIMUM   X= 0.   Y=-8.7824583E+00   MAXIMUM   X= 1.6300000E+01   Y= 8.2407400E-01
SCALE/INCH   X= 1.5100000E+00   Y= 1.1497399E+00   ◆OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 9.5773323E-02
9.25E-01 I

4.06E-01 I

-7.07E-01 I

-1.65E+00 I

-3.01E+00 I

-4.16E+00 I

-5.09E+00 I

-6.65E+00 I

-7.65E+00 I

-8.75E+00 I

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

TIME, SEC

AILERON DEFLECTION, DEGREES

138

RMS VS TIME   CASE #1

ELEVATOR DEFLECTION, DEGREES

TIME, SEC
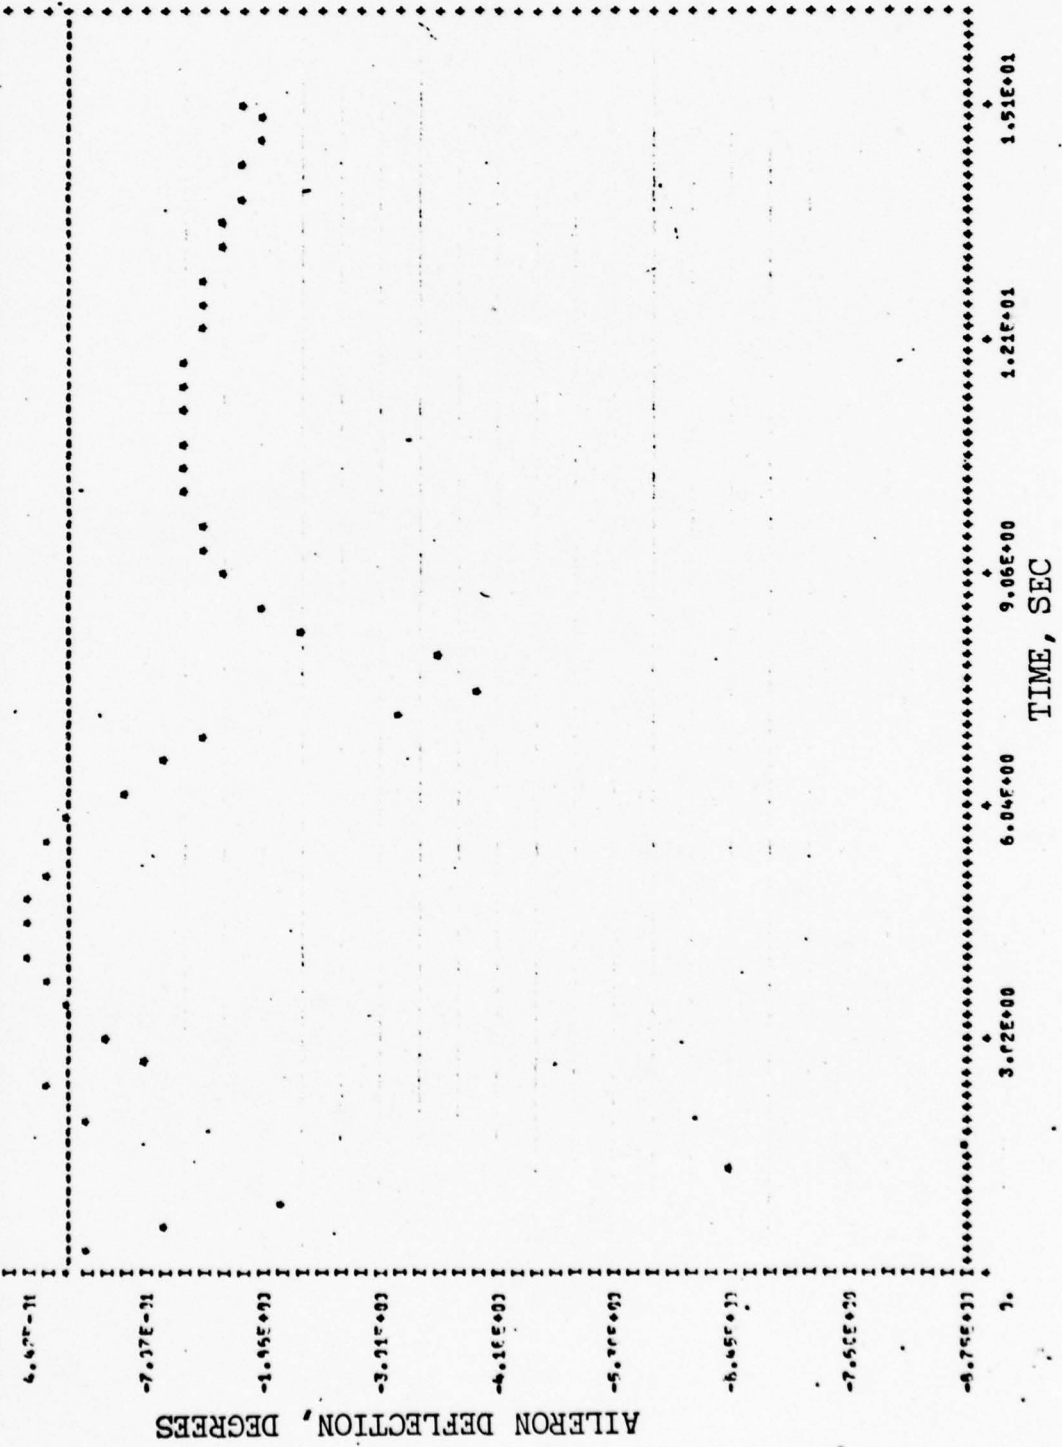
ALPHA VS TIME   CASE #1
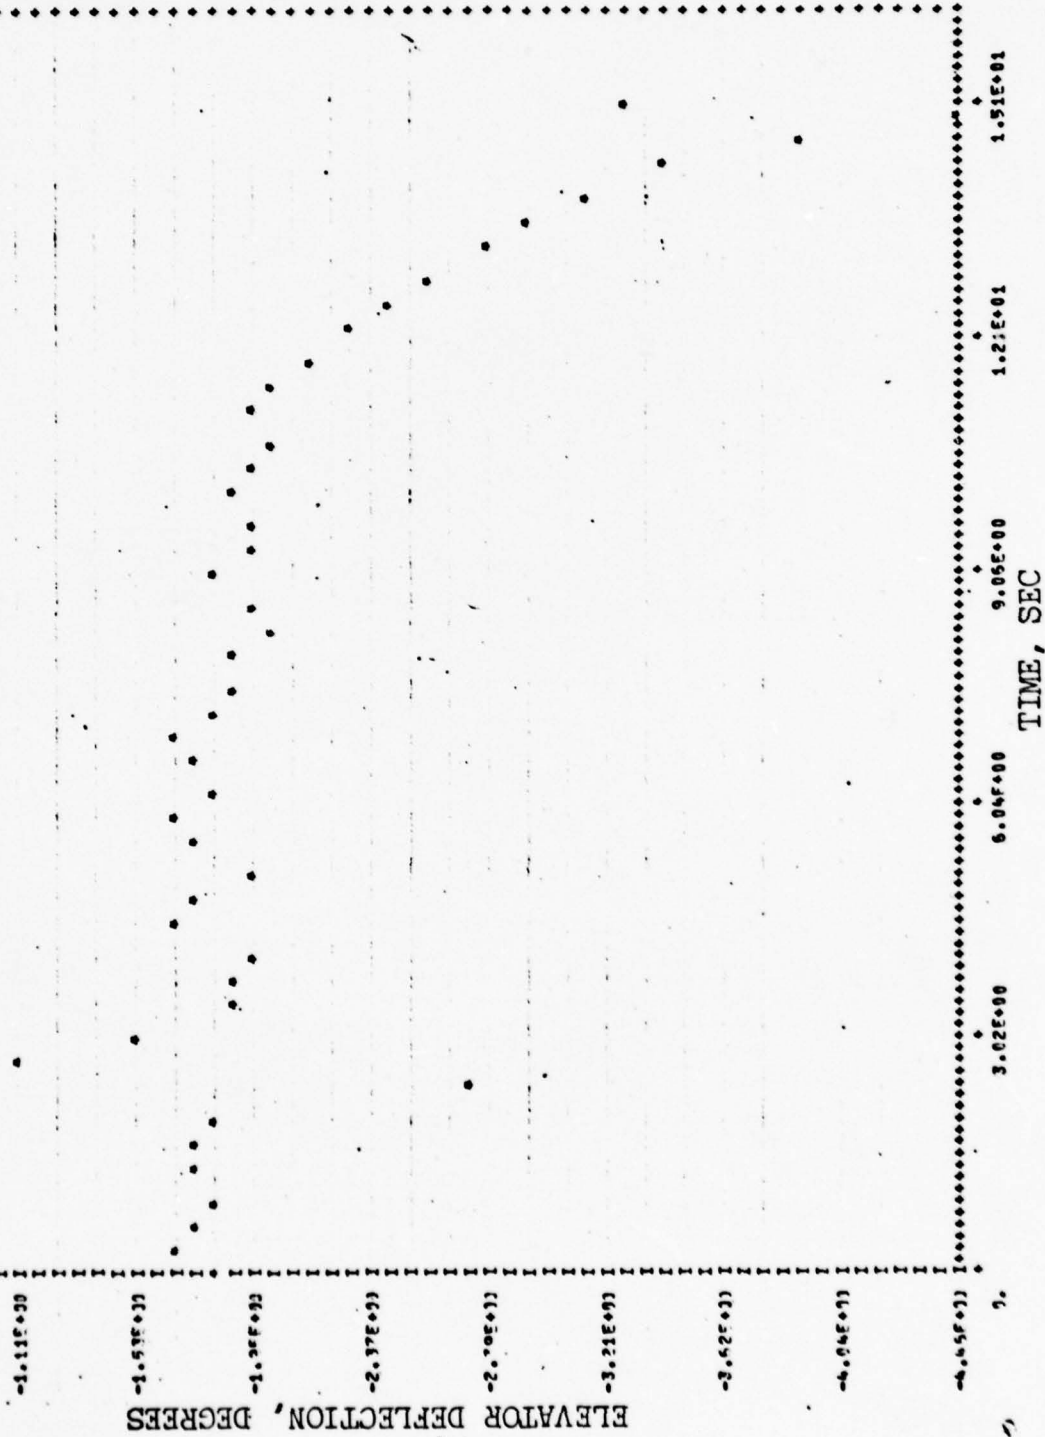
MINIMUM   X= 0.   Y= 1.6472415E+00   MAXIMUM   X= 1.6300000E+01   Y= 9.9806640E+00
SCALE/INCH X= 1.5100000E+00   Y= 9.9160539E-01   +OR- TOLERANCE/POINT   X= 7.5500000E-02   Y= 8.2608225E-02

TIME, SEC

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

ANGLE OF ATTACK, DEGREES

9.50E+00
8.59E+00
7.51E+00
6.50E+00
5.41E+00
4.52E+00
3.63E+00
2.54E+00
1.65E+00
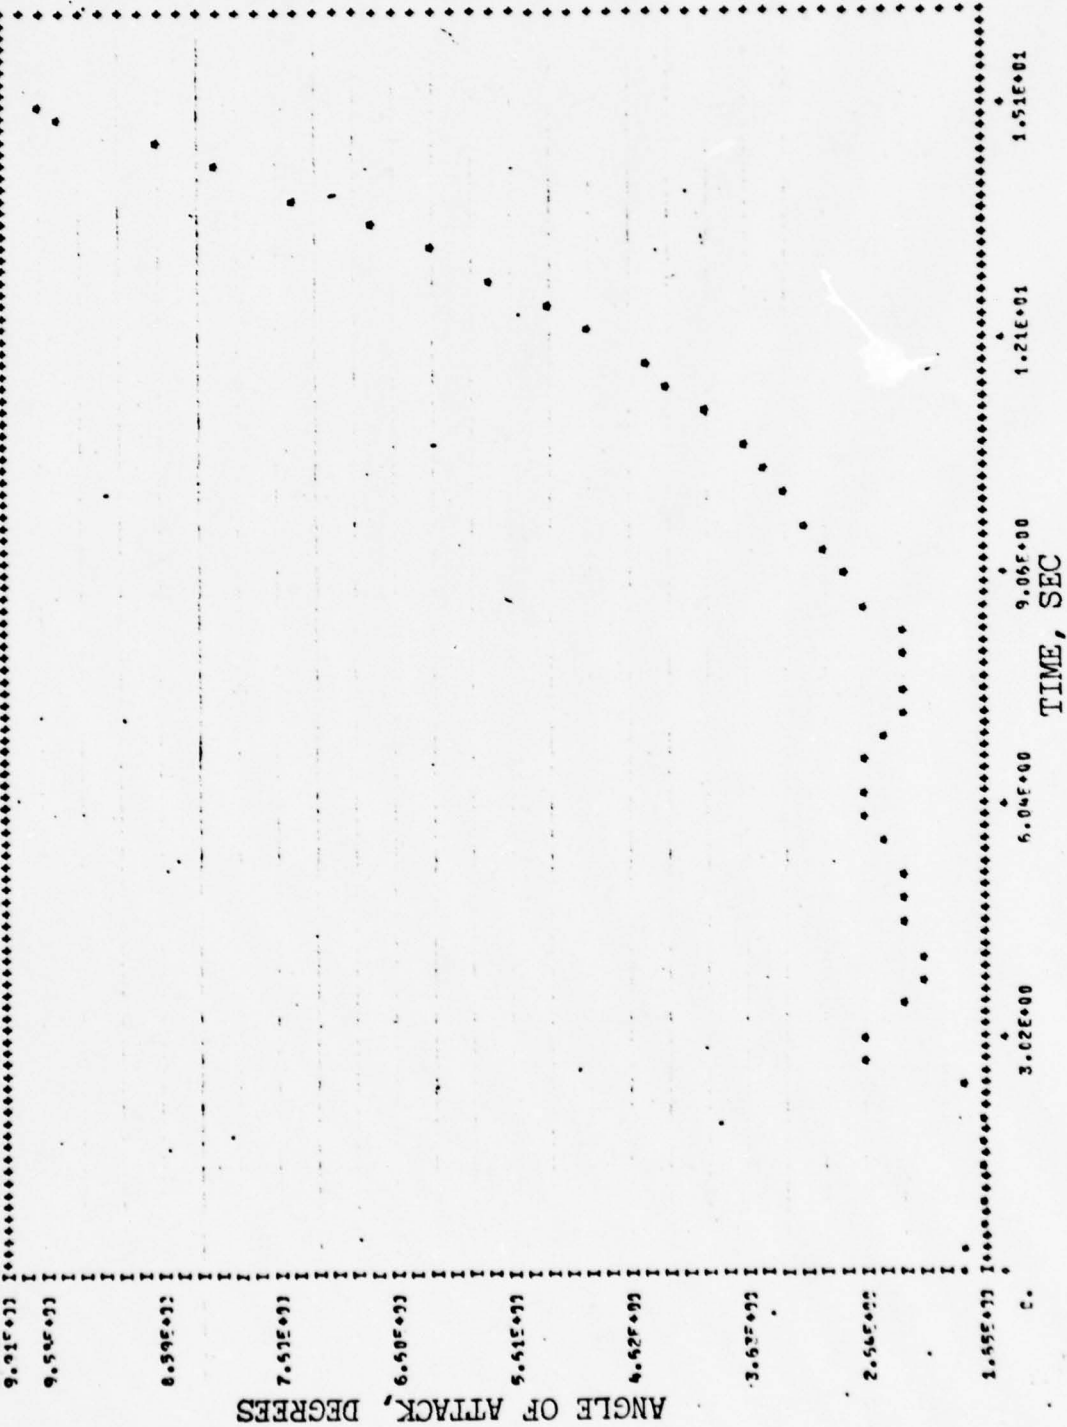
BETA VS TIME   CASE #1

MINIMUM   X= 0.   Y=-1.0637047E-02   MAXIMUM. X= 1.6300000E-01   Y= 1.3152975E+00
SCALE/INCH X= 1.5100300E+00   Y= 1.5917581E-01   +OR- TOLERANCE/POINT X= 7.5500000E-02   Y= 1.3259345E-02

SIDESLIP ANGLE, DEGREES
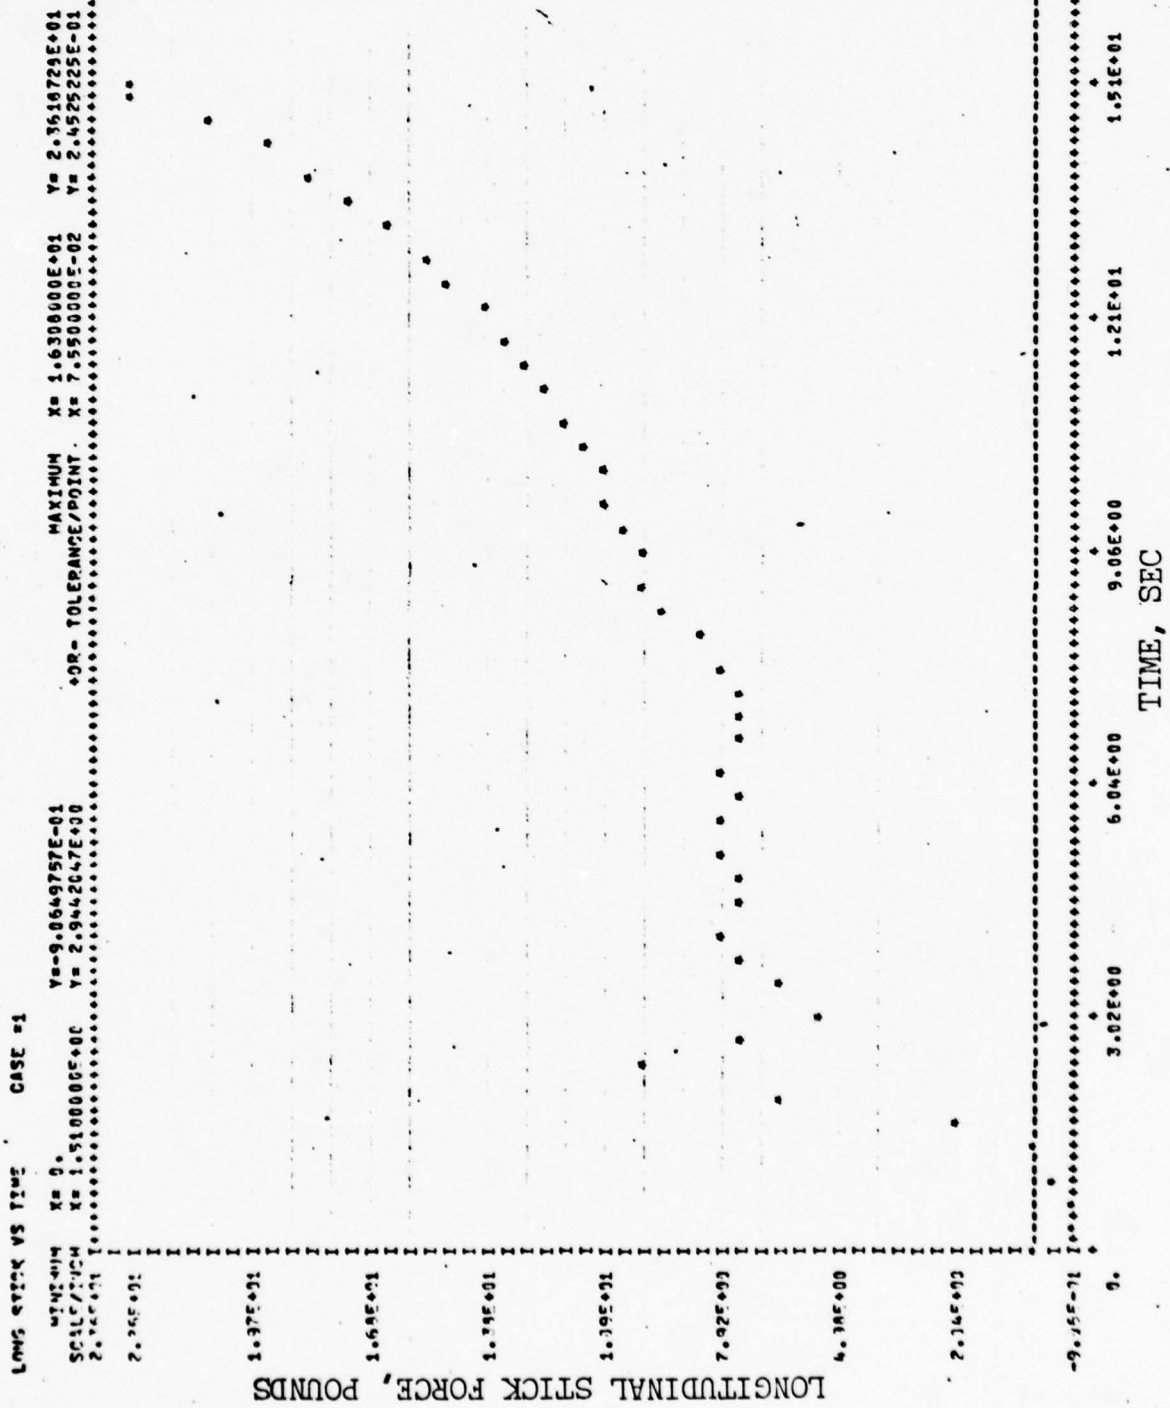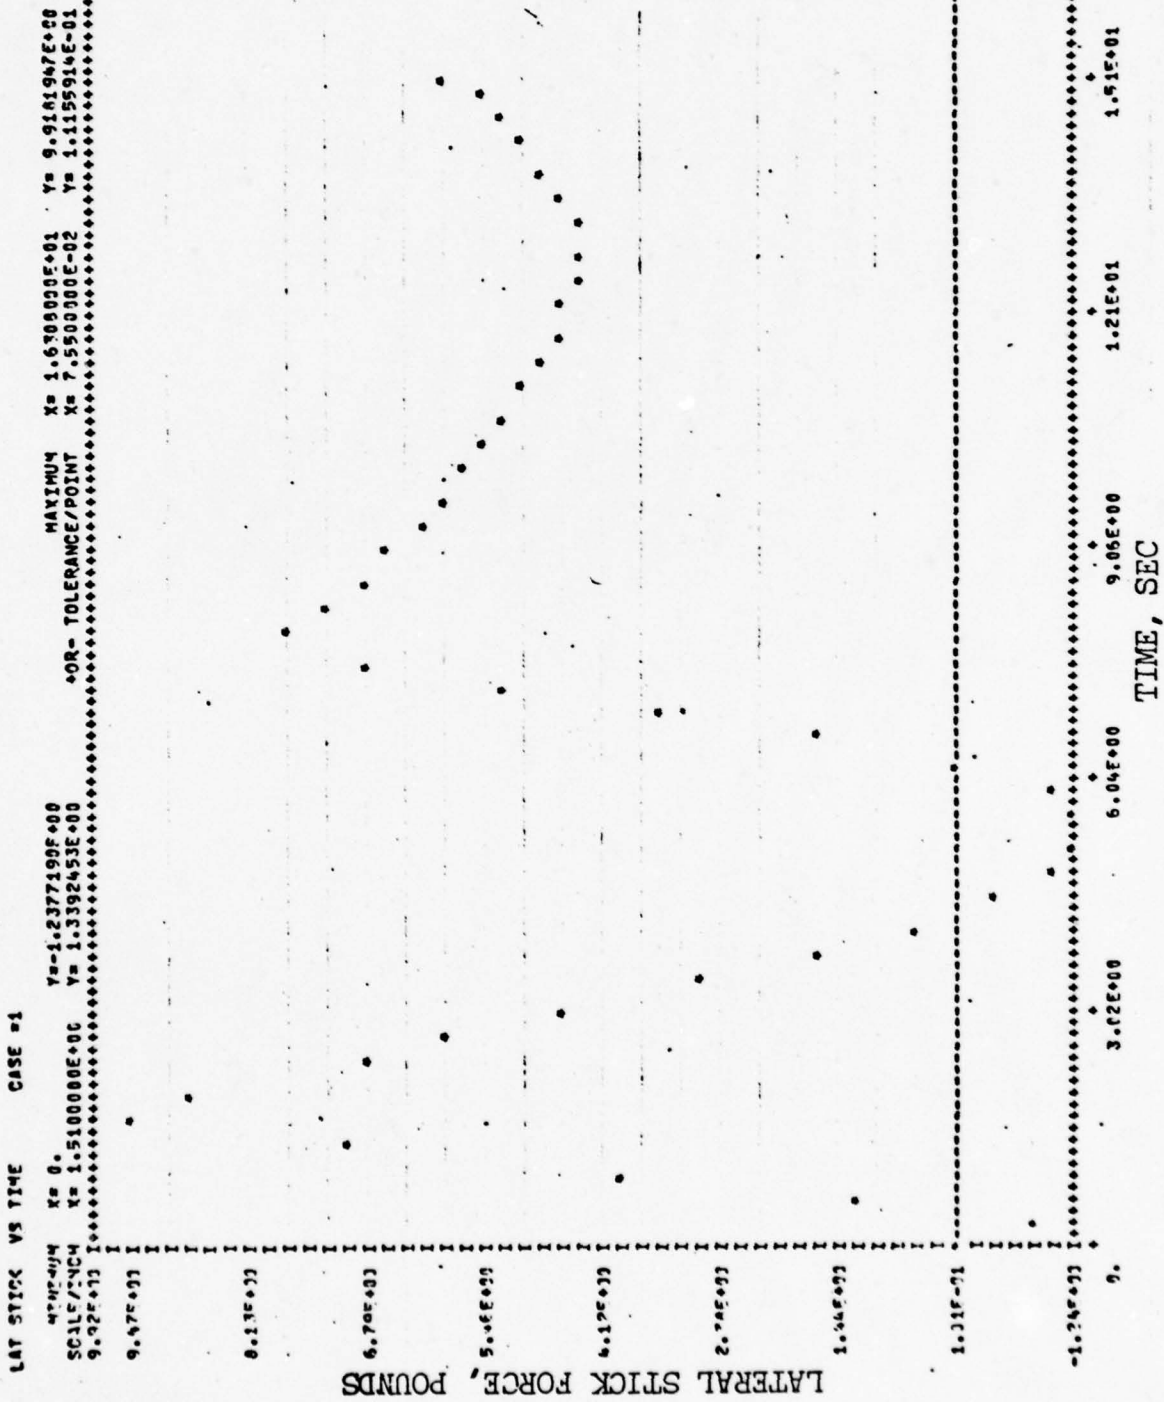
TIME, SEC

141

LAT STICK VS TIME   CASE #1

MAXIMUM   X= 1.630000E+01   Y= 9.916947E+00
X= 0.   Y=-1.237739E+00   +OR- TOLERANCE/POINT   X= 7.550000E-02   Y= 1.115914E-01
SCALE/INCH   X= 1.510000E+00   Y= 1.339453E+00

LATERAL STICK FORCE, POUNDS

TIME, SEC

143

TRAVERSE VS TIME   CASE #1

MINIMUM   X= 2.   Y=-7.3126179E+01
SCALE/INCH X= 1.5100000E+00 Y= 1.0902772E+01

MAXIMUM   X= 1.6300000E+01 Y= 1.7495919E+01
+OR- TOLERANCE/POINT X= 7.5500000E-02 Y= 9.0020094E-01

1.77E+01
1.64E+01
3.16E+01
-7.73E+00
-1.96E+01
-2.94E+01
-4.04E+01
-5.13E+01
-6.22E+01
-7.31E+01

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

TIME, SEC

TRAVERSE AIMING ERROR, MILS

144

EOPLTL VS TIME   CASE #1

MINIMUM   X= 0.   Y=-3.7926856E+01
MAXIMUM   X= 1.6300000E+01   Y= 1.5360659E+01
SCALE/INCH X= 1.5103000E+00   Y= 6.3968204E+00   +OR- TOLERANCE/POINT. X= 7.5500000E-02   Y= 5.3265516E-01

ELEVATION AIMING ERROR, MILS

TIME, SEC

3.02E+00   6.04E+00   9.06E+00   1.21E+01   1.51E+01

145
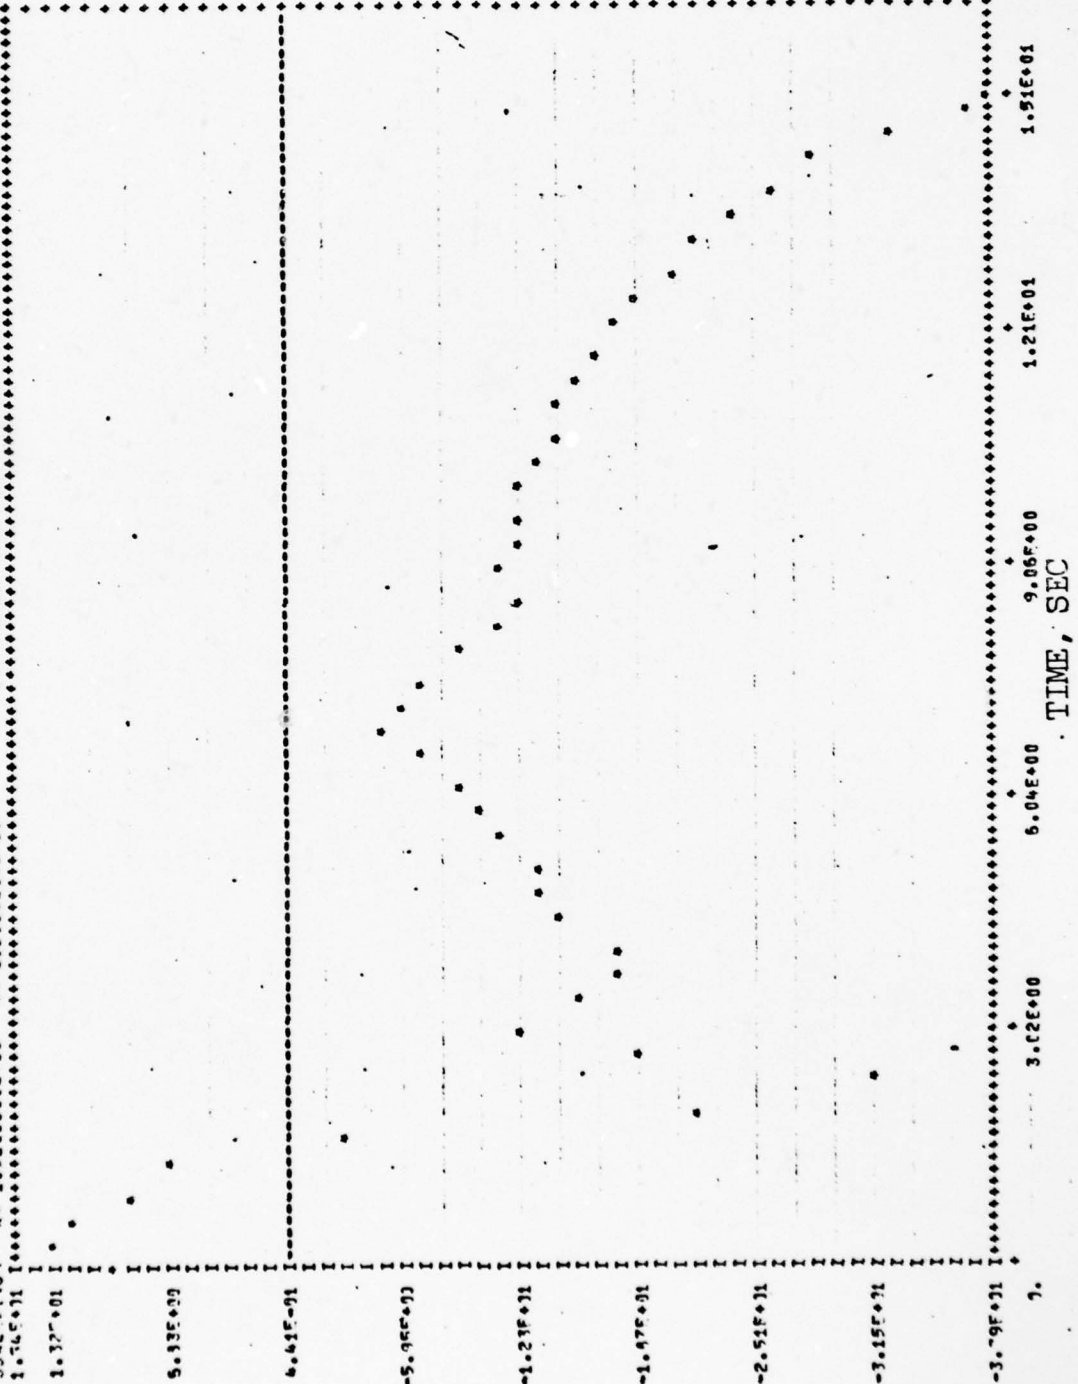
```
*ID OCT20
*DELETE FCEXEC.183
        IF (ITCCNT.LT.5000) GO TO 200
*DELETE FCEXEC.185
  130 FORMAT(1H0,30H ERROR --- ITGCNT EXCEEDS 5000)
*DELETE PRINT.183
        RPPT22( 2) = QCOM
*DELETE PRINT.184
        RPPT22( 3) = PHIC
*DELETE PRINT.262
      .,2F8.1,F10.1,5F8.2,F6.2)
*DELETE PRINT.275
  821 FORMAT(1X,F6.2,1X,F8.1,5F8.3,F8.1,7F8.2,2F6.2)
*INSERT AIRFI1.366
        PARAM(480)=RHO
*D PILTI1.64
        DTHE= -ERELTL*1000.
*D PILTI1.65
        DTHT=-ERTRTL*1000.
*DELETE INDAC1.26
     .,               ( ERELTLC , DUM3( 13))
*DELETE INDAC1.27
     .,               ( ERTRTLC , DUM3( 14))
*DELETE TARGET.92
      .      ALTOCD/-1.4,0.0,1.4,2.8,4.2,5.5,7.0,8.4,9.8,10.0 /
*DELETE TARGET.93
      .     ,DTHYCD/-100.,-80.,-60.,-45.,0.,30.,45.,60.,80.,100. /
*DELETE TARGET.94
      .     ,XTHTDC/20)0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0/
*DELETE TARGET.95
*DELETE IGNMER.90
      .     545403373,
*DELETE IGNMER.91
      .     545403374,
*DELETE IGNMER.92
      .     545403372,
*DELETE IGNMER.93
      .     545403372,
*DELETE IGNMER.94
      .     545403392,
*DELETE IGNMER.95
      .     545403391,
*DELETE IGNMER.96
      .     545403392,
*DELETE IGNMER.97
      .     545403391/
*DELETE IGNMER.106
     .0.,2.,6.,8.,10.,11.,12.,13.,14.,15. /
*DELETE IGNMER.134
      .      30..       40..       50..      60..      70. /
```

```
*DELETE ICNMPR.146
      ITMX(1,1)=660   $ ITMX(1,2)=410   $ ITMX(1,4)=410   $ ITMX(1,5)=410
*DELETE ICNMPR.147
      ITMX(2,1)=370   $ ITMX(2,2)=410   $ ITMX(2,5)=310   $ ITMX(2,7)=410
*DELETE ICNMPR.148
      ITMX(3,1)=370   $ ITMX(3,2)=410   $ ITMX(3,7)=610   $ ITMX(3,8)=410
*DELETE ICNMPR.149
      ITMX(4,1)=660   $ ITMX(4,2)=410   $ ITMX(4,4)=610   $ ITMX(4,5)=410
*DELETE ICNMPR.150
      ITMX(5,1)=670   $ ITMX(5,2)=410   $ ITMX(5,4)=610   $ ITMX(5,5)=410
*DELETE ICNMPR.151
      ITMX(6,1)=350   $ ITMX(6,2)=410   $ ITMX(6,4)=310   $ ITMX(6,5)=410
*DELETE ICNMPR.152
      ITMX(7,1)=380   $ ITMX(7,2)=410   $ ITMX(7,3)=310   $ ITMX(7,4)=410
*DELETE ICNMPR.153
      ITMX(8,1)=650   $ ITMX(8,2)=410   $ ITMX(8,3)=610   $ ITMX(8,4)=410
*DELETE ICNMPR.171
   21 ITM(I)=410
*DELETE AUTSI1.2,365
      SUBROUTINE AUTSI1
      COMMON  /CFDATA/  DUM(530), DUM1(270), DUM2(300)
      COMMON  /IDATA/   IDUM1(200) , IDUM3(50)
      COMMON /INTVAR/  PARAM(480), TIME, INTDEX
      COMMON /CINT/ T,HMAX
      REAL MACH
      DIMENSION ALPHA(4),H(4),P(4),Q(4),R(4),INDOR(23)
      DIMENSION
     1 CBNZ(2), CCNZ(2), DVNZ(8), CBQQ(2), CCQQ(2), DVQQ(8)
     2,CBCOML(3), CCCOML(3), DVCOML(12), CBSE(2), CCSE(2), DVSE(8)
     3,CBRE(2), CCRE(2), DVRE(8),CBYR(2), CCYR(2), DVYR(8)
     4,CBNY(2),CCNY(2), DVNY(8), DVER2(8), DVERS(8), DVPHX(8), DVFPS(8)
      EQUIVALENCE
     A ( GKNZ2   ,DUM(105)),( GKFB    ,DUM(117)),( GKNZ1   ,DUM(119))
     B,( GKNL1   ,DUM(120)),( GKMECH  ,DUM(125)),( GKNL2   ,DUM(125))
     C,( GK6     ,DUM(143)),( GKF     ,DUM(152)),( GKNZ3   ,DUM(106))
      EQUIVALENCE
     A (CBNZ(1)  ,DUM(109)),(CCNZ(1)  ,DUM(111)),(CBQQ(1)  ,DUM(113))
     B,(CCQQ(1)  ,DUM(115)),(CBSE(1)  ,DUM(121)),(CCSE(1)  ,DUM(123))
     C,(CBCOML(1),DUM(153)),(CCCOML(1),DUM(156))
      EQUIVALENCE   ( DR      ,  DUM(  3))
      EQUIVALENCE   ( MACH    ,  DUM(038))
      EQUIVALENCE   ( GKQ     ,  DUM(191))
      EQUIVALENCE   ( GGNS    ,  DUM(425))
      EQUIVALENCE   ( GGNA    ,  DUM(426))
      EQUIVALENCE   ( DA      ,  DUM1( 94))
      EQUIVALENCE   ( DAHI    ,  DUM1(112))
      EQUIVALENCE   ( DALO    ,  DUM1(113))
      EQUIVALENCE   ( DSLU    ,  DUM1(114))
      EQUIVALENCE   ( DSLL    ,  DUM1(115))
      EQUIVALENCE   ( DSHI    ,  DUM1(116))
```

147

```
      EQUIVALENCE  ( DSLO           , DUM1(117))
      EQUIVALENCE  ( PUDHI ,  DUM1(121)) , (RUDLO , DUM1(122))
      EQUIVALENCE  ( PHIC          , DUM1(159))
      EQUIVALENCE  ( QCOM          , DUM1(162))
     +,(PUDCCM,DUM1(165))
      EQUIVALENCE  ( DDS           , DUM1(156))
      EQUIVALENCE  ( FP1,  DUM(530))
      EQUIVALENCE
     A ( CRSE(1) ,DUM2(041),( CCRE(1) ,DUM2(043)),( CRYR(1) ,DUM2(056))
     B,( CCYR(1) ,DUM2(058)),( CRNY(1) ,DUM2(062)),( CCNY(1) ,DUM2(064))
      EQUIVALENCE  ( IRUNNO, IDUM3(32))
      EQUIVALENCE (IPRNT,IDUM1(132))
      EQUIVALENCE
     1 ( IDNZ , INDOR( 1)) , ( IDQQ , INDOR( 2)), ( IDSE  ,INDOR( 3))
     2,( IDCCML, INDOR( 8)) , ( IDYR  , INDOR(12)), ( IDNY  ,INDOR(13))
      EQUIVALENCE
     A (DVER2(1),PARAM(129)),(DVERS(1),PARAM(137)),(DVPHX(1),PARAM(145))
     B,(DVFPS(1),PARAM(153))
      EQUIVALENCE ( ER2X , DVER2(5) ) , ( ER2I , DVER2(1) )
      EQUIVALENCE ( ERSX , DVERS(5) ) , ( ERSI , DVERS(1) )
      EQUIVALENCE ( FPHX , DVPHX(5) ) , ( FPHI , DVPHX(1) )
      EQUIVALENCE ( FPSX , DVFPS(5) ) , ( FPSI , DVFPS(1) )
      EQUIVALENCE (H(1)   ,PARAM(73)),(ALPHA(1),PARAM(17))
     *           ,(P(1)   ,PARAM(25)),(Q(1)    ,PARAM(33))
     *           ,(R(1)   ,PARAM(41))
      DATA  DDR / 57.29577951131/
      DATA     ERRAUT/ 8HAUTSI1 /
      RETURN
C
      ENTRY AUTSI2
      CALL INUPD (129,ADUMXX,IDUMXX)
      CALL INUPD (133,ADUMXX,IDUMXX)
      CALL INUPD (137,ADUMXX,IDUMXX)
      CALL INUPD (141,ADUMXX,IDUMXX)
      CALL INUPD (145,ADUMXX,IDUMXX)
      CALL INUPD (149,ADUMXX,IDUMXX)
      CALL INUPD (153,ADUMXX,IDUMXX)
      CALL INUPD (157,ADUMXX,IDUMXX)
      ISAVTR = 1
      DO 100 I = 1, 23
  100 INDOR(I) = -1
      NSWIT = 0
      RETURN
      ENTRY AUTS
      IF( ISAVTR.NE.1 )  GO TO 110
      IF (GKNL2.LT.1.0) GO TO 2
      II=GKNL2
      DELBHMAX*FLOAT(II)
      DELT=0.0
      GO TO 4
```

148

```
    2 DELT=1000000.
    4 CONTINUE
      IF (IRUNNO.GT.1)  GO TO 6
C  RECONVERT LIMITS FROM RADIANS TO DEGREES  (CONVERTED TO RADIANS IN
C  SUBROUTINE DATAIN)
      DSHI=DSHI*DDR
      DSLO=DSLO*DDR
      DSLU=DSLU*DDR
      DSLL=DSLL*DDR
      DAHI=DAHI*DDR
      DALO=DALO*DDR

      RUDHI=RUDHI*DDR
      RUDLO=RUDLO*DDR
      DSTAB=DDS*DDR
C-----     INITIAL  CONDITIONS
    6 IF (DSTAB.GT.DSHI) DSTAB=DSHI
      IF (DSTAB.LT.DSLO) DSTAB=DSLO
      R501=ALPHA(1)*DDR
      C501=R501*CBNZ(1)
      X5=C501
      R502=Q(1)*DDR
      C502=R502*CBQQ(1)
      X4=C502
      AZ3=GGMA*GKNZ2+X4*GKF
C  QB IS COMPACT PRESSURE  PS IS STATIC PRESSURE
      PS=PARAM(480)*1715.0*(518.7-0.003565*H(1))
      QB=PS*(((0.2*MACH**2+1.0)**3.5)-1.0)
      IF (QB.GT.3000.) GKNZ1=.083
      IF (QB.LE.3000.) GKNZ1=-.0002*QB+.683
      IF (QB.LE.860.)  GKNZ1=-.00089*QB+1.25
      IF (QB.LE.230.)  GKNZ1=1.0
      AX4=GKNZ1*X4*.7
      AU3=(-15.0 + AX4 + X5)*GKFB
      IF (AU3.LT.0.0) AU3=0.0
      IF (AU3.GT.999.0) AU3=999.0
      U3=AZ3+AU3
      R508=U3
      C508=CRCOML(1)*R508
C  FIX TO SET PITCH INPUT TO ZERO BY BIASING TRIM
C      X3=C508
C      X1=X3
C      C503=C508
C      R503=0.0
C      IF (CRCF(1).NE.0.0) R503=C503/CRSE(1)
C      U1=R503
C      DCOMD=(U1-.44)/0.318+7.25
       X1TRIM=-X3
       C503=0.0
       R503=0.0
```

149

```
      U1=0.0
      OCOMO=0.0
      X1=0.0
      AX1=0.0
      AX5=(X5+AX4-20.4)*GKN23
      IF (AX5.LT.0.0)    AX5=0.0
      IF (AX5.GT.939.0) AX5=999.0
C     GKNL1 IS FUNCTION OF DYNAMIC PRESSURE, QB
C     GAIN FACTOR CF 3.0 IS INCLUDED IN FUNCTION
      IF (QB.GT.3000.) GKNL1=3.*(.083)
      IF (QB.LE.3000.) GKNL1=3.*(-.0002*QB+.683)
      IF (QB.LE.800.)  GKNL1=3.*(-.00089*QB+1.25)
      IF (QB.LE.290.)  GKNL1=3.0
      AX6=(AX1+AX5)*GKNL1
      RATIO=QB/PS
      IF (RATIO.LE..53)   TRFAC=.5
      IF (RATIO.GT..53)   TRFAC=-1.19*RATIO+1.13
      IF (RATIO.GT.1.79)  TRFAC=-1.0
      X6=X5*TRFAC
      ERSI=DSTAB
      X2=ERST-X6-AX6
      ER2I=X2
      IF (GK6.NE.0.0) ER2I=X2/GK6
      AX2=0.0
      FPHI=0.0
      FPSI=0.0
      ISAVTR = 0
      IF (IRUNNO.GT.1)  GO TO 110
      CALL LINES(14)
      WRITE (IPRNT,30)
   30 FORMAT (1H1,1X,26HAUGMENTATION VARIABLE DUMP,//)
      WRITE(IPRNT,31) R501,C501,R502,C502,R503,C503,R508,C508
   31 FORMAT(1H0,5X,6H  R501,7X,6H  C501,7X,6H  R502,7X,6H  C502,7X,
     A  6H  R503,7X,6H  C503,7X,6H  R508,7X,6H  C508,/,1X,8E13.6,/)
      WRITE(IPRNT,33) AZ3,AU3,AX1,AX5,AX6,X6,DSTAB,X2
   33 FORMAT         (7X,6HAZ3  ,7X,6HAU3  ,7X,6HAX1  ,7X,6HAX5  ,
     A  7X,6HAX6  ,7X,6HX6   ,7X,6HDSTAB ,7X,6HX2   ,/,1X,8E13.6,/)
  110 CONTINUE
C-----     AS OF THE DATA  15 AUGUST, 1975 , THIS PROGRAM  USES
C          368 LOCATIONS   OF THE PARAM ARRAY. THE BREAKDOWN  IS
C                    PILTI1   -   52  LOCATIONS
C                    AUTSI1   -  188  LOCATIONS
C                    AIPFI1   -  128  LOCATIONS
C          WITHOUT  ALTERING  THE  PARAM  ARRAY  AND  CONSEQUENT  PROGRAM
C          LOGIC, AN ADDITIONAL  14  INTEGRATION VARIABLES CAN BE ADDED.
C          THESE  VARIABLES CAN BE INTEGRATED BY EXECUTING THE CALL  TO
C          EITHER INTEG  OR  TRANFR. IF ONE CHOOSES TO CALL INTEG, THEN
C          THE PARAMETER INTDEX MUST BE INCREASED BY 8 FOR EACH
C          ADDITIONAL  CALL TO INTEG.THAT IS INCORPORATED IN THE PROGRAM.
C          THE PARAMETER INTDEX IS INITIALIZED IN THE AIPFI1 SUBROUTINE.
```

```
C          LONGITUDINAL   CHANNEL   AUGMENTATION
C*****
      U5=ALPHA(1)*DDR
      IF (U5.GT.30.0) U5=30.0
      IF (U5.LT.-5.0) U5=-5.0
      CALL TRANFR( 2, CBNZ, 2, CCNZ, 8, DVNZ, ERRAUT, 501, U5,
     A          IDNZ, X5, C501, 0.0, C501, 0.0)
      U4=Q(1)*DDR
      CALL TRANFR( 2, CBQQ, 2, CCQQ, 8, DVQQ, ERRAUT, 502, U4,
     A          IDQQ, X4, R502, 0.0, C502, 0.0)
      AZ3=GGMA*GKNZ2+X4*GKF
C Q3 IS COMPACT PRESSURE  PS IS STATIC PRESSURE
      PS=PARAM(480)*1715.0*(518.7-0.003565*H(1))
      QB=PS*((((0.2*MACH**2+1.0)**3.5)-1.0)
      IF (QB.GT.3000.) GKNZ1=.083
      IF (QB.LE.3000.) GKNZ1=-.0002*QB+.683
      IF (QB.LE.800.)  GKNZ1=-.00089*QB+1.25
      IF (QB.LE.290.)  GKNZ1=1.0
      AX4=GKNZ1*X4*.7
      AU3=(-15.0 + AX4 + X5)*GKFB
      IF (AU3.LT.0.0) AU3=0.0
      IF (AU3.GT.999.0) AU3=999.0
      U3=AZ3+AU3
      CALL TRANFR( 3, CBCOML, 3, CCCOML, 12, DVCOML, ERRAUT, 508, U3,
     A         IDCOML , X3, R508, 0.0, C508, 0.0)
      FP1=QCOM+QCOMO
      IF (FP1.GT. 7.25)  U1=.318*(FP1-7.25)+.44
C REMOVE DEADBAND BETWEEN -1.75 AND 1.75
      IF (FP1.LE. 7.25)  U1=.06069*FP1
C     IF (FP1.LE. 7.25)  U1=.08*(FP1-1.75)
C     IF (FP1.LE. 1.75)  U1=0.
C  .  IF (FP1.LE.-1.75)  U1=.08*(FP1+1.75)
      IF (FP1.LE.-7.25)  U1=.742*(FP1+7.25)-.44
      IF (U1.LT.-4.0) U1=-4.0
      IF (U1.GT.8.0) U1=8.0
      CALL TRANFR( 2,CBSE, 2, CCSE, 8, DVSE, ERRAUT, 503, U1,
     A          IDSE , X1, P503, 0.0 , C503, 0.0)
      AX1=X3-X1+X1TRIM
      AX5=(X5+AX4-20.4)*GKNZ3
      IF (AX5.LT.0.0)   AX5=0.0
      IF (AX5.GT.999.0) AX5=999.0
C GKNL1 IS FUNCTION OF DYNAMIC PRESSURE, QB
C GAIN FACTOR OF 3.0 IS INCLUDED IN FUNCTION
      IF (QB.GT.3000.) GKNL1=3.*(.083)
      IF (QB.LE.3000.) GKNL1=3.*(-.0002*QB+.683)
      IF (QB.LE.800.)  GKNL1=3.*(-.00083*QB+1.25)
      IF (QB.LE.280.)  GKNL1=3.0
      AX6=(AX1+AX5)*GKNL1
      RATIO=QB/PS
      IF (RATIO.LE..53)  TRFAC=.5
```

151

```
      IF (RATIO.GT..53)   TRFAC=-1.19*RATIO+1.13
      IF (RATIO.GT.1.79)   TRFAC=-1.0
      X6=X5*TRFAC
      X7=AX6+X2
      X8=X6+X7
      IF (X8.GT.DSLU) GO TO 40
      IF (X8.LT.DSLL) GO TO 42
      X9=0.0
      GO TO 44
   40 X9=GK6*(X8+DSLL)
      GO TO 44
   42 X9=GK6*(X8+DSLU)
   44 U2=AX6-X9-AX2
      ER2X=U2
      CALL INTEG(ER2X,ER2I)
      X2=GK6*ER2I
      IF (X2.GT.DSLU) GO TO 46
      IF (X2.LT.DSLL) GO TO 48
      AX2=0.C
      GO TO 49
   46 AX2=2000.*(X2+DSLL)
      GO TO 49
   48 AX2=2000.*(X2+DSLU)
   49 CONTINUE
      STACOM=X6+X7
      RSTB=200.0*(STACOM-ERSI)
      IF (RSTB.GT. 60.0) RSTB= 60.0
      IF (RSTB.LT.-60.0) RSTB=-60.0
      ERSX=RSTB
      CALL INTEG(ERSX,ERSI)
      DST=ERSI
      IF (DST.GT.DSHI) DST=DSHI
      IF (DST.LT.DSLO) DST=DSLO
      DDS=DST/DDR
C----------
C
C                 LATERAL - DIRECTIONAL AUGMENTATION
C----------
C AILERON  CHANNEL COMMANDS
      FA=PHIC
      IF (FA.LT.-11.0) PHIC1=38.0*FA+338.0
      IF (FA.GE.-11.0) PHIC1=12.0*FA+52.0
      IF (FA.GE. -6.0) PHIC1= 3.333333333*FA
      IF (FA.GE.  6.0) PHIC1=12.0*FA-52.0
      IF (FA.GT. 11.0) PHIC1=38.0*FA-338.0
      CALL TRANFF( 2, CBRE, 2, CCRE, 8, DVRE, ERRAUT, 511, PHIC1,
     *          IDRE , PHIC2, 0., 0., 0., 0.)
      PHIC3=0.12*(P(1)*DDR-PHIC2)
      FPHA=20.0*(PHIC3-FPHI)
      IF (FPHA.LT.-80.0) FPHA=-80.0
      IF (FPHA.GT. 80.0) FPHA= 80.0
```

152

```
      FPHX=FPHA
      CALL INTEG(FPHX,FPHI)
      DDA=FPHI
      IF (DDA.GT.DAHI) DDA=DAHI
      IF (DDA.LT.DALO) DDA=DALO
      DA=DDA/DDA
C  RUDDER CHANNEL COMMANDS
      RUDC1=RUDCOM
      IF (RUDC1.GE. 15.0)  RUDC2=0.316*RUDC1-64.75
      IF (RUDC1.LT. 15.0)  RUDC2=0.0
      IF (RUDC1.LE.-15.0)  RUDC2=0.316*RUDC1+64.76
      YAWFB=F(1)*DDR-X5*P(1)
      R1=R(1)
      P1=P(1)
      CALL TRANFR(2 ,CBNY, 2, CCNY, 8 , DVNY , ERRAUT , 513 , YAWFB,
     *            IDNY , RFB1,  C., 0., 0., 0. )
      CALL TRANFR ( 2,CBYR, 2, CCYR, 8, DVYR , ERRAUT, 512, RFB1,
     *            IDYR , RFB2,  0., 0., 0., 0. )
      F8=RFB2+0.6*GGNS
      IF (RATIO.GT.3.3) AKF8=F8
      IF (RATIO.LE.3.3) AKF8=F8*(0.435*RATIO-0.305)
      IF (RATIO.LE.2.0) AKF8=0.5*F8
      RUDDC=AKF8-RUDC2
      FPSA=2..0*(RUDDC-FPSI)
      IF (FPSA.GT. 120.0) FPSA= 120.0
      IF (FPSA.LT.-120.0) FPSA=-120.0
      FPSX=FFSA
      CALL INTEG(FPSX,FPSI)
      DRR=FPSI
      IF (DRR.GT.RUDHI) DRR= RUDHI
      IF (DRR.LT.RUDLO) DRR= RUDLO
      DR=DRR/DCR
      IF (IRUNNO.GT.1)  GO TO 80
      IF (DELT.GT.T) GO TO 90
   60 IF (DELT.GT.0.0) GO TO 65
      WRITE(JPRNT,51)
   51 FORMAT(1H1,25H1AUGMENTATION TIME HISTORY,//,5X,6HTIME  ,7X,6HU1
     A      ,7X,6HGGNA  ,7X,6HU4    ,7X,6HU5    ,7X,5HAX6  ,7X,6HX6   ,
     B       7X,6HSTACOM,7X,6HRFSX  ,7X,6HERSI  )
      WRITE(JPRNT,53)
   53 FORMAT          (18X,6HPHIC1 ,7X,6HP1    ,7X,6HPHIC2 ,7X,6HPHIC3 ,
     A  ,7X,6HPHI  ,7X,6HR1    ,7X,6HYAWFB ,7X,5HRFB1  ,7X,6HRFB2  )
      WRITE(JPRNT,57)
   57 FORMAT          (18X,6HF8    ,7X,6HAKF8  ,7X,6HRUDCOM,7X,6HRUDC2 ,
     A      7X,6HX5    ,7X,6HRUDDC ,7X,6HFPSA  ,7X,5HPSI  ,7X,6HGGNS  )
      WRITE(JPRNT,59)
   59 FORMAT          (18X,6HPS    ,7X,6HDR    ,//)
   65 DELT=DELT+DEL
   70 WRITE(JPRNT,71) T,U1,GGNA,U4,U5,AX6,X6,STACOM,RSTB,DST
   71 FORMAT(1X,10E13.6)
```

153

```
      WRITE(IPRNT,73)  PHIC1,P1,PHIC2,PHIC3,DDA,R1,YAWFB,RFB1,RFB2
73 FORMAT(14X,9E13.6)
      WRITE(IPRNT,73)  F8,AKF8,RUDCOM,RUD32,X5,RUDDC,FPSA,DRR,GGNS
      WRITE(IPRNT,77)  PS,GB
77 FORMAT(14X,2E13.6)
80 CONTINUE
      RETURN
      END
```

Appendix D
EASY Analysis Program Data

The program commands of the EASY Analysis program are included in Appendix D.

Table parameters specify the independent and dependent variables for the table look-up gain parameters of the system model. The parameter values which satisfy the input requirements of the standard components are listed following the tabular entries.

The longitudinal axis stability derivatives for the F-16 aircraft at the selected flight condition of .8 Mach and 20,000 feet are shown on page 157. In addition, page 157 shows the commands necessary for generating a steady state system solution and establishing the aircraft trim condition.

The frequency domain analysis is completed with program commands to establish a pseudo tracking task. Program commands for both closed loop and open loop analysis are completed on pages 157 and 158.

The EASY Analysis program data list is concluded with program commands to generate a closed loop system time response to a reference step input.

155

```
TABLE,FTAFUE1,4
-17.65,-7.25,7.25,40.
-4.,-.44,.44,16.35
TABLE,FTAFUE2,4
0.,34.,184.,200.
-1.,-1.,-4.,-4.
TABLE,FTAFUE3,5
0.,280.,900.,3000.,6000.
.7,.7,.3771,.0581,.0581
TABLE,FTAFUE4,5
0.,280.,900.,3000.,6000.
3.,3.,1.999,.249,.0581
TABLE,FTAFUE5,4
0.,.53,1.79,2.0
.5,.5,-1.0,-1.0
TABLE,FTAFUE6,4
-50.,-25.,25.,50.
-25.,0.,0.,25.
PARAMETER VALUES
AN FUE1=-1,AN FUE2=-1,AN FUE3=-1,AN FUE4=-1
AN FUE5=-1,AN FUE6=1
C1 MAF1=1.
C1 SAF2=.5,C3 SAF2=8.,C4 SAF2=.5
C3 SAF3=30.,C6 SAF3=-5.
Z0 LGE1=10.,P0 LGE1=10.
GAILEE2=1.,Z0 LEE2=0.,P0 LEE2=1.
C2 MCE1=1.,C3 MCE1=1.,C4 MCE1=0.,X3 MCE1=-20.4
C2 MCE2=1.,C3 MCE2=1.,C4 MCE2=0.,X3 MCE2=-15.
C6 SAE4=0.
C1 MCE3=.161,C2 MCE3=.167,C3 MCE3=0.5,C4 MCE3=0.
C1 SAE5=.5,C6 SAE5=0.
GAILEE3=3.0,Z0 LEE3=4.,P0 LEE3=12.
C1 MCE4=1.,C2 MCE4=1.,C3 MCE4=-1.,C4 MCE4=0.
C2 MCE5=-5.,C3 MCE5=0.,C4 MCE5=0.,X3 MCE5=0.
SKIITE1=5.,GKLITE1=2000.,AMAITE1=25.,AMIITE1=-25.
C2 MAE2=0.
C3 MCE6=0.,C4 MCE6=0.,X3 MCE6=0.
C1 MAE3=1.
C1 MAF4=1.
Z1 TEF1=0.,Z0 TEF1=2704.,P1 TEF1=72.8,P0 TEF1=2704.
C1 MAF3=-1.
C1 SAF1=20.,C3 SAF1=3.,C4 SAF1=20.,C6 SAF1=-3.
Z0 LGF1=1.,P0 LGF1=0.
C3 SAF2=25.,C6 SAF2=-25.
C1 MAE2=.0010292
```

```
GAILEPL=349.040      ZO LEPL=0.0      PO LEPL=20.0
GAILAPL=2.1815       TO LAPL=.05
 C1 SAPL=1.0E-06,C2 SAPL=1.0,C3 SAPL=0.0,C4 SAPL=1.0E-06
C5 SAPL=1.0          C6 SAPL=0.0
Z1 TFPL=0.0     Z3 TFPL=1.0      P1 TFPL=1.2      PJ TFPL=1.0
C1 MCPL=1.0     C2 MCPL=1.0      C3 MCPL=1.0      C4 MCPL=0.0
ZO LGPL=.25          PO LGPL=0.0
C1 MAPL=-1.0     C2 MAPL=5.5
TX SD=0.,VD SD=0.,TZ SD=0.
IXXSD=3007.5     IYYSD=49955.     IZZSD=55770.     IXZSD=198.
ID1AV=3.
VS AV=829.5      ALSAV=2.1039      S  AV=300.
XD LO=-.0250    XA LO=-.0201     XU LO=-.0746     XDELO=.0523
ZD LO=-.1443    ZA LO=-4.8139    ZADLO=.5509      ZQ LO=-2.5965
ZU LO=-.1215    ZDELO=-.4985     MD LO=-.0132     MALLO=.3943
MADLO=-.9550    MQ LO=-2.3137    MU LO=-.0145     MDELO=-.6659
MA1LO=590.5      C  LO=11.32
XP1LO=0.0,FZ1LO=0,TY1LO=0
C1 MCZ1=.0311,C2 MCZ1=-.0311,C3 MCZ1=0.,C4 MCZ1=-1,X3 MCZ1=0.
C1 MAET=-1.,C2 MAET=20000.
ZO LGET=.1,PO LGET=0.
C1 MAEN=-1.,C2 MAEN=829.5,ZO LGEN=10.,PO LGEN=0.
ZO LGE2=6.3,PO LGE2=8.3
INT CONTROLS
V  SD=0.,P  SD=0.,R  SD=0.,ROLSD=0.,YAWSD=0.
ERROR CONTROLS=  U  SD=.8,W  SD=.06,Q  SD=.1E-03
    X2 LGEN=4.,X2 LGET=.2E-05,X2 LGE2=.9E-06,X2 LGE1=.4E-02
    X2 TFF1=.001,X2 LGF1=.001,PITSD=.4E-02,ALTSD=20.
    XI LEE3=.2E-05,X2 ITE1=.004,XI TFF1=.1
    XI LEPL=.0,X2 LAPL=.005,XI TFPL=.006,X2 TFPL=.005
    X2 LGPL=.002,XI LEE2=.4E-05
INITIAL CONDITIONS
ALTSD=20000,U  SD=829.5
PRINT CONTROL=3
PLOT ON
PRINTER PLOTS
INT CONTROL= X2 LGPL=0
STEADY STATE
XIC-X
INT CONTROL= X2 LGEN=0, X2 LGET=0
INT CONTROL= X2 LGPL=1
LINEAR ANALYSIS
TITLE=THETA/THETAREF CLOSED LOOP NORMAL ACCEL
TF INPUT= C2 MAPL
TF OUTPUT= PITSD
```

157

```
TF MANUAL SCALES
FREQ MIN=.001
FREQ MAX=100.
BODE,TRANSFER FUNCTION
TITLE=THETA/THETAREF OPEN LOOP NORMAL ACCEL
PARAMETER VALUES= C1 MAPL=0.0
TF INPUT= C2 MAPL
TF OUTPUT= PITSD
TF MANUAL SCALES
FREQ MIN=.01
FREQ MAX=100.
BODE,TRANSFER FUNCTION
PARAMETER VALUES= C1 MAPL=-1.0
TINC=.05
TMAX=20.0
OUTRATE=1.0
PRATE=20
INT MODE=2
TITLE=CLOSED LOOP STEP RESPONSE
DISPLAY1
PITSD        VS      TIME
Q  SD        VS      TIME
ALTSD        VS      TIME
X2 LGF1      VS      TIME
SIMULATE
```

Vita

Michael Marchand was born in Gonzales, Louisiana on April 6, 1948. He attended Gonzales High School there and graduated as valedictorian of his class in 1966. He entered undergraduate studies at Louisiana State University and received his B.S. degree in Electrical Engineering and his ROTC Air Force commission in 1971. Later that year, he began active duty in the Air Force as an Undergraduate Pilot Training student at Laughlin AFB, Texas. After receiving his wings, he attended Pilot Instructor Training at Randolph AFB and then spent the next two years at Laughlin as an instructor in the T-37 aircraft. From 1974-76, he enjoyed a tour at Mather AFB as an instructor pilot in Undergraduate Navigator Training, being a member of the first T-37 squadron. While at Mather, he accepted the additional duty of Functional Check Flight pilot for the T-37 maintenance squadron. In 1976, he entered the Air Force Institute of Technology at Wright-Patterson AFB to attain a Masters degree in Electrical Engineering, specializing in aircraft guidance and control. He is married and has two children.

Permanent address: Route 4 Box 245-M

Gonzales, Louisiana   70737

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFIT/GGC/EE/77-7	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PITCH RATE FLIGHT CONTROL FOR THE F-16 AIRCRAFT TO IMPROVE AIR-TO-AIR COMBAT		5. TYPE OF REPORT & PERIOD COVERED MS Thesis
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Michael A. Marchand Capt USAF		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Air Force Institute of Technology(AFIT-EN) Wright-Patterson AFB, Ohio 45433		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Project 7071-00-12
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Flight Dynamics Laboratory, FGLC Wright-Patterson AFB OH 45433		12. REPORT DATE December, 1977
		13. NUMBER OF PAGES 173
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

Approved for public release; IAW AFR 190-17

Jerral F. Guess, Captain, USAF
Director of Information

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

Digital simulations were developed to implement a pitch rate control system for the F-16 aircraft engaged in aerial gunnery. First, the EASY Modelling and Analysis Program by Boeing Computer Services was adapted to implement a longitudinal axis F-16 aircraft, flight control system, and pilot model. Comparison of closed loop system responses indicated a proposed pitch rate flight control configuration would improve target tracking

DD FORM 1473   EDITION OF 1 NOV 65 IS OBSOLETE

performance. The Terminal Aerial Weapon Delivery Simulation (TAWDS) program by McDonnell Douglas Corporation was adapted for the F-16 aircraft. A non-linear, six-degree-of-freedom aircraft model, multi-axis flight control system, and multi-axis pilot model were developed to demonstrate target tracking capabilities. Eight different air-to-air scenarios were developed to simulate evasive encounters with an F-4 target aircraft. Time history target tracking errors indicated the improved tracking performance of the proposed pitch rate flight control configuration over the present normal acceleration configuration of the F-16 aircraft.